

# Environment

Dust-tight/Water-jet-proof (IP65 Equivalent/IP67 Equivalent)

Dust-tight/Water-jet-proof (IP65 Equivalent)

Clean Room Specification


Secondary Battery Compatible

Dust-tight/Water-jet-proof (IP65 Equivalent/IP67 Equivalent)

**Rod Type LEY□E-X8** Size 25, 32, 40

Battery-less Absolute (Step Motor 24 VDC)

p. 887




Metal connector

**Rod Type LEY-X7** Size 25, 32, 40

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

p. 903



Seal connector

Dust-tight/Water-jet-proof (IP65 Equivalent)

**Rod Type LEY-X5** Size 25, 32

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

p. 917

**Rod Type LEY-X5** Size 25, 32

AC Servo Motor


p. 925, 931

**Rod Type LEY Series** Size 63

AC Servo Motor

p. 473, 489

\* Option

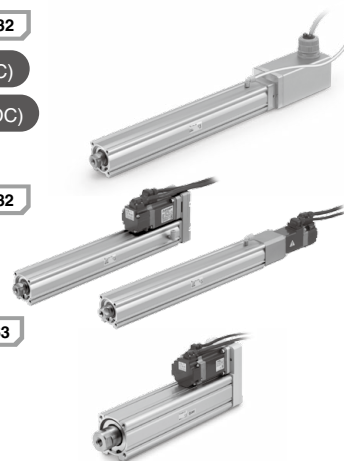

Clean Room Specification

p. 938


**Slider Type Ball Screw Drive**

11-LEFS Series

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

p. 943



**Slider Type Ball Screw Drive**

11-LEFS Series


AC Servo Motor

p. 953, 955

**Support Guide for Ball Screw Drive Actuator**

11-LEFG Series

p. 961




**High Rigidity Slider Type**

**Ball Screw Drive**

11-LEJS Series

AC Servo Motor

p. 967, 969



Secondary Battery Compatible

p. 974


**Slider Type Ball Screw Drive**

25A-LEFS Series

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

p. 975

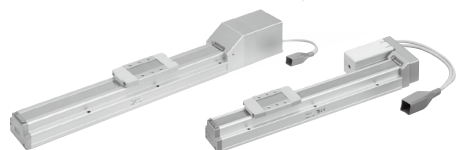

**Slider Type Ball Screw Drive**

25A-LEFS Series

AC Servo Motor

p. 979, 980



**High Rigidity Slider Type Ball Screw Drive**

25A-LEJS Series

AC Servo Motor

p. 981, 982



**Rod Type 25A-LEY Series**

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

p. 983







**Rod Type 25A-LEY Series**

AC Servo Motor


p. 987, 989



Series	Dust-tight/Water-jet-proof		Size	Battery-less absolute (Step motor 24 VDC)	Incremental (Step motor 24 VDC)	Incremental (Servo motor 24 VDC)	AC servo motor
	IP65 equivalent/ IP67 equivalent	IP65 equivalent					
<b>LEY□E-X8</b> Metal connector 	●		25 32 40	●			
<b>LEY-X7</b> Seal connector 	●		25 32 40		●	●	
<b>LEY-X5</b> 		●	25 32		●	●	●
<b>LEY63□□□-□P</b> 		●	63				●

## Enclosure

### Degrees of Protection



#### First Digit: Degree of protection against solid foreign objects

Degrees	Degree of protection
0	Not protected
1	Protected against solid foreign objects of 50 mmø and larger
2	Protected against solid foreign objects of 12 mmø and larger
3	Protected against solid foreign objects of 2.5 mmø and larger
4	Protected against solid foreign objects of 1.0 mmø and larger
5	Dust protected
6	Dust-tight

#### Second Digit: Degree of protection against water

Degrees	Degree of protection	
0	Not protected	—
1	Protected against vertically falling water droplets	Dripproof type 1
2	Protected against vertically falling water droplets when enclosure is tilted up to 15°	Dripproof type 2
3	Protected against rainfall when enclosure is tilted up to 60°	Rainproof type
4	Protected against splashing water	Splashproof type
5	Protected against water jets	Water-jet-proof type
6	Protected against powerful water jets	Powerful water-jet-proof type
7	Protected against the effects of temporary immersion in water	Immersible type
8	Protected against the effects of continuous immersion in water	Submersible type

#### Example) Degrees of protection


Degrees of protection			Details
IP65	Solid foreign objects	Dust-tight	Dust particles are prevented from entering the device.
	Entry of water	Water-jet-proof*1	The direct application of water jets to the device from any direction will not cause any damage.
IP67	Solid foreign objects	Dust-tight	Dust particles are prevented from entering the device.
	Entry of water	Immersible*1	The amount of water that enters the device when the actuator (in the stopped state) is submersed in up to 1 m of water for up to 30 mins will not cause any damage.

\*1 Be sure to take appropriate protective measures if the product is to be used in an environment where it will be constantly exposed to water or fluids other than water splash.  
In particular, the product cannot be used in environments where oils, such as cutting oil or cutting fluid, are present.

## LEY-X8 Series Size 25, 32, 40


Battery-less Absolute (Step Motor 24 VDC)

p. 887

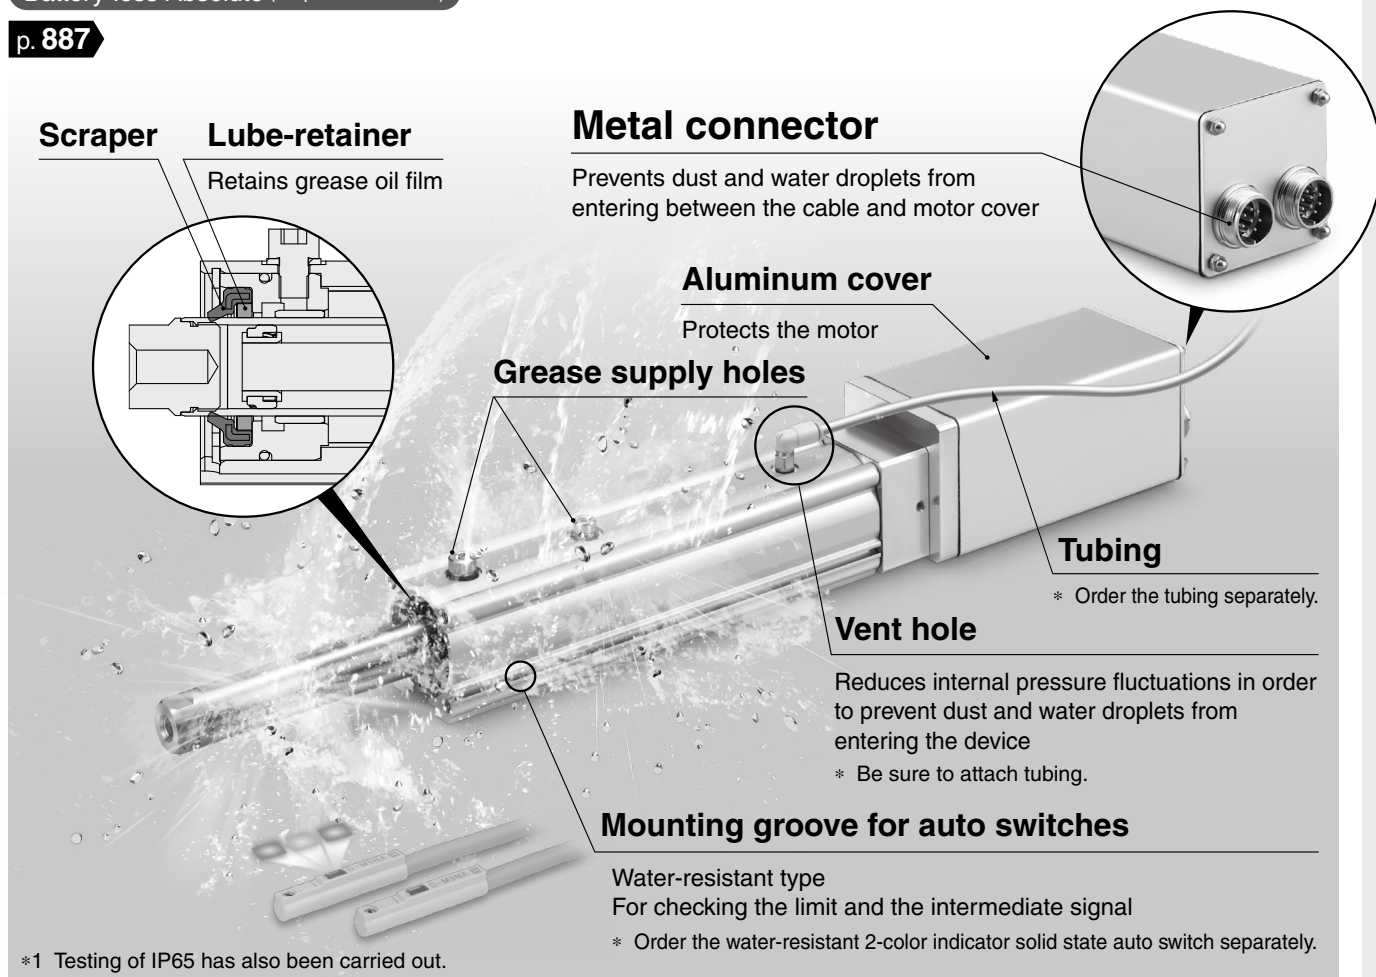


## Battery-less absolute encoder compatible

### Application Examples

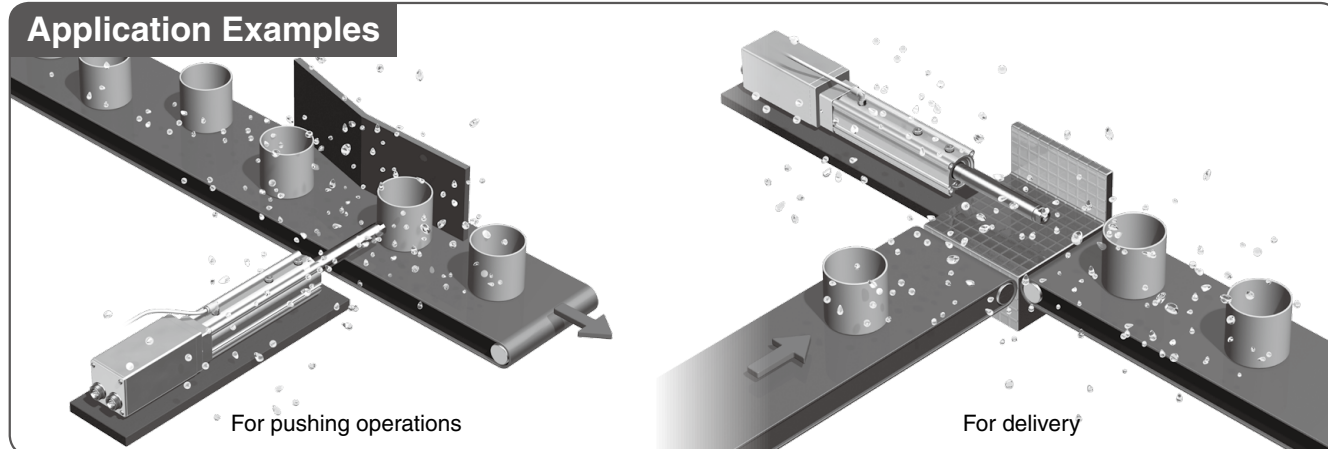

# Model Selection

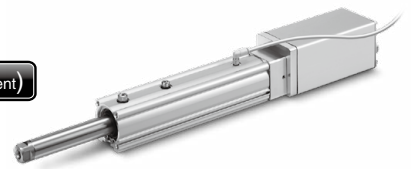


## Speed-Work Load Graph (Guide)

### Horizontal


#### LEY25□E-X8

▨ for acceleration/deceleration: 2000 mm/s<sup>2</sup>

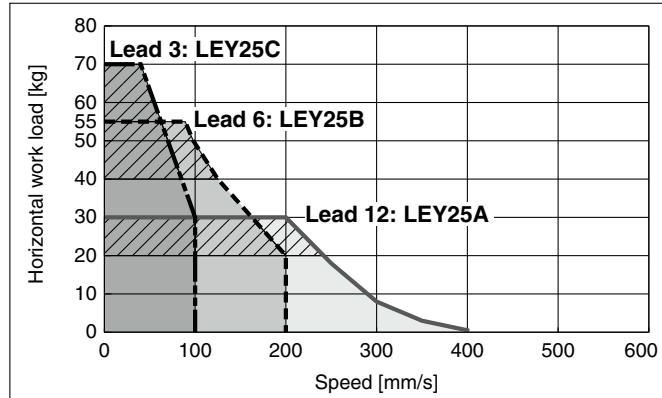


#### LEY32□E-X8

▨ for acceleration/deceleration: 2000 mm/s<sup>2</sup>

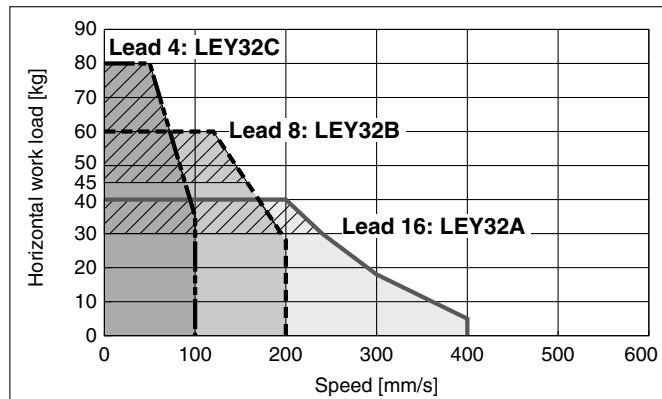


#### LEY40□E-X8

▨ for acceleration/deceleration: 2000 mm/s<sup>2</sup>

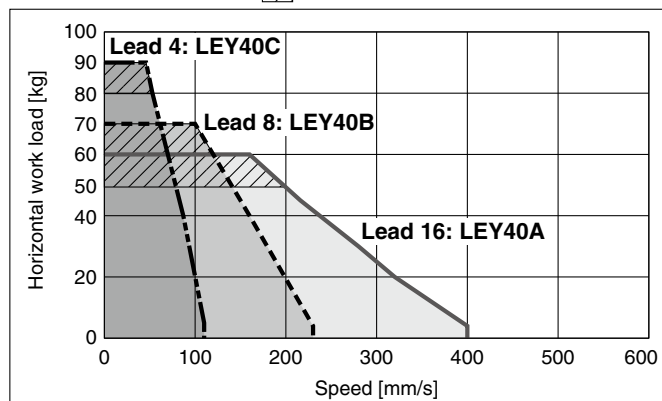


### Vertical


#### LEY25□E-X8

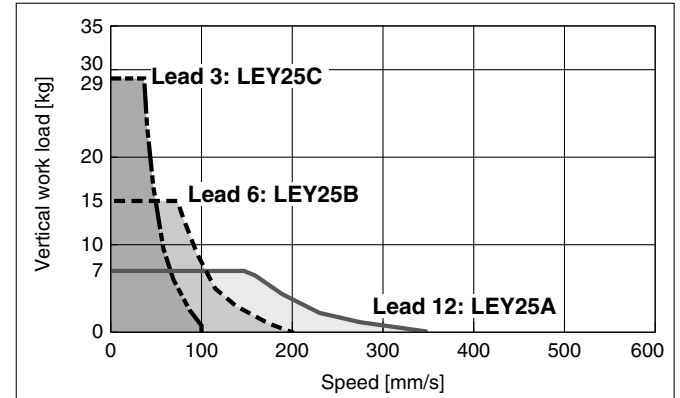

#### LEY32□E-X8

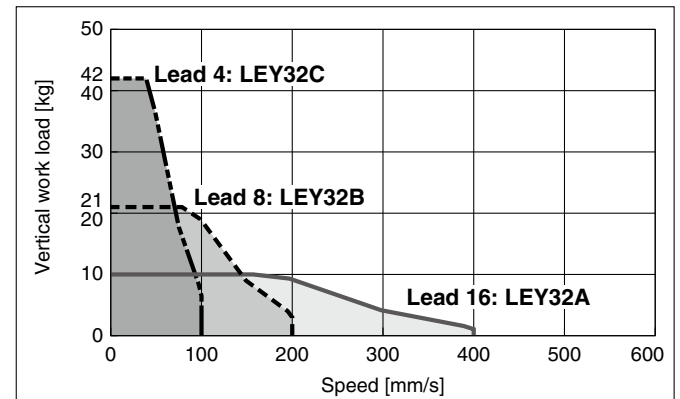

#### LEY40□E-X8

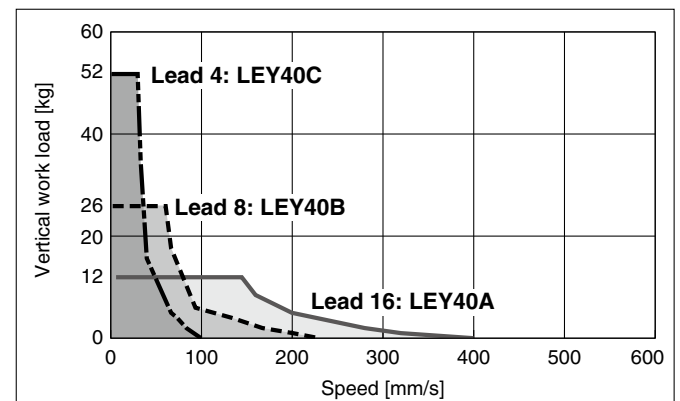




Items not listed are the same as those of the standard product.  
For details, refer to page 421.

## Force Conversion Graph (Guide)


### Battery-less Absolute (Step Motor 24 VDC)

#### LEY25□E-X8

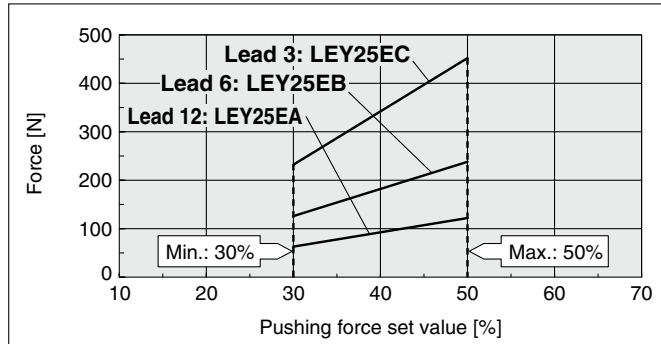


Ambient temperature	Pushing force set value [%]	Duty ratio [%]	Continuous pushing time [min]
40°C or less	50 or less	100	No restriction

#### LEY32□E-X8

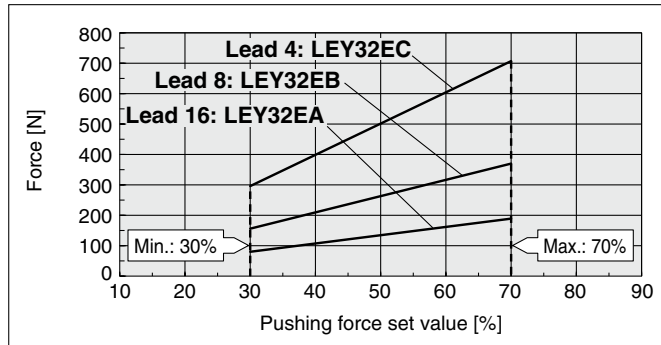

Ambient temperature	Pushing force set value [%]	Duty ratio [%]	Continuous pushing time [min]
40°C or less	70 or less	100	No restriction

#### LEY40□E-X8

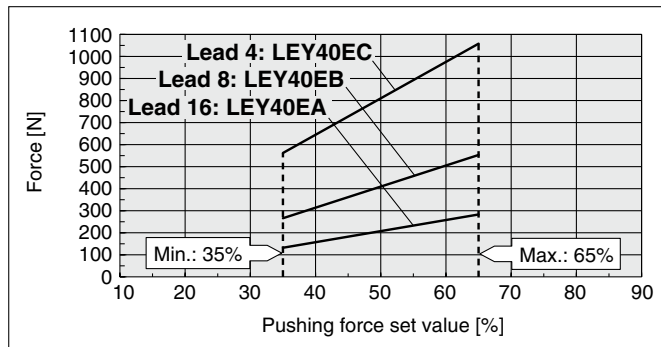

Ambient temperature	Pushing force set value [%]	Duty ratio [%]	Continuous pushing time [min]
40°C or less	65 or less	100	No restriction

### <Limit Values for Pushing Force and Trigger Level in Relation to Pushing Speed> Without Load

Model	Lead	Pushing speed [mm/s]	Pushing force (Setting input value)
LEY25□E	A/B/C	21 to 35	40 to 50%
LEY32□E	A	24 to 30	50 to 70%
	B/C	21 to 30	
LEY40□E	A	24 to 30	50 to 65%
	B/C	21 to 30	

There is a limit to the pushing force in relation to the pushing speed. If the product is operated outside of the range (low pushing force), the completion signal [INP] may be output before the pushing operation has been completed (during the moving operation).  
If operating with the pushing speed below the min. speed, please check for operating problems before using the product.

### <Set Values for Vertical Upward Transfer Pushing Operations>

For vertical loads (upward), set the pushing force to the max. value shown below and operate at the work load or less.


Model	LEY25□E			LEY32□E			LEY40□E		
Lead	A	B	C	A	B	C	A	B	C
Work load [kg]	2.5	5	10	4.5	9	18	7	14	28
Pushing force	50%			70%			65%		

# LEY-X8 Series


Battery-less Absolute (Step Motor 24 VDC)

Dust-tight/Water-jet-proof (IP65 Equivalent/IP67 Equivalent)

## Graph of Allowable Lateral Load on the Rod End (Guide)

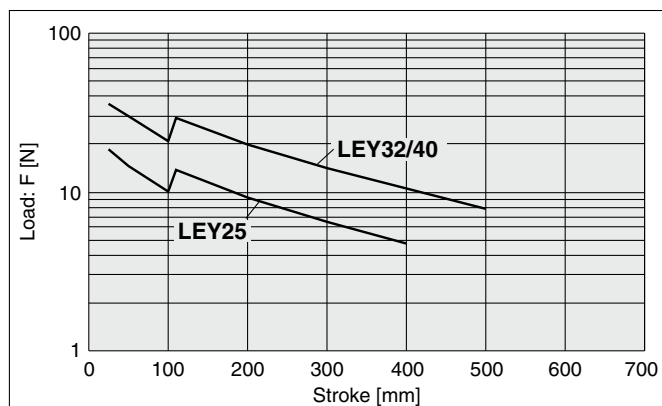

[Stroke] = [Product stroke] + [Distance from the rod end to the center of gravity of the workpiece]

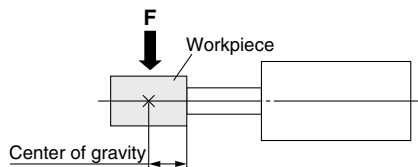


\* The changes in the graph waveforms are due to the difference in components of different product strokes.


## Rod Displacement: $\delta$ [mm]

Stroke Size	30	50	100	150	200	250	300	350	400	450	500
<b>25</b>	±0.3	±0.4	±0.7	±0.7	±0.9	±1.1	±1.3	±1.5	±1.7	—	—
<b>32/40</b>	±0.3	±0.4	±0.7	±0.6	±0.8	±1.0	±1.1	±1.3	±1.5	±1.7	±1.8

\* The values without a load are shown.



## Non-rotating Accuracy of Rod



Size	Non-rotating accuracy $\theta$
<b>25</b>	±0.8°
<b>32/40</b>	±0.7°

\* Avoid using the electric actuator in such a way that rotational torque would be applied to the piston rod.

This may cause the deformation of the non-rotating guide, abnormal auto switch responses, play in the internal guide, or an increase in the sliding resistance.



Battery-less Absolute (Step Motor 24 VDC)

# Rod Type

Dust-tight/Water-jet-proof (IP65 Equivalent/IP67 Equivalent)


CE UK  
CA  
\* For details, refer to page 1343 and onward.

## LEY-X8 (Made to Order) Series LEY25, 32, 40

RoHS

Refer to pages 883 to 885 for model selection.

### How to Order

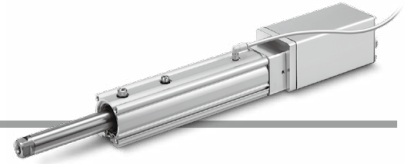

LEY **25** **D** **E** **B** - **50**    - **M1** **CD17T** - **X8**

1 2 3 4 5 6 7 8 9 10

For details on controllers, refer to page 888.

• Made to order:  
Dust-tight/  
Water-jet-proof

#### 1 Size

25
32/40

#### 2 Motor mounting position

D	In-line
---	---------

#### 3 Motor type

E	Battery-less absolute (Step motor 24 VDC)
---	--

#### 4 Lead [mm]

Symbol	LEY25	LEY32/40
A	12	16
B	6	8
C	3	4

#### 5 Stroke [mm]

30	30
to	to
500	500

\* For details, refer to the applicable stroke table below.

#### 6 Motor option

Nil	Without option
B	With lock

#### 7 Rod end thread

Nil	Rod end female thread
M	Rod end male thread (1 rod end nut is included.)

#### 8 Mounting\*2

Symbol	Type	Motor mounting position
		In-line
Nil	Ends tapped/ Body bottom tapped*3	●
F	Rod flange*3	●

#### 9 Actuator cable type/length

Robotic cable [m]			
MN	None	M8	8*4
M1	1.5	MA	10*4
M3	3	MB	15*4
M5	5	MC	20*4

#### Applicable Stroke Table\*1

●: Standard

Model	Stroke [mm]	30	50	100	150	200	250	300	350	400	450	500	Manufacturable stroke range
LEY25		●	●	●	●	●	●	●	●	●	—	—	30 to 400
LEY32/40		●	●	●	●	●	●	●	●	●	●	●	30 to 500

\* For auto switches, refer to page 894.

\* "-X8" is not added to an actuator model with a controller part number suffix.  
Example) "LEY25DEB-100" for the LEY25DEB-100M-M1CD17T-X8

## 10 Controller

<b>Nil</b>	Without controller
<b>C□1□□</b>	With controller

**C D 1 7 T**

### Interface (Communication protocol/Input/Output)

Symbol	Type	Number of axes, Special specification	
		Standard	With STO sub-function
<b>5</b>	Parallel input (NPN)	●	
<b>6</b>	Parallel input (PNP)	●	
<b>E</b>	EtherCAT	●	●
<b>9</b>	EtherNet/IP™	●	●
<b>P</b>	PROFINET	●	●
<b>D</b>	DeviceNet®	●	
<b>L</b>	IO-Link	●	●
<b>M</b>	CC-Link	●	

### Mounting

<b>7</b>	Screw mounting
<b>8*5</b>	DIN rail

### Number of axes, Special specification

Symbol	Number of axes	Specification
<b>1</b>	Single axis	Standard
<b>F</b>	Single axis	With STO sub-function

### Communication plug connector, I/O cable\*6

Symbol	Type	Applicable interface
<b>Nil</b>	Without accessory	—
<b>S</b>	Straight type communication plug connector	DeviceNet® CC-Link Ver. 1.10
<b>T</b>	T-branch type communication plug connector	
<b>1</b>	I/O cable (1.5 m)	Parallel input (NPN) Parallel input (PNP)
<b>3</b>	I/O cable (3 m)	
<b>5</b>	I/O cable (5 m)	

- \*1 Please contact SMC for non-standard strokes as they are produced as special orders.
- \*2 The mounting bracket is shipped together with the product but does not come assembled.
- \*3 For the horizontal cantilever mounting of the rod flange, or ends tapped types, use the actuator within the following stroke range.  
· LEY25: 200 or less · LEY32/40: 100 or less

- \*4 Produced upon receipt of order
- \*5 The DIN rail is not included. It must be ordered separately.
- \*6 Select "Nil" for anything other than DeviceNet®, CC-Link, or parallel input.  
Select "Nil," "S," or "T" for DeviceNet® or CC-Link.  
Select "Nil," "1," "3," or "5" for parallel input.

## ⚠ Caution

### [CE/UKCA-compliant products]

EMC compliance was tested by combining the electric actuator LEY series and the controller JXC series.  
The EMC depends on the configuration of the customer's control panel and the relationship with other electrical equipment and wiring. Therefore, compliance with the EMC directive cannot be certified for SMC components incorporated into the customer's equipment under actual operating conditions. As a result, it is necessary for the customer to verify compliance with the EMC directive for the machinery and equipment as a whole.

### [Precautions relating to differences in controller versions]

When the JXC series is to be used in combination with the battery-less absolute encoder, use a controller that is version V3.4 or S3.4 or higher.  
For details, refer to pages 1077 and 1078.

## The actuator and controller are sold as a package.

Confirm that the combination of the controller and actuator is correct.

### <Check the following before use.>

- \*1 Check the actuator label for the model number.  
This number should match that of the controller.

**LEY25DEB-100**

\*1



\* Refer to the Operation Manual for using the products. Please download it via our website:  
<https://www.smcworld.com>

Type	Step data input type	EtherCAT direct input type	EtherCAT direct input type with STO sub-function	EtherNet/IP™ direct input type	EtherNet/IP™ direct input type with STO sub-function	PROFINET direct input type	PROFINET direct input type with STO sub-function	DeviceNet® direct input type	IO-Link direct input type	IO-Link direct input type with STO sub-function	CC-Link direct input type
Series	JXC51 JXC61	JXCE1	JXCEF	JXC91	JXC9F	JXCP1	JXCPF	JXCD1	JXCL1	JXCLF	JXCM1
Features	Parallel I/O	EtherCAT direct input	EtherCAT direct input with STO sub-function	EtherNet/IP™ direct input	EtherNet/IP™ direct input with STO sub-function	PROFINET direct input	PROFINET direct input with STO sub-function	DeviceNet® direct input	IO-Link direct input	IO-Link direct input with STO sub-function	CC-Link direct input
Compatible motor	Battery-less absolute (Step motor 24 VDC)										
Max. number of step data	64 points										
Power supply voltage	24 VDC										
Reference page	1017	1063									



# LEY-X8 Series

Battery-less Absolute (Step Motor 24 VDC)

Dust-tight/Water-jet-proof (IP65 Equivalent/IP67 Equivalent)

## Specifications

### Step Motor (Servo/24 VDC)

Model				LEY25□E-X8			LEY32□E-X8			LEY40□E-X8		
Actuator specifications	Work load [kg]*1	Horizontal	(3000 [mm/s <sup>2</sup> ])	20	40	60	30	45	60	50	60	80
			(2000 [mm/s <sup>2</sup> ])	30	55	70	40	60	80	60	70	90
		Vertical	(3000 [mm/s <sup>2</sup> ])	7	15	29	10	21	42	12	26	52
	Pushing force [N]*2 *3 *4			63 to 122	126 to 238	232 to 452	80 to 189	156 to 370	296 to 707	132 to 283	266 to 553	562 to 1058
	Speed [mm/s]*4			18 to 400	9 to 200	5 to 100	24 to 400	12 to 200	6 to 100	24 to 400	12 to 230	6 to 110
	Max. acceleration/deceleration [mm/s <sup>2</sup> ]			3000								
	Pushing speed [mm/s]*5			35 or less			30 or less			30 or less		
	Positioning repeatability [mm]			±0.02								
	Lost motion [mm]*6			0.1 or less								
	Screw lead [mm]			12	6	3	16	8	4	16	8	4
Impact/Vibration resistance [m/s <sup>2</sup> ]*7			50/20									
Actuation type			Ball screw (LEY□D)									
Guide type			Sliding bushing (Piston rod)									
Enclosure*8			IP65 equivalent/IP67 equivalent*12									
Operating temperature range [°C]			5 to 40									
Operating humidity range [%RH]			90 or less (No condensation)									
Electric specifications	Motor size			□42			□56.4			□56.4		
	Motor type			Battery-less absolute (Step motor 24 VDC)								
	Encoder			Battery-less absolute								
	Power supply voltage [V]			24 VDC ±10%								
Lock unit specifications	Power [W]*9 *11			Max. power 48			Max. power 104			Max. power 106		
	Type*10			Non-magnetizing lock								
	Holding force [N]			78	157	294	108	216	421	127	265	519
	Power [W]*11			5			5			5		
	Rated voltage [V]			24 VDC ±10%								

\*1 Horizontal: The maximum value of the work load. An external guide is necessary to support the load. (Friction coefficient of guide: 0.1 or less) The actual work load and transfer speed change according to the condition of the external guide. Also, speed changes according to the work load. Check the "Model Selection" on page 883.

Vertical : Speed changes according to the work load. Check the "Model Selection" on page 883.

The values shown in ( ) are the acceleration/deceleration. Set these values to be 3000 [mm/s<sup>2</sup>] or less.

\*2 Pushing force accuracy is ±20% (F.S.).

\*3 The pushing force values for LEY25□E are 30% to 50%, for LEY32□E are 30% to 70%, and for LEY40□E are 35% to 65%.

The pushing force values change according to the duty ratio and pushing speed. Check the "Model Selection" on page 884.

\*4 The speed and force may change depending on the cable length, load, and mounting conditions. Furthermore, if the cable length exceeds 5 m, then it will decrease by up to 10% for each 5 m. (At 15 m: Reduced by up to 20%)

\*5 The allowable speed for pushing operations. When push conveying a workpiece, operate at the vertical work load or less.

\*6 A reference value for correcting errors in reciprocal operation

\*7 Impact resistance : No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

\*8 Cannot be used in an environment where oil such as cutting oil splashes or it is constantly exposed to water

Take appropriate protective measures. For details on enclosure, refer to the "Enclosure" on page 881.

\*9 Indicates the max. power during operation (including the controller)

This value can be used for the selection of the power supply.

\*10 With lock only

\*11 For an actuator with lock, add the power for the lock.

\*12 Excludes the controller body and the connector part on the controller side

## Weight

### Weight: In-line Motor Type

LEY25D									
Stroke	30	50	100	150	200	250	300	350	400
Product weight [kg]	1.48	1.55	1.72	1.97	2.15	2.32	2.50	2.67	2.85

LEY32D											
Stroke	30	50	100	150	200	250	300	350	400	450	500
Product weight [kg]	2.58	2.69	2.98	3.36	3.65	3.94	4.22	4.51	4.80	5.08	5.37

LEY40D											
Stroke	30	50	100	150	200	250	300	350	400	450	500
Product weight [kg]	2.93	3.04	3.33	3.71	4.00	4.29	4.57	4.86	5.15	5.43	5.72

### Additional Weight

[kg]

Size		25	32	40
Lock		0.35	0.65	0.65
Rod end male thread	Male thread	0.03	0.03	0.03
	Nut	0.02	0.02	0.02
Rod flange (including mounting bolt)		0.17	0.20	0.20



# LEY-X8 Series

Battery-less Absolute (Step Motor 24 VDC)

Dust-tight/Water-jet-proof (IP65 Equivalent/IP67 Equivalent)

## Construction

In-line motor type: LEY<sup>25</sup><sub>32</sub><sup>D</sup><sub>40</sub>

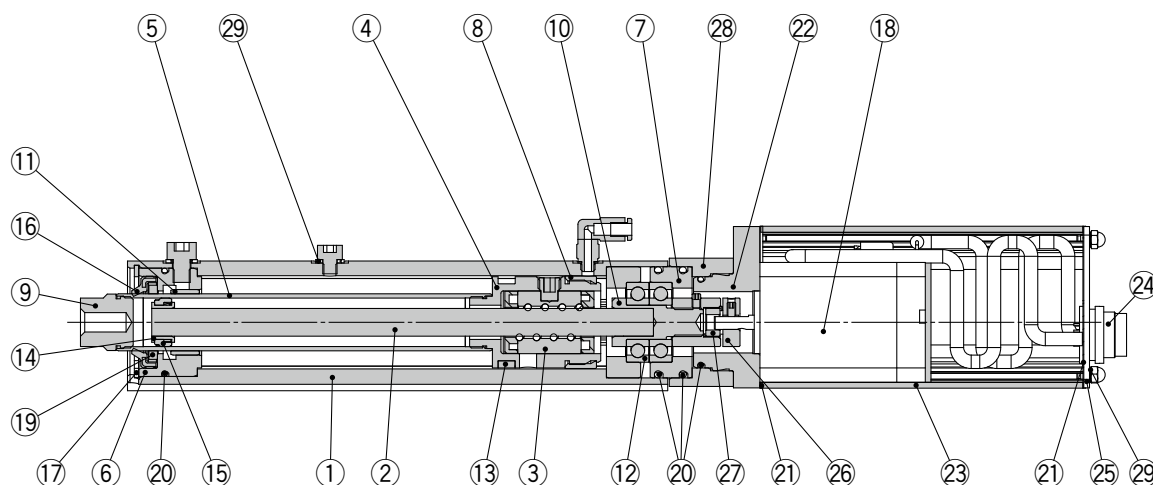

When rod end male thread selected

## Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	Anodized
2	Ball screw shaft	Alloy steel	
3	Ball screw nut	Synthetic resin/Alloy steel	
4	Piston	Aluminum alloy	
5	Piston rod	Stainless steel	Hard chrome plating
6	Rod cover	Aluminum alloy	Anodized
7	Bearing holder	Aluminum alloy	
8	Rotation stopper	Resin	
9	Socket	Stainless steel	
10	Connected shaft	Free cutting carbon steel	Nickel plating
11	Bushing	Bearing alloy	
12	Bearing	—	
13	Magnet	—	
14	Wear ring holder	Stainless steel	Stroke 101 mm or more
15	Wear ring	Resin	Stroke 101 mm or more
16	Greater water resistant scraper	Stainless steel/NBR	

No.	Description	Material	Note
17	Retaining ring	Stainless steel	
18	Motor	—	
19	Lube-retainer	Felt	
20	O-ring	NBR	
21	Gasket	Chloroprene	
22	Motor adapter	Aluminum alloy	LEY25 only
23	Motor cover	Aluminum alloy	Anodized
24	Metal connector	Zinc die-casted	Chrome plating
25	End cover	Aluminum alloy	Anodized
26	Hub	Aluminum alloy	
27	Spider	NBR	
28	Motor block	Aluminum alloy	Anodized
29	Seal washer	Stainless steel/NBR	
30	Socket (Male thread)	Stainless steel	
31	Nut	Stainless steel	


## Replacement Parts/Grease Pack

Applied portion	Order no.
Piston rod	GR-S-010 (10 g) GR-S-020 (20 g)


\* Apply grease on the piston rod periodically.  
Grease should be applied at 1 million cycles or 200 km, whichever comes first.

## Dimensions

### In-line motor type

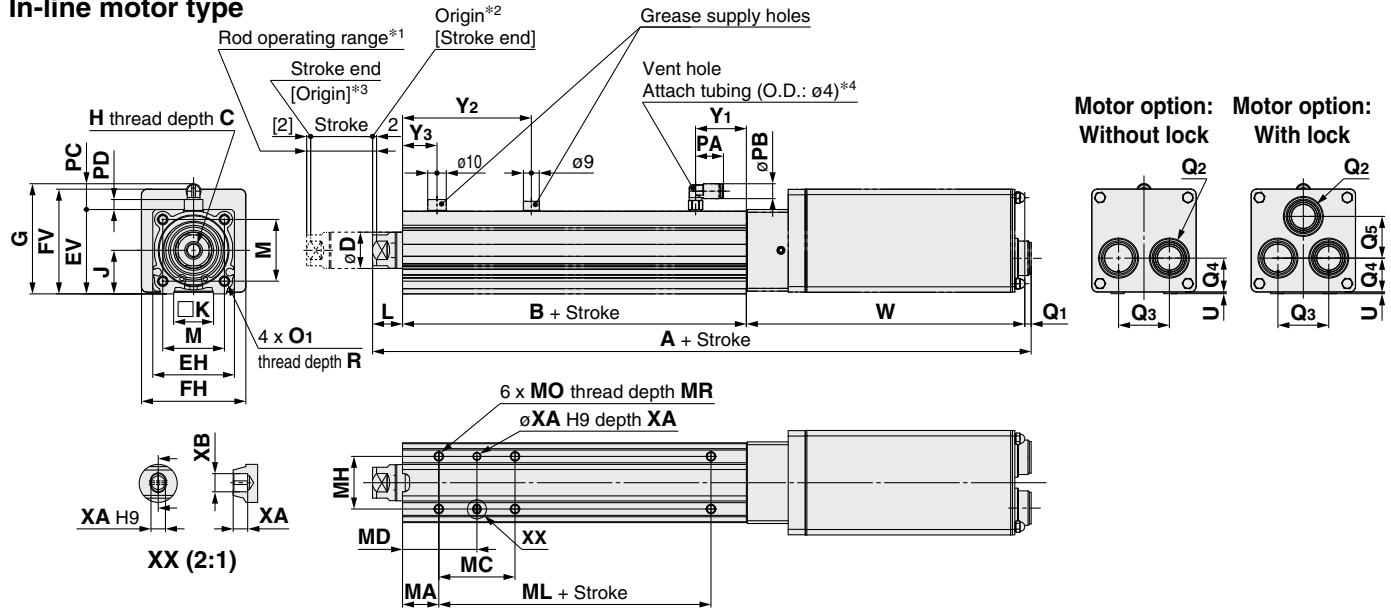

### Rod end male thread: LEY32D□-□□M



Size	B <sub>1</sub>	C <sub>1</sub>	D	H <sub>1</sub>	L <sub>1</sub>	L <sub>2</sub>	MM
25	22	20.5	20	8	38	23.5	M14 x 1.5
32/40	22	20.5	25	8	42	23.5	M14 x 1.5

\* The L<sub>1</sub> measurement is when the unit is in the original position. At this position, 2 mm at the end.

Size	Stroke range [mm]	A		B	C	D	EH	EV	FH	FV	G	H	J	K	L	M	O <sub>1</sub>	R
		Without lock	With lock															
25	30 to 100	262.5	312.5	89.5	13	20	44	45.5	57.6	57.7	61.4	M8 x 1.25	24	17	14.5	34	M5 x 0.8	8
	105 to 400	287.5	337.5	114.5														
32	30 to 100	273	323	96	13	25	51	56.5	69.6	79.6	72.4	M8 x 1.25	31	22	18.5	40	M6 x 1.0	10
	105 to 500	303	353	126														
40	30 to 100	295	355	96	13	25	51	56.5	69.6	79.6	72.4	M8 x 1.25	31	22	18.5	40	M6 x 1.0	10
	105 to 500	325	375	126														

Size	Stroke range [mm]	PA	PB	PC	PD	Q <sub>1</sub>	Q <sub>2</sub>		Q <sub>3</sub>	Q <sub>4</sub>	Q <sub>5</sub>		U	W		Y <sub>1</sub>	Y <sub>2</sub>	Y <sub>3</sub>
							Without lock	With lock			Without lock	With lock		Without lock	With lock			
25	30 to 100	15.4	8.2	15.9	6.5	3.5	2 x Ø22	3 x Ø22	28	18.7	—	23	0.9	155	205	28	71	19
	105 to 400	15.4	8.2	15.9	6.5	3.5	2 x Ø22	3 x Ø22	28	18.7	—	23	0.9	155	205	28	96	
32	30 to 100	15.4	8.2	15.9	7.1	3.5	2 x Ø22	3 x Ø22	36	28	—	32	1	155	205	30	75.5	16
	105 to 500	15.4	8.2	15.9	7.1	3.5	2 x Ø22	3 x Ø22	36	28	—	32	1	155	205	30	105.5	
40	30 to 100	15.4	8.2	15.9	7.1	3.5	2 x Ø22	3 x Ø22	36	28	—	32	1	177	227	30	75.5	16
	105 to 500	15.4	8.2	15.9	7.1	3.5	2 x Ø22	3 x Ø22	36	28	—	32	1	177	227	30	105.5	

### Body Bottom Tapped

Size	Stroke range [mm]	MA	MC	MD	MH	ML	MO	MR	XA	XB
25	30 to 39	20	24	32	29	50	M5 x 0.8	6.5	4	5
	40 to 100		42	41		75				
	101 to 124		59	49.5		75				
	125 to 200		76	58		75				
	201 to 400		76	58		75				
32/40	30 to 39	25	22	36	30	50	M6 x 1	8.5	5	6
	40 to 100		36	43		80				
	101 to 124		53	51.5		80				
	125 to 200		53	51.5		80				
	201 to 500		70	60		80				

\*1 This is the range within which the rod can move when it returns to origin. Make sure that workpieces mounted on the rod do not interfere with other workpieces or the facilities around the rod.

\*2 Position after returning to origin

\*3 [ ] for when the direction of return to origin has changed

\*4 The vent hole is the port for releasing to atmosphere. Do not apply pressure to this hole.

Attach tubing to the vent hole and place the end of the tubing so it is not exposed to dust or water.

\* The direction of rod end width across flats (□K) differs depending on the products.

For the mounting bracket dimensions, refer to the **Web Catalog**.

# LEY-X8 Series

Battery-less Absolute (Step Motor 24 VDC)

Dust-tight/Water-jet-proof (IP65 Equivalent/IP67 Equivalent)

## Option: Actuator Cable


[Metal connector robotic cable for battery-less absolute (Step motor 24 VDC)]

### LE-CE-1-X4

Cable length (L) [m]

1	1.5
3	3
5	5
8	8*1
A	10*1
B	15*1
C	20*1

\*1 Produced upon receipt of order

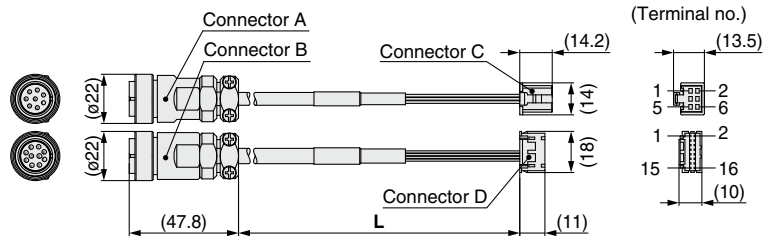

### Weight

Product no.	Weight [g]	Note
LE-CE-1-X4	270	Robotic cable
LE-CE-3-X4	440	
LE-CE-5-X4	650	
LE-CE-8-X4	980	
LE-CE-A-X4	1200	
LE-CE-B-X4	1760	
LE-CE-C-X4	2290	

Signal	Connector A terminal no.	Cable color	Connector C terminal no.
$\bar{A}$	1	Red	1
A	2	Brown	2
COM-A	3	Green	3
COM-B	4	Blue	4
$\bar{B}$	5	Yellow	5
B	6	Orange	6
Signal	Connector B terminal no.	Cable color	Connector D terminal no.
Vcc	1	Brown	12
GND	2	Black (Brown)	13
SD+ (RX)	3	Yellow	11
SD- (TX)	4	Black (Yellow)	10
A	5	Black (Red)	6
$\bar{A}$	6	Red	7
B	7	Black (Orange)	8
$\bar{B}$	8	Orange	9
Shield	9	Black	3

[Metal connector robotic cable with lock for battery-less absolute (Step motor 24 VDC)]


### LE-CE-1-B-X4

Cable length (L) [m]

1	1.5
3	3
5	5
8	8*2
A	10*2
B	15*2
C	20*2

\*2 Produced upon receipt of order

With lock and sensor

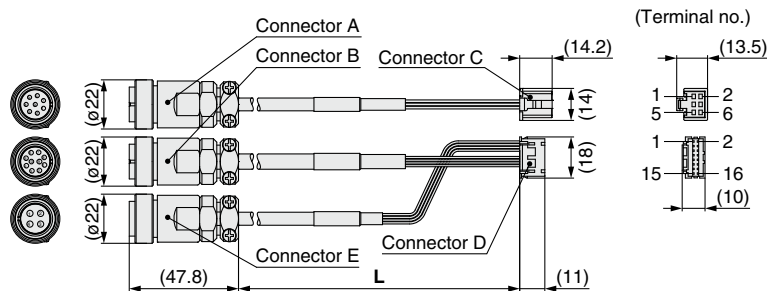

### Weight

Product no.	Weight [g]	Note
LE-CE-1-B-X4	320	Robotic cable
LE-CE-3-B-X4	490	
LE-CE-5-B-X4	700	
LE-CE-8-B-X4	1030	
LE-CE-A-B-X4	1250	
LE-CE-B-B-X4	1810	
LE-CE-C-B-X4	2340	


Signal	Connector A terminal no.	Cable color	Connector C terminal no.
$\bar{A}$	1	Red	1
A	2	Brown	2
COM-A	3	Green	3
COM-B	4	Blue	4
$\bar{B}$	5	Yellow	5
B	6	Orange	6
Signal	Connector B terminal no.	Cable color	Connector D terminal no.
Vcc	1	Brown	12
GND	2	Black (Brown)	13
SD+ (RX)	3	Yellow	11
SD- (TX)	4	Black (Yellow)	10
A	5	Black (Red)	6
$\bar{A}$	6	Red	7
B	7	Black (Orange)	8
$\bar{B}$	8	Orange	9
Shield	9	Black	3
Signal	Connector E terminal no.	Cable color	Connector E terminal no.
Lock (+)	4	Red	4
Lock (-)	3	Black	5
Sensor (+)	1	Brown	1
Sensor (-)	2	Blue	2



# LEY-X8 Series Auto Switch Mounting

## Auto Switch Proper Mounting Position

Applicable auto switch: D-M9□A(V)

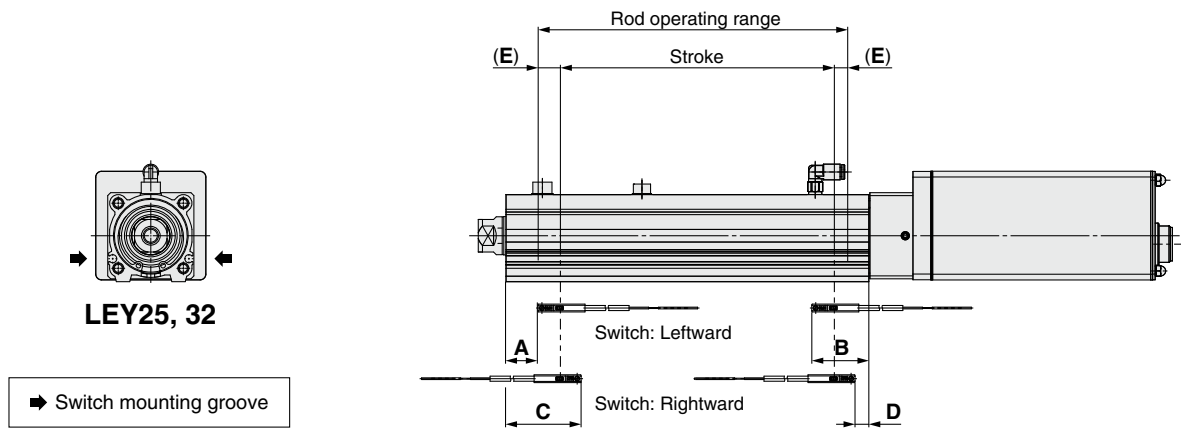


								[mm]
Size	Stroke range	Auto switch position				Return to origin distance	Operating range	
		Leftward mounting		Rightward mounting				
		A	B	C	D			
25	15 to 100	27	62.5	39	50.5	(2)	4.2	
	105 to 400	52		64				
32/40	20 to 100	30.5	85.5	42.5	53.5	(2)	4.9	
	105 to 500	90.5		102.5				

\* The values in the table above are to be used as a reference when mounting auto switches for stroke end detection. Adjust the auto switch after confirming the operating conditions in the actual setting.

\* Since the operating range is provided as a guideline including hysteresis, it cannot be guaranteed (assuming approx.  $\pm 30\%$  dispersion). It may change substantially depending on the ambient environment.

## Auto Switch Mounting

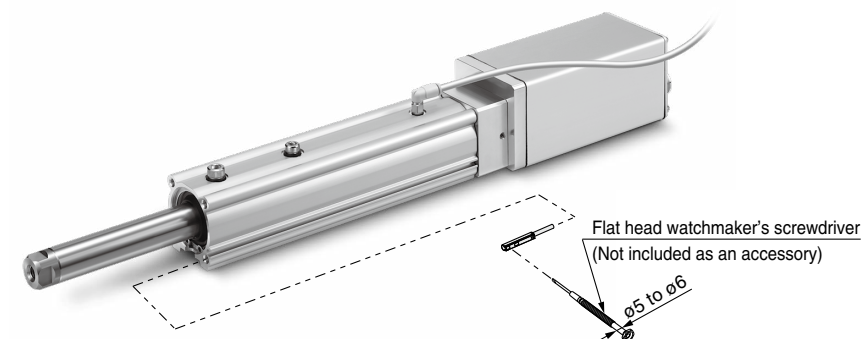

### Tightening Torque for Auto Switch Mounting Screw [N·m]

Auto switch model	Tightening torque
D-M9□A(V)	0.05 to 0.10


\* When tightening the auto switch mounting screw (included with the auto switch), use a watchmaker's screwdriver with a handle diameter of 5 to 6 mm.

# Water Resistant 2-Color Indicator Solid State Auto Switch: Direct Mounting Type D-M9NA(V)/D-M9PA(V)/D-M9BA(V)



## Grommet

- Water (coolant) resistant type
- 2-wire load current is reduced (2.5 to 40 mA).
- The proper operating range can be determined by the color of the light. (Red → Green ← Red)
- Using flexible cable as standard spec.

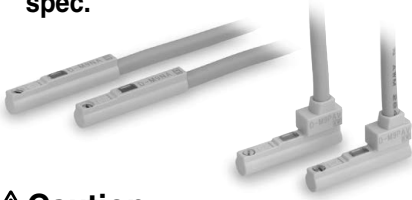

## Caution

### Precautions

Fix the auto switch with the existing screw installed on the auto switch body. The auto switch may be damaged if a screw other than the one supplied is used.  
Please contact SMC if using coolant liquid other than water based solution.

## Weight


[g]

Auto switch model	D-M9NA(V)	D-M9PA(V)	D-M9BA(V)
Lead wire length			
0.5 m (Nil)	8	7	
1 m (M)	14	13	
3 m (L)	41	38	
5 m (Z)	68	63	


## Dimensions

[mm]

### D-M9□A

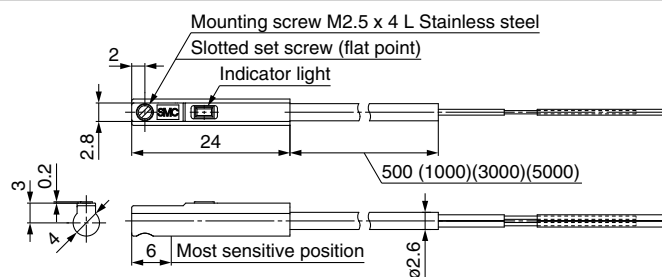

### D-M9□AV

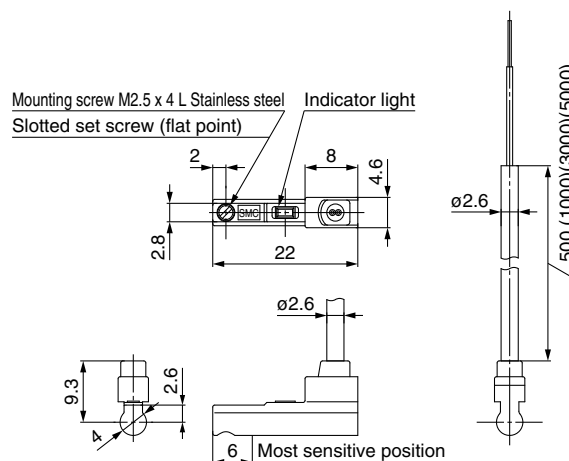

## Auto Switch Specifications

PLC: Programmable Logic Controller

D-M9□A, D-M9□AV (With indicator light)						
Auto switch model	D-M9NA	D-M9NAV	D-M9PA	D-M9PAV	D-M9BA	D-M9BAV
Electrical entry direction	In-line	Perpendicular	In-line	Perpendicular	In-line	Perpendicular
Wiring type	3-wire				2-wire	
Output type	NPN		PNP		—	
Applicable load	IC circuit, Relay, PLC				24 VDC relay, PLC	
Power supply voltage	5, 12, 24 VDC (4.5 to 28 V)				—	
Current consumption	10 mA or less				—	
Load voltage	28 VDC or less		—		24 VDC (10 to 28 VDC)	
Load current	40 mA or less				2.5 to 40 mA	
Internal voltage drop	0.8 V or less at 10 mA (2 V or less at 40 mA)				4 V or less	
Leakage current	100 μA or less at 24 VDC				0.8 mA or less	
Indicator light	Operating range ..... Red LED illuminates. Proper operating range ..... Green LED illuminates.					
Standard	CE/UKCA marking					

## Oilproof Flexible Heavy-duty Lead Wire Specifications

Auto switch model		D-M9NA□	D-M9NAV□	D-M9PA□	D-M9PAV□	D-M9BA□	D-M9BAV□
Sheath	Outside diameter [mm]	ø2.6					
Insulator	Number of cores	3 cores (Brown/Blue/Black)				2 cores (Brown/Blue)	
	Outside diameter [mm]	ø0.88					
Conductor	Effective area [mm²]	0.15					
	Strand diameter [mm]	ø0.05					
Min. bending radius [mm]		17					

\* Refer to page 1363 for solid state auto switch common specifications.


\* Refer to page 1363 for lead wire lengths.

## LEY-X7 Series Size 25, 32, 40

Incremental (Step Motor 24 VDC)

Incremental ((Servo Motor 24 VDC)


p. 903

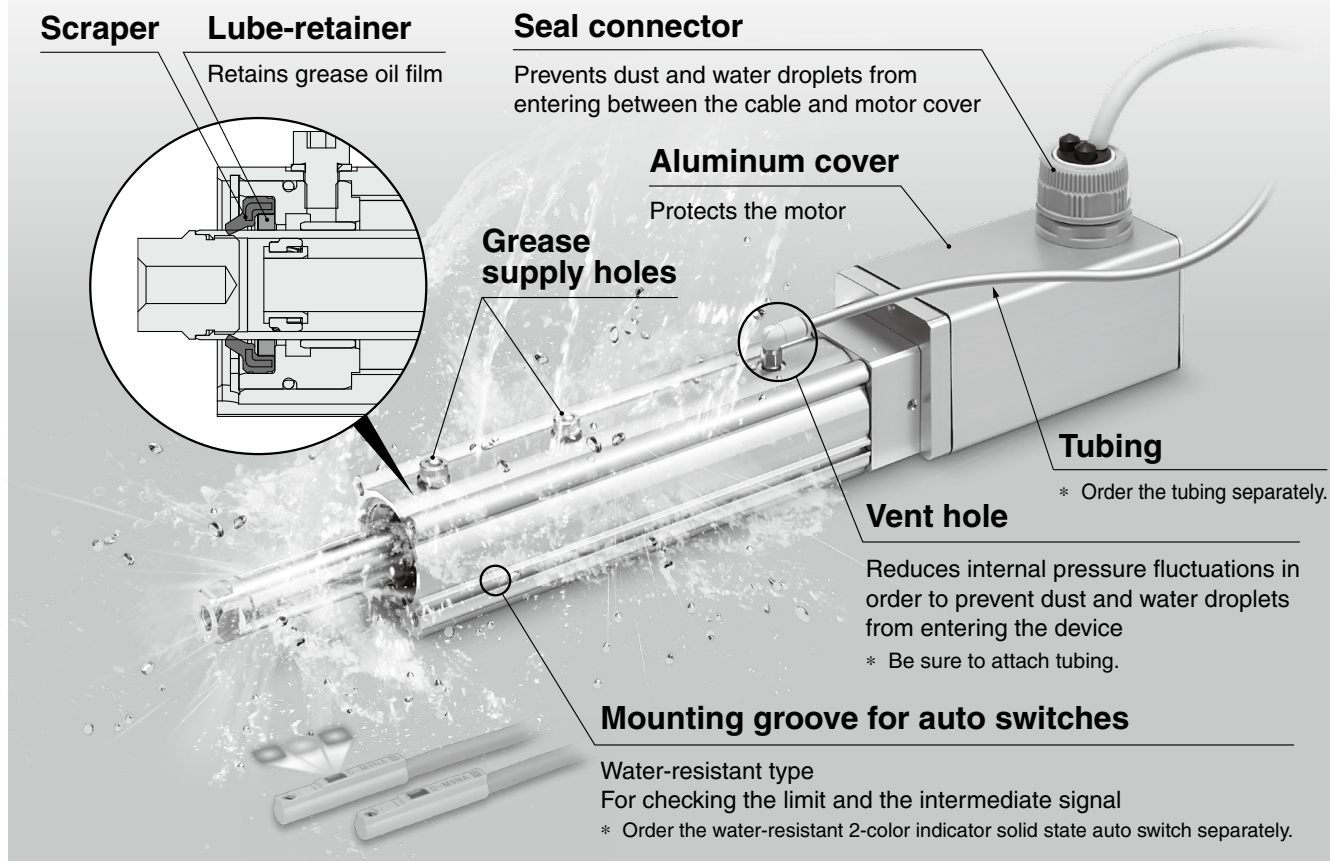

**Max. stroke: 500 mm**\*1


\*1 For sizes 32 and 40

### Application Examples

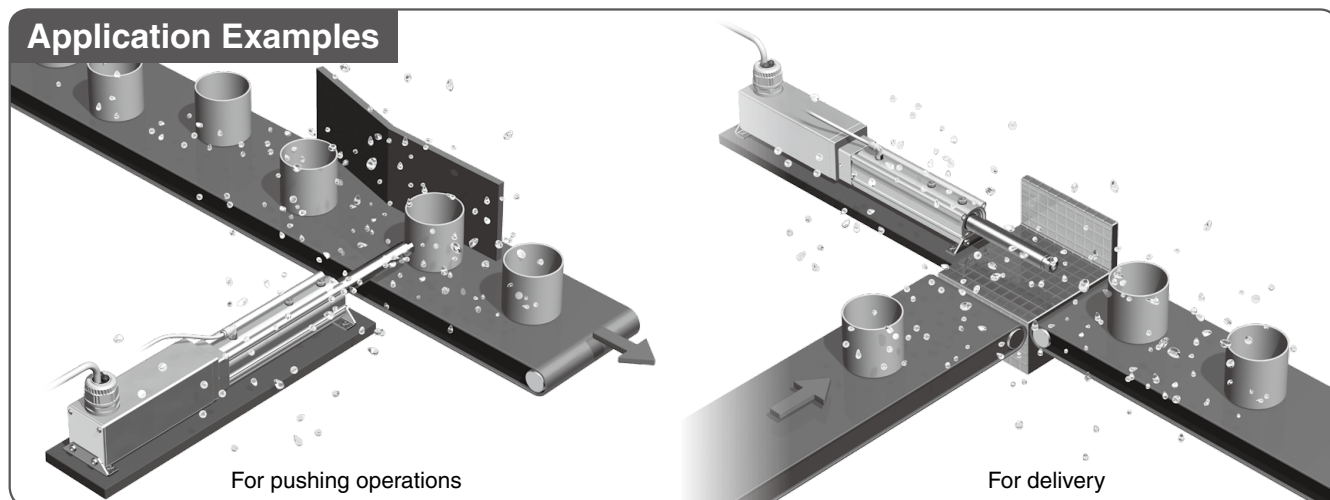

# Model Selection

LEY-X7 Series ▶ p. 903



Refer to page 898 for the LECPA, JXC $\square_3^2$  and page 899 for the LECA6.


## Speed-Work Load Graph (Guide)

### For Step Motor (Servo/24 VDC) JXC $\square_1$ , LECP1

#### Horizontal


##### LEY25 $\square$ -X7

▨ for acceleration/deceleration: 2000 mm/s<sup>2</sup>

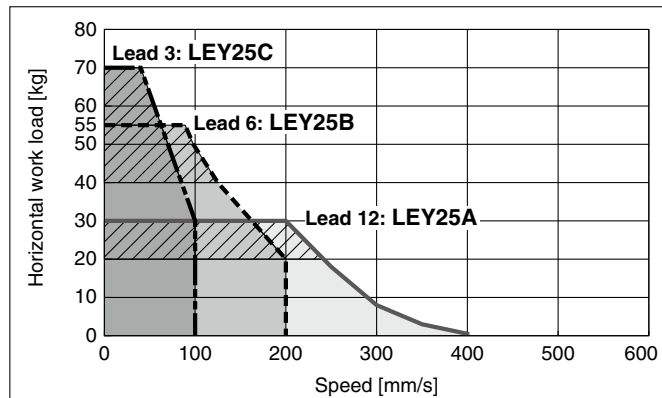


##### LEY32 $\square$ -X7

▨ for acceleration/deceleration: 2000 mm/s<sup>2</sup>

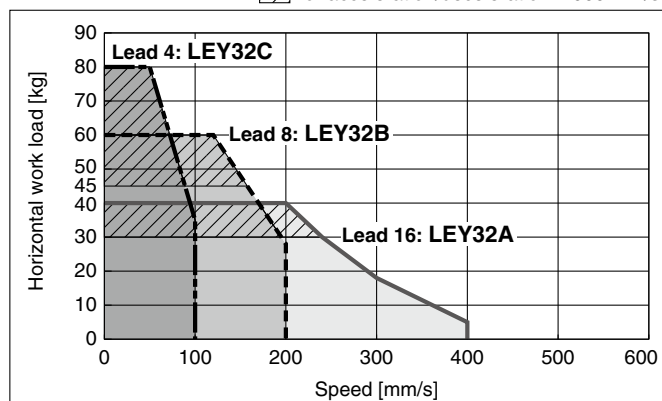


##### LEY40 $\square$ -X7

▨ for acceleration/deceleration: 2000 mm/s<sup>2</sup>

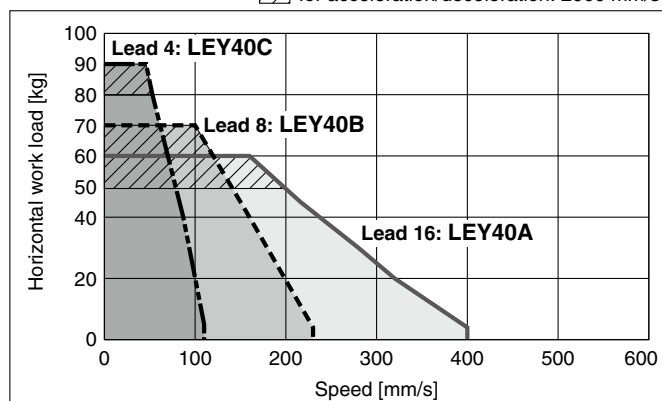


#### Vertical


##### LEY25 $\square$ -X7

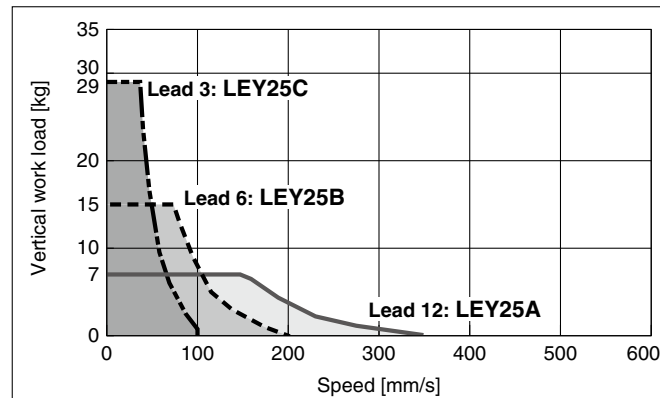

##### LEY32 $\square$ -X7

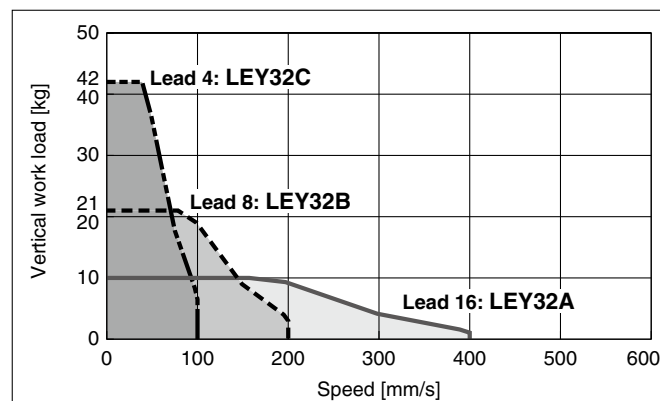

##### LEY40 $\square$ -X7

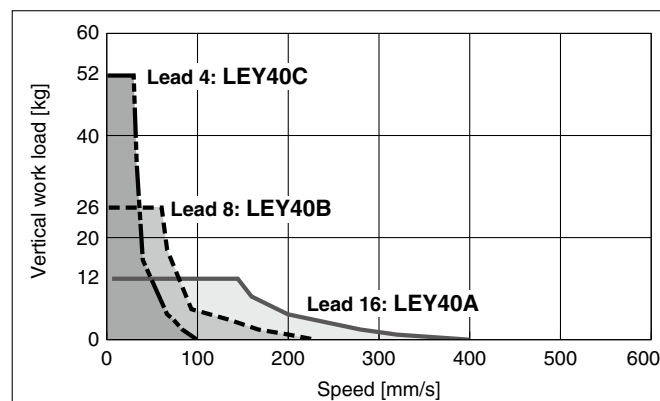


Refer to page 897 for the JXC□1, LECP1 and page 899 for the LECA6.

## Speed-Work Load Graph (Guide) For Step Motor (Servo/24 VDC) LECPA, JXC□<sub>2</sub><sub>3</sub>

### Horizontal


#### LEY25□-X7

▨ for acceleration/deceleration: 2000 mm/s<sup>2</sup>

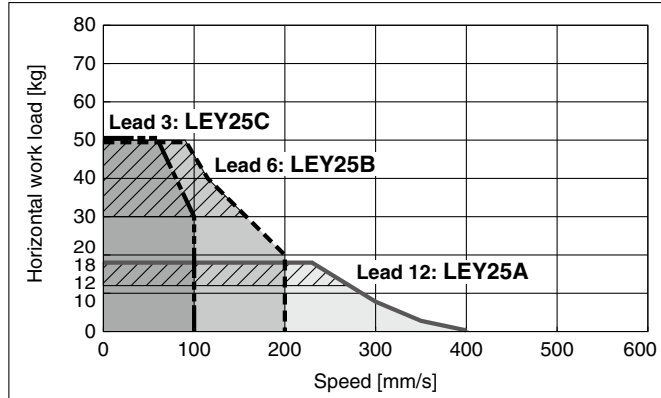


#### LEY32□-X7

▨ for acceleration/deceleration: 2000 mm/s<sup>2</sup>

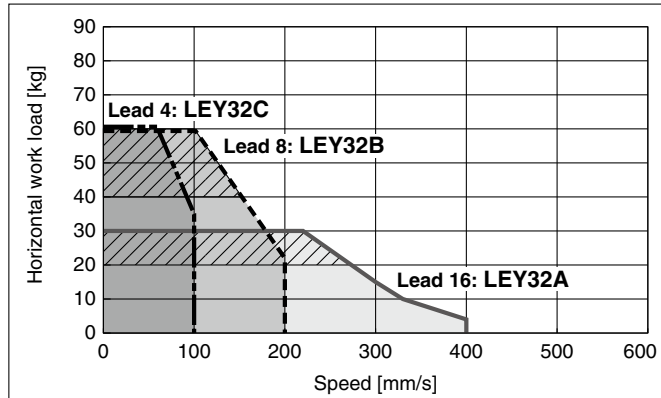


#### LEY40□-X7

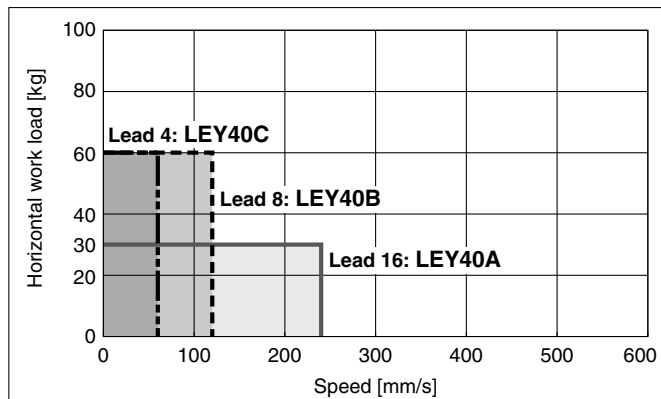


### Vertical


#### LEY25□-X7

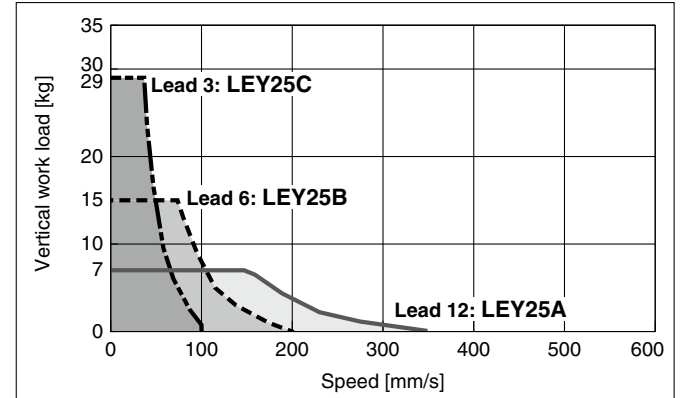

#### LEY32□-X7

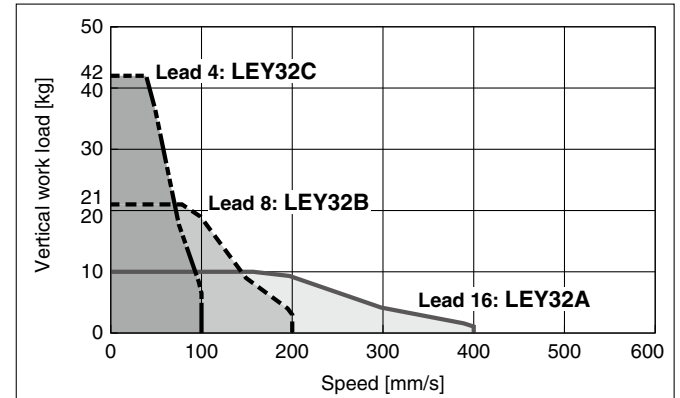

#### LEY40□-X7

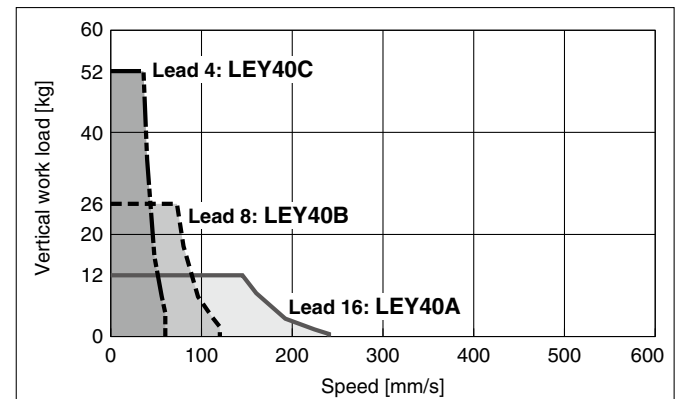



# LEY-X7 Series


Incremental (Step Motor 24 VDC)    Incremental (Servo Motor 24 VDC)    Dust-tight/Water-jet-proof (IP65 Equivalent/IP67 Equivalent)

## Speed-Work Load Graph (Guide) For Servo Motor (24 VDC) LECA6

Refer to page 897 for the JXC□1, LECP1  
and page 898 for the LECPA, JXC□<sub>2</sub><sup>2</sup>/<sub>3</sub>.


### Horizontal

#### LEY25□A-X7

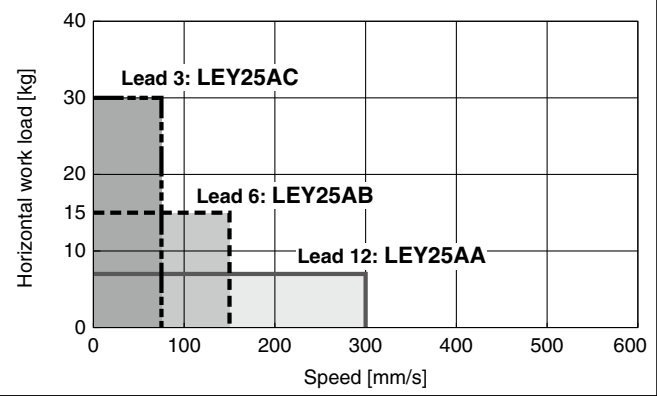

### Vertical


#### LEY25□A-X7

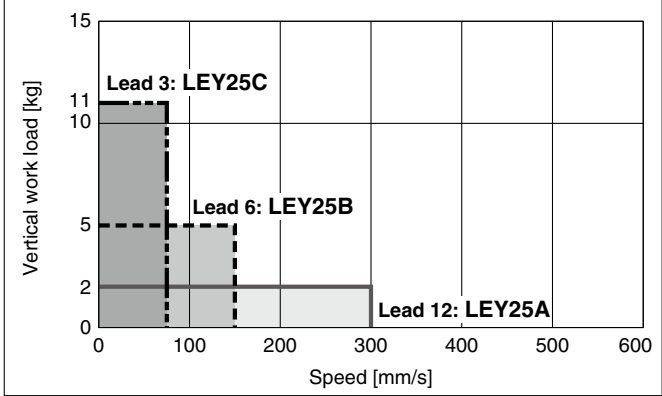

## Force Conversion Graph


### Step Motor (Servo/24 VDC)

#### LEY25□-X7

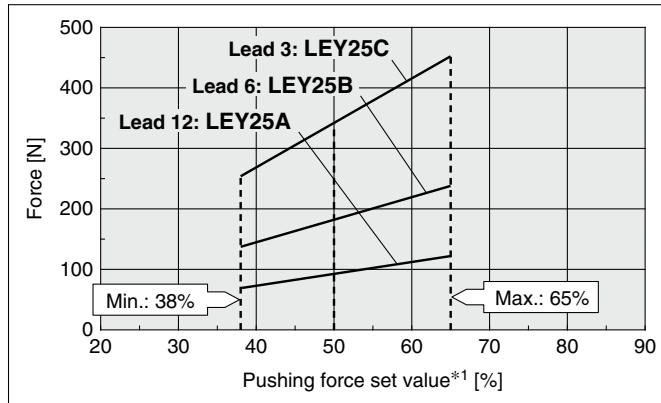


Ambient temperature	Pushing force set value*1 [%]	Duty ratio [%]	Continuous pushing time [min]
40°C or less	65 or less	100	No restriction

#### LEY32□-X7

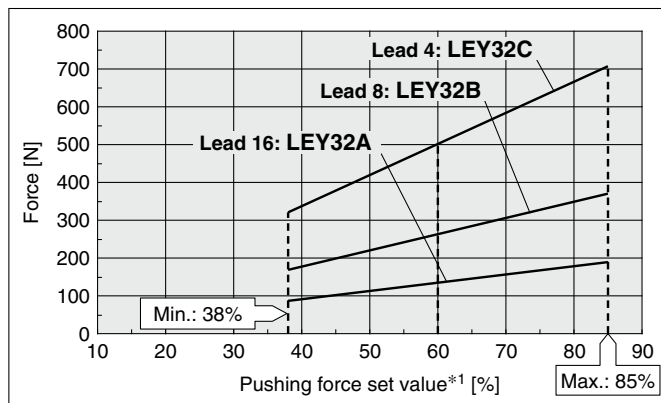

Ambient temperature	Pushing force set value*1 [%]	Duty ratio [%]	Continuous pushing time [min]
25°C or less	85 or less	100	No restriction
40°C	65 or less	100	No restriction
	85	50	15 or less


#### LEY40□-X7

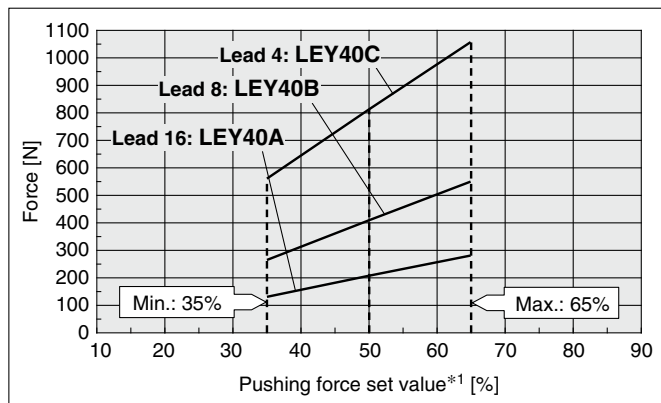

Ambient temperature	Pushing force set value*1 [%]	Duty ratio [%]	Continuous pushing time [min]
40°C or less	65 or less	100	No restriction

### Servo Motor (24 VDC)

#### LEY25□A-X7

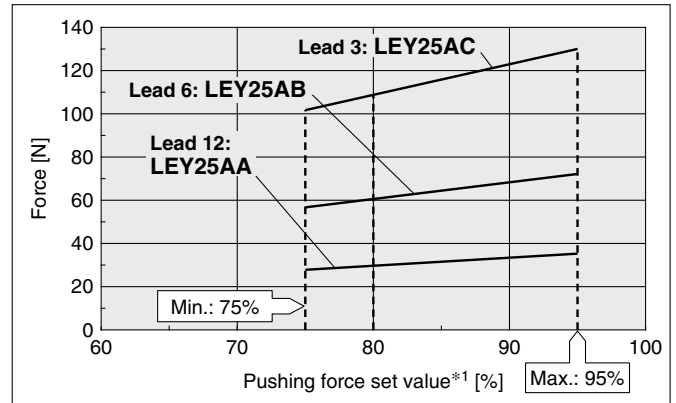

Ambient temperature	Pushing force set value*1 [%]	Duty ratio [%]	Continuous pushing time [min]
40°C or less	95 or less	100	No restriction

### <Limit Values for Pushing Force and Trigger Level in Relation to Pushing Speed> Without Load

Model	Lead	Pushing speed [mm/s]	Pushing force (Setting input value)	Model	Lead	Pushing speed [mm/s]	Pushing force (Setting input value)
LEY25	A/B/C	21 to 35	50 to 65%	LEY25□A	A/B/C	21 to 35	80 to 95%
LEY32	A	24 to 30	60 to 85%				
	B/C	21 to 30	60 to 85%				
LEY40	A	24 to 30	50 to 65%				
	B/C	21 to 30	50 to 65%				

There is a limit to the pushing force in relation to the pushing speed. If the product is operated outside of the range (low pushing force), the completion signal [INP] may be output before the pushing operation has been completed (during the moving operation). If operating with the pushing speed below the min. speed, please check for operating problems before using the product.

### <Set Values for Vertical Upward Transfer Pushing Operations>

For vertical loads (upward), set the pushing force to the max. value shown below and operate at the work load or less.

Model	LEY25□	LEY32□	LEY40□	LEY25□A
Lead	A B C	A B C	A B C	A B C
Work load [kg]	2.5 5 10	4.5 9 18	7 14 28	1.2 2.5 5
Pushing force	65%	85%	65%	95%

\*1 Set values for the controller


# LEY-X7 Series

Incremental (Step Motor 24 VDC)


Incremental (Servo Motor 24 VDC)

Dust-tight/Water-jet-proof (IP65 Equivalent/IP67 Equivalent)

## Graph of Allowable Lateral Load on the Rod End (Guide)

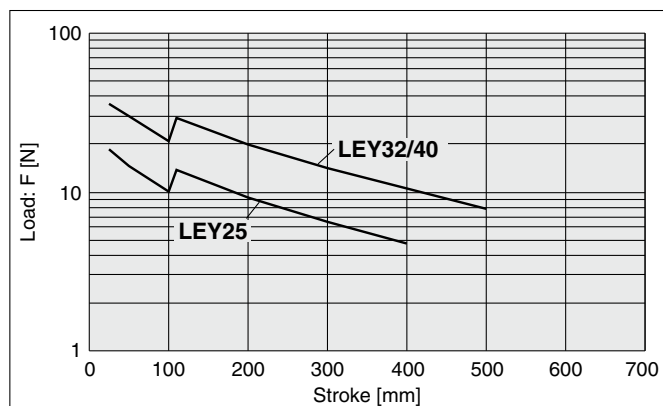

[Stroke] = [Product stroke] + [Distance from the rod end to the center of gravity of the workpiece]

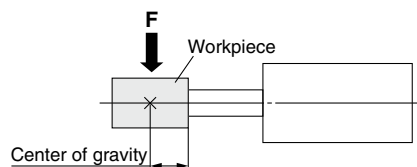


\* The changes in the graph waveforms are due to the difference in components of different product strokes.


## Rod Displacement: $\delta$ [mm]

Stroke Size	30	50	100	150	200	250	300	350	400	450	500
25	±0.3	±0.4	±0.7	±0.7	±0.9	±1.1	±1.3	±1.5	±1.7	—	—
32/40	±0.3	±0.4	±0.7	±0.6	±0.8	±1.0	±1.1	±1.3	±1.5	±1.7	±1.8

\* The values without a load are shown.



## Non-rotating Accuracy of Rod



Size	Non-rotating accuracy $\theta$
25	±0.8°
32/40	±0.7°

\* Avoid using the electric actuator in such a way that rotational torque would be applied to the piston rod.

This may cause the deformation of the non-rotating guide, abnormal auto switch responses, play in the internal guide, or an increase in the sliding resistance.



### Incremental (Servo Motor 24 VDC)

## Rod Type

**Dust-tight/Water-jet-proof (IP65 Equivalent/IP67 Equivalent)**




\* For details, refer to page 1343 and onward

## LEY-X7 (Made to Order) Series LEY25, 32, 40

**RoHS**

**Refer to pages 897 to 901 for model selection.**

## How to Order



**LEY** **25** **D** **B** - **50** **R1**

1 2 3 4 5 6 7 8 9

**JXC** ☐ Series

**CD17T**

**LEC** ☐ Series

**AN**

**10** **1** ☐

**10** **11** **12**

For details on controllers, refer to page 905.

- **Made to order:**  
**Dust-tight/  
Water-jet-proof**

### 1 Size

25  
32/40

## 2 Motor mounting position

D	In-line
---	---------

### 3 Motor type

Symbol	Type	Size		Compatible controllers/ drivers	
		25	32/40		
<b>Nil</b>	Step motor (Servo/24 VDC)	●	●	JXC51 JXC61 JXCE1 JXC91 JXCP1 JXCD1 JXCL1 JXCM1	JXCEF JXC9F JXCPF JXCLF  LECP1 LECPA
<b>A</b>	Servo motor (24 VDC)	●	—	LECA6	

**4 Lead [mm]**

Symbol	LEY25	LEY32/40
<b>A</b>	12	16
<b>B</b>	6	8
<b>C</b>	3	4

**5 Stroke [mm]**

<b>30</b>	30
<b>to</b>	to
<b>500</b>	500

\* For details, refer to the applicable stroke table below.

## 6 Motor option

<b>Nil</b>	Without option
<b>B</b>	With lock

### 7 Rod end thread

<b>Nil</b>	Rod end female thread
<b>M</b>	Rod end male thread (1 rod end nut is included.)

## 8 Mounting\*2

Symbol	Type	Motor mounting position
		In-line
<b>Nil</b>	Ends tapped/ Body bottom tapped*3	●
<b>F</b>	Rod flange*3	●

### ⑨ Actuator cable type/length

Robotic cable		[m]	
<b>R1</b>	1.5	<b>RA</b>	$10^{*5}$
<b>R3</b>	3	<b>RB</b>	$15^{*5}$
<b>R5</b>	5	<b>RC</b>	$20^{*5}$
<b>R8</b>	$8^{*5}$		

### Applicable Stroke Table\*1

[illegible]

●: Standard

\* For auto switches, refer to pages 910 and 911.

\* “-X7” is not added to an actuator model with a controller/driver part number suffix.  
Example) “LEY25DB-100” for the LEY25DB-100BM-R1AN1-X7

## JXC Series (For details, refer to page 905.)

### 10 Controller

Nil	Without controller
C□1□□	With controller

**C D 1 7 T**

#### Interface (Communication protocol/Input/Output)

Symbol	Type	Number of axes, Special specification	Standard	With STO sub-function
5	Parallel input (NPN)	●	●	
6	Parallel input (PNP)	●	●	
E	EtherCAT	●	●	●
9	EtherNet/IP™	●	●	●
P	PROFINET	●	●	●
D	DeviceNet®	●	●	●
L	IO-Link	●	●	●
M	CC-Link	●	●	●

#### Mounting

7	Screw mounting
8*10	DIN rail

#### Number of axes, Special specification

Symbol	Number of axes	Specification
1	Single axis	Standard
F	Single axis	With STO sub-function

#### Communication plug connector, I/O cable\*11

Symbol	Type	Applicable interface
Nil	Without accessory	—
S	Straight type communication plug connector	DeviceNet®
T	T-branch type communication plug connector	CC-Link Ver. 1.10
1	I/O cable (1.5 m)	Parallel input (NPN) Parallel input (PNP)
3	I/O cable (3 m)	
5	I/O cable (5 m)	

## LEC Series (For details, refer to page 905.)

**AN 1**

### 10 Controller/Driver type\*6

Nil	Without controller/driver	
6N	<b>LECA6</b>	NPN
6P	(Step data input type)	PNP
1N	<b>LECP1</b>	NPN
1P	(Programless type)	PNP
AN	<b>LECPA*7</b>	NPN
AP	(Pulse input type)	PNP

### 11 I/O cable length\*8, Communication plug

Nil	Without cable
1	1.5 m
3	3 m*9
5	5 m*9

### 12 Controller/Driver mounting

Nil	Screw mounting
D	DIN rail*10

- \*1 Please contact SMC for non-standard strokes as they are produced as special orders.
- \*2 The mounting bracket is shipped together with the product but does not come assembled.
- \*3 For the horizontal cantilever mounting of the rod flange or ends tapped types, use the actuator within the following stroke range.  
· LEY25: 200 mm or less · LEY32/40: 100 mm or less
- \*4 The head flange type is not available for the LEY32/40.
- \*5 Produced upon receipt of order (Robotic cable only)
- \*6 For details on controllers/drivers and compatible motors, refer to the compatible controllers/drivers on the next page.
- \*7 When pulse signals are open collector, order the current limiting resistor (LEC-PA-R-□) separately after referring to page 1062.

- \*8 When "Without controller/driver" is selected for controller/driver types, I/O cable cannot be selected. If an I/O cable is required, refer to the cable for the LECA6 ([Web Catalog](#)), LECP1 ([Web Catalog](#)), or LECPA ([Web Catalog](#)).
- \*9 When "Pulse input type" is selected for controller/driver types, pulse input usable only with differential. Only 1.5 m cables usable with open collector
- \*10 The DIN rail is not included. It must be ordered separately.
- \*11 Select "Nil" for anything other than DeviceNet®, CC-Link, or parallel input.  
Select "Nil," "S," or "T" for DeviceNet® or CC-Link.  
Select "Nil," "1," "3," or "5" for parallel input.

## ⚠ Caution

### [CE/UKCA-compliant products]



- EMC compliance was tested by combining the electric actuator LEY series and the controller LEC/JXC series.  
The EMC depends on the configuration of the customer's control panel and the relationship with other electrical equipment and wiring. Therefore, compliance with the EMC directive cannot be certified for SMC components incorporated into the customer's equipment under actual operating conditions. As a result, it is necessary for the customer to verify compliance with the EMC directive for the machinery and equipment as a whole.
- For the incremental (servo motor 24 VDC) specification, EMC compliance was tested by installing a noise filter set (LEC-NFA). Refer to page 1037 for the noise filter set. Refer to the LECA series Operation Manual for installation.

## The actuator and controller/driver are sold as a package.

Confirm that the combination of the controller/driver and actuator is correct.

### <Check the following before use.>

- Check the actuator label for the model number. This number should match that of the controller/driver.
- Check that the Parallel I/O configuration matches (NPN or PNP).



\* Refer to the Operation Manual for using the products.  
Please download it via our website: <https://www.smcworld.com>





# LEY-X7 Series











Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

Dust-tight/Water-jet-proof (IP65 Equivalent/IP67 Equivalent)

## Compatible Controllers/Drivers

Type	Step data input type	Step data input type	Programless type	Pulse input type
				
Series	<b>JXC51 JXC61</b>	<b>LECA6</b>	<b>LECP1</b>	<b>LECPA</b>
Features	Parallel I/O	Parallel I/O	Capable of setting up operation (step data) without using a PC or teaching box	Operation by pulse signals
Compatible motor	Step motor (Servo/24 VDC)	Servo motor (24 VDC)	Step motor (Servo/24 VDC)	
Max. number of step data	64 points		14 points	—
Power supply voltage	24 VDC			
Reference page	1017	1031	1042	1057

Type	EtherCAT direct input type	EtherCAT direct input type with STO sub-function	EtherNet/IP™ direct input type	EtherNet/IP™ direct input type with STO sub-function	PROFINET direct input type	PROFINET direct input type with STO sub-function	DeviceNet® direct input type	IO-Link direct input type	IO-Link direct input type with STO sub-function	CC-Link direct input type
										
Series	<b>JXCE1</b>	<b>JXCEF</b>	<b>JXC91</b>	<b>JXC9F</b>	<b>JXCP1</b>	<b>JXCPF</b>	<b>JXCD1</b>	<b>JXCL1</b>	<b>JXCLF</b>	<b>JXCM1</b>
Features	EtherCAT direct input	EtherCAT direct input with STO sub-function	EtherNet/IP™ direct input	EtherNet/IP™ direct input with STO sub-function	PROFINET direct input	PROFINET direct input with STO sub-function	DeviceNet® direct input	IO-Link direct input	IO-Link direct input with STO sub-function	CC-Link direct input
Compatible motor	Step motor (Servo/24 VDC)									
Max. number of step data	64 points									
Power supply voltage	24 VDC									
Reference page	1063									



## Specifications

### Step Motor (Servo/24 VDC)

Model				LEY25□-X7			LEY32□-X7			LEY40□-X7			
Actuator specifications	Work load*1 [kg]	Horizontal	For JXC□1, JXC□F, LECP1	(3000 [mm/s <sup>2</sup> ])	20	40	60	30	45	60	50	60	80
				(2000 [mm/s <sup>2</sup> ])	30	55	70	40	60	80	60	70	90
			For LECPA JXC□ <sup>2</sup>	(3000 [mm/s <sup>2</sup> ])	12	30	30	20	40	40	30	60	60
				(2000 [mm/s <sup>2</sup> ])	18	50	50	30	60	60	—	—	—
		Vertical	(3000 [mm/s <sup>2</sup> ])	7	15	29	10	21	42	12	26	52	
	Pushing force [N]*2 *3 *4				63 to 122	126 to 238	232 to 452	80 to 189	156 to 370	296 to 707	132 to 283	266 to 553	562 to 1058
	Speed [mm/s]*4				18 to 400	9 to 200	5 to 100	24 to 400	12 to 200	6 to 100	24 to 400	12 to 230	6 to 110
	Max. acceleration/deceleration [mm/s <sup>2</sup> ]				3000								
	Pushing speed [mm/s]*5				35 or less			30 or less			30 or less		
	Positioning repeatability [mm]				±0.02								
Lost motion [mm]*6				0.1 or less									
Screw lead [mm]				12	6	3	16	8	4	16	8	4	
Impact/Vibration resistance [m/s <sup>2</sup> ]*7				50/20									
Actuation type				Ball screw (LEY□D)									
Guide type				Sliding bushing (Piston rod)									
Enclosure*8				IP65 equivalent/IP67 equivalent									
Operating temperature range [°C]				5 to 40									
Operating humidity range [%RH]				90 or less (No condensation)									
Electric specifications	Motor size				□42			□56.4			□56.4		
	Motor type				Step motor (Servo/24 VDC)								
	Encoder				Incremental								
	Power supply voltage [V]				24 VDC ±10%								
	Power [W]*9 *11				Max. power 48			Max. power 104			Max. power 106		
Lock unit specifications	Type*10				Non-magnetizing lock								
	Holding force [N]				78	157	294	108	216	421	127	265	519
	Power [W]*11				5			5			5		
	Rated voltage [V]				24 VDC ±10%								

\*1 Horizontal: The max. value of the work load. An external guide is necessary to support the load. (Friction coefficient of guide: 0.1 or less) The actual work load and transfer speed change according to the condition of the external guide. Also, speed changes according to the work load. Check the "Model Selection" on pages 897 and 898.

Vertical: Speed changes according to the work load. Check the "Model Selection" on pages 897 and 898.

The values shown in ( ) are the acceleration/deceleration. Set these values to be 3000 [mm/s<sup>2</sup>] or less.

\*2 Pushing force accuracy is ±20% (F.S.).

\*3 The thrust setting values for LEY25□ are 38% to 65%, for LEY32□ are 38% to 85%, and for LEY40□ are 35% to 65%. The pushing force values change according to the duty ratio and pushing speed. Check the "Model Selection" on page 900.

\*4 The speed and force may change depending on the cable length, load, and mounting conditions. Furthermore, if the cable length exceeds 5 m, then it will decrease by up to 10% for each 5 m. (At 15 m: Reduced by up to 20%)

\*5 The allowable speed for pushing operation. When push conveying a workpiece, operate at the vertical work load or less.

\*6 A reference value for correcting errors in reciprocal operation

\*7 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

\*8 Cannot be used in an environment where oil such as cutting oil splashes or it is constantly exposed to water

Take appropriate protective measures. For details on enclosure, refer to the "Enclosure" on page 881.

\*9 Indicates the max. power during operation (including the controller). This value can be used for the selection of the power supply.

\*10 With lock only

\*11 For an actuator with lock, add the power for the lock.

# LEY-X7 Series

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

Dust-tight/Water-jet-proof (IP65 Equivalent/IP67 Equivalent)

## Specifications

### Servo Motor (24 VDC)

Model			LEY25□A-X7		
Actuator specifications	Work load*1 [kg]	Horizontal (3000 [mm/s <sup>2</sup> ]) Vertical (3000 [mm/s <sup>2</sup> ])	7	15	30
			2	5	11
	Pushing force [N]*2 *3		18 to 35	37 to 72	66 to 130
	Speed [mm/s]		2 to 300	1 to 150	1 to 75
	Max. acceleration/deceleration [mm/s <sup>2</sup> ]		3000		
	Pushing speed [mm/s]*4		35 or less		
	Positioning repeatability [mm]		±0.02		
	Lost motion [mm]*5		0.1 or less		
	Screw lead [mm]		12	6	3
	Impact/Vibration resistance [m/s <sup>2</sup> ]*6		50/20		
Actuator specifications	Actuation type		Ball screw + Belt (LEY□) Ball screw (LEY□D)		
	Guide type		Sliding bushing (Piston rod)		
	Enclosure*7		IP65 equivalent/IP67 equivalent		
	Operating temperature range [°C]		5 to 40		
	Operating humidity range [%RH]		90 or less (No condensation)		
Electric specifications	Motor size		□42		
	Motor type		Servo motor (24 VDC)		
	Encoder		Incremental		
	Power supply voltage [V]		24 VDC ±10%		
	Power [W]*8 *10		Max. power 96		
Lock unit specifications	Type*9		Non-magnetizing lock		
	Holding force [N]		78	157	294
	Power [W]*10		5		
	Rated voltage [V]		24 VDC ±10%		

- \*1 Horizontal: The max. value of the work load. An external guide is necessary to support the load. (Friction coefficient of guide: 0.1 or less) The actual work load and transfer speed change according to the condition of the external guide.  
Vertical: Speed changes according to the work load. Check the "Model Selection" on page 899.  
The values shown in ( ) are the acceleration/deceleration. Set these values to be 3000 [mm/s<sup>2</sup>] or less.
- \*2 Pushing force accuracy is ±20% (F.S.).
- \*3 The thrust setting values for LEY25A□ are 75% to 95%. The pushing force values change according to the duty ratio and pushing speed. Check the "Model Selection" on page 900.
- \*4 The allowable speed for pushing operation  
When push conveying a workpiece, operate at the vertical work load or less.
- \*5 A reference value for correcting errors in reciprocal operation
- \*6 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)  
Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)
- \*7 Cannot be used in an environment where oil such as cutting oil splashes or it is constantly exposed to water. Take appropriate protective measures. For details on enclosure, refer to the "Enclosure" on page 881.
- \*8 Indicates the max. power during operation (including the controller). This value can be used for the selection of the power supply.
- \*9 With lock only
- \*10 For an actuator with lock, add the power for the lock.

## Weight

### Weight: In-line Motor Type

LEY25D										
Stroke		30	50	100	150	200	250	300	350	400
Product weight [kg]	Step motor	1.49	1.56	1.73	1.98	2.16	2.33	2.51	2.68	2.86
	Servo motor	1.45	1.52	1.69	1.94	2.12	2.29	2.47	2.64	2.82

LEY32D												
Stroke		30	50	100	150	200	250	300	350	400	450	500
Product weight [kg]	Step motor	2.59	2.70	2.99	3.37	3.66	3.95	4.23	4.52	4.81	5.09	5.38

LEY40D												
Stroke		30	50	100	150	200	250	300	350	400	450	500
Product weight [kg]	Step motor	2.94	3.05	3.34	3.72	4.01	4.30	4.58	4.87	5.16	5.44	5.73



### Additional Weight

[kg]

Size		25	32	40
Lock		0.33	0.63	0.63
Rod end male thread	Male thread	0.03	0.03	0.03
	Nut	0.02	0.02	0.02
Foot bracket (2 sets including mounting bolt)		0.08	0.14	0.14
Rod flange (including mounting bolt)		0.17	0.20	0.20
Head flange (including mounting bolt)				

## Construction

In-line motor type: **LEY<sup>25</sup><sub>32</sub>D<sup>40</sup>**

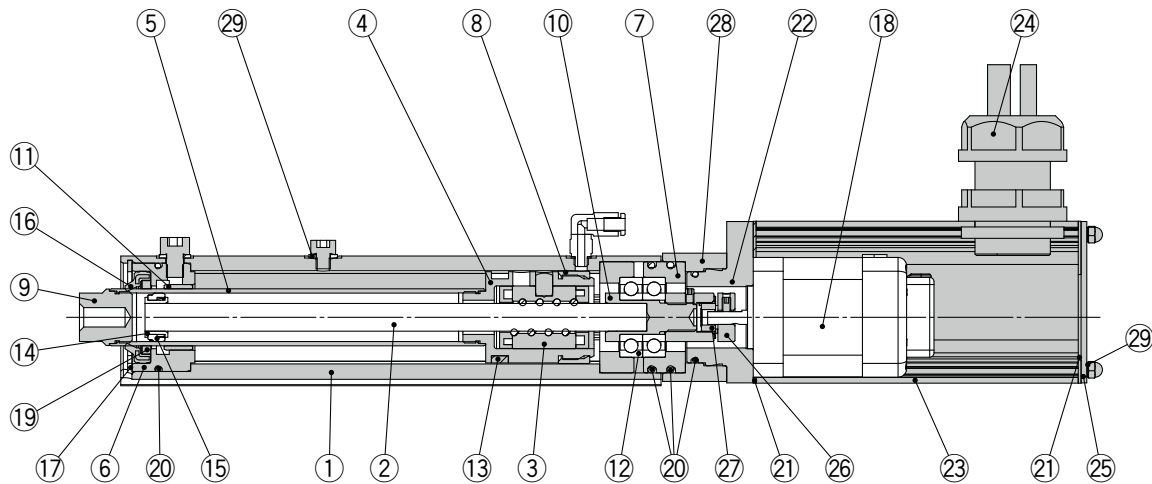

## Component Parts

No.	Description	Material	Note
1	<b>Body</b>	Aluminum alloy	Anodized
2	<b>Ball screw</b>	Alloy steel	
3	<b>Ball screw nut</b>	Synthetic resin/Alloy steel	
4	<b>Piston</b>	Aluminum alloy	
5	<b>Piston rod</b>	Stainless steel	Hard chrome plating
6	<b>Rod cover</b>	Aluminum alloy	Anodized
7	<b>Bearing holder</b>	Aluminum alloy	
8	<b>Rotation stopper</b>	Resin	
9	<b>Socket</b>	Stainless steel	
10	<b>Connected shaft</b>	Free cutting carbon steel	Nickel plating
11	<b>Bushing</b>	Bearing alloy	
12	<b>Bearing</b>	—	
13	<b>Magnet</b>	—	
14	<b>Wear ring holder</b>	Stainless steel	Stroke 101 mm or more
15	<b>Wear ring</b>	Resin	Stroke 101 mm or more
16	<b>Greater water resistant scraper</b>	Stainless steel/NBR	

No.	Description	Material	Note
17	<b>Retaining ring</b>	Stainless steel	
18	<b>Motor</b>	—	
19	<b>Lube-retainer</b>	Felt	
20	<b>O-ring</b>	NBR	
21	<b>Gasket</b>	Chloroprene	
22	<b>Motor adapter</b>	Aluminum alloy	LEY25 only
23	<b>Motor cover</b>	Aluminum alloy	Anodized
24	<b>Seal connector</b>	—	
25	<b>End cover</b>	Aluminum alloy	Anodized
26	<b>Hub</b>	Aluminum alloy	
27	<b>Spider</b>	NBR	
28	<b>Motor block</b>	Aluminum alloy	Anodized
29	<b>Seal washer</b>	Stainless steel/NBR	
30	<b>Socket (Male thread)</b>	Stainless steel	
31	<b>Nut</b>	Stainless steel	

## Replacement Parts/Grease Pack

Applied portion	Order no.
Piston rod	GR-S-010 (10 g) GR-S-020 (20 g)

\* Apply grease to the piston rod periodically.  
Grease should be applied when 1 million cycles or 200 km have been reached, whichever comes first.

# LEY-X7 Series


Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)


Dust-tight/Water-jet-proof (IP65 Equivalent/IP67 Equivalent)

## Dimensions

### In-line motor type

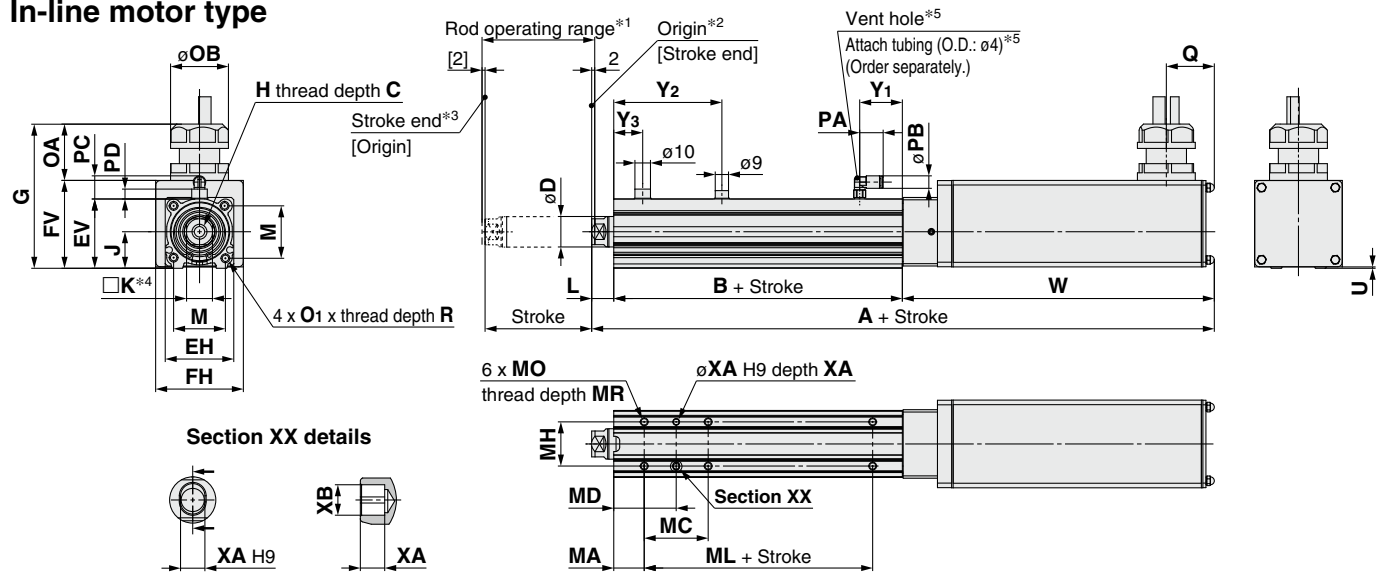

Rod end male thread: LEY32D□-□□M



Size	B <sub>1</sub>	C <sub>1</sub>	D	H <sub>1</sub>	L <sub>1</sub>	L <sub>2</sub>	MM
25	22	20.5	20	8	38	23.5	M14 x 1.5
32/40	22	20.5	25	8	42	23.5	M14 x 1.5

\* The L<sub>1</sub> measurement is when the unit is in the original position. At this position, 2 mm at the end.

Size	Stroke range [mm]	A		B	C	D	EH	EV	FH	FV	G	H	J	K	L	M
		Without lock	With lock													
25	30 to 100	259	309	89.5	13	20	44	45.5	57.6	57.7	94.7	M8 x 1.25	24	17	14.5	34
	105 to 400	284	334	114.5												
32	30 to 100	269.5	319.5	96	13	25	51	56.5	69.6	79.6	116.6	M8 x 1.25	31	22	18.5	40
	105 to 500	299.5	349.5	126												
40	30 to 100	291.5	341.5	96	13	25	51	56.5	69.6	79.6	116.6	M8 x 1.25	31	22	18.5	40
	105 to 500	321.5	371.5	126												

Size	Stroke range [mm]	O <sub>1</sub>	R	OA	OB	PA	PB	PC	PD	Q	U	W		Y <sub>1</sub>	Y <sub>2</sub>	Y <sub>3</sub>
												Without lock	With lock			
25	30 to 100	M5 x 0.8	8	37	38	15.4	8.2	15.9	6.5	31.5	0.9	155	205	28	71	19
	105 to 400														96	
32	30 to 100	M6 x 1.0	10	37	38	15.4	8.2	15.9	7.1	31.5	1	155	205	30	75.5	16
	105 to 500														105.5	
40	30 to 100	M6 x 1.0	10	37	38	15.4	8.2	15.9	7.1	31.5	1	177	227	30	75.5	16
	105 to 500														105.5	

### Body Bottom Tapped

Size	Stroke range [mm]	MA	MC	MD	MH	ML	MO	MR	XA	XB
25	30 to 39	20	24	32	29	50	M5 x 0.8	6.5	4	5
	40 to 100		42	41		75				
	101 to 124		59	49.5		75				
	125 to 200		59	49.5		75				
	201 to 400		76	58		75				
32/40	30 to 39	25	22	36	30	50	M6 x 1	8.5	5	6
	40 to 100		36	43		80				
	101 to 124		53	51.5		80				
	125 to 200		53	51.5		80				
	201 to 500		70	60		80				

\*1 This is the range within which the rod can move when it returns to origin.

Make sure that workpieces mounted on the rod do not interfere with other workpieces or the facilities around the rod.

\*2 Position after returning to origin

\*3 [ ] for when the direction of return to origin has changed

\*4 The direction of rod end width across flats (□K) differs depending on the products.

\*5 The vent hole is the port for releasing to atmosphere. Do not apply pressure to this hole.


Attach tubing to the vent hole and place the end of the tubing so it is not exposed to dust or water.

For the mounting bracket dimensions, refer to the **Web Catalog**.

# LEY-X7 Series Auto Switch Mounting

## Auto Switch Proper Mounting Position

Applicable auto switch: D-M9□A(V)

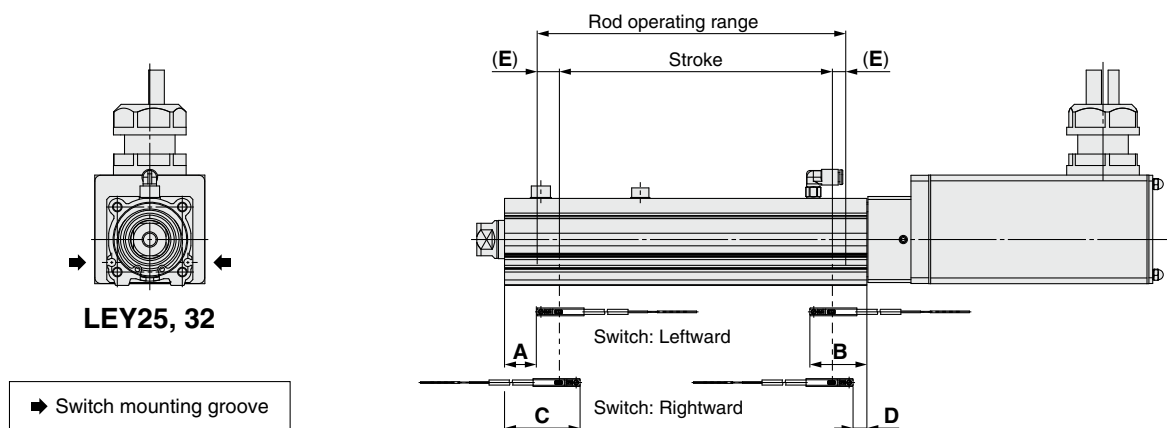


								[mm]
Size	Stroke range	Auto switch position				Return to origin distance	Operating range	
		Leftward mounting		Rightward mounting				
		A	B	C	D	E	—	
25	15 to 100	27	62.5	39	50.5	(2)	4.2	
	105 to 400	52		64				
32/40	20 to 100	30.5	85.5	42.5	53.5	(2)	4.9	
	105 to 500	90.5		102.5				

\* The values in the table above are to be used as a reference when mounting auto switches for stroke end detection. Adjust the auto switch after confirming the operating conditions in the actual setting.

\* Since the operating range is provided as a guideline including hysteresis, it cannot be guaranteed (assuming approx.  $\pm 30\%$  dispersion). It may change substantially depending on the ambient environment.

## Auto Switch Mounting

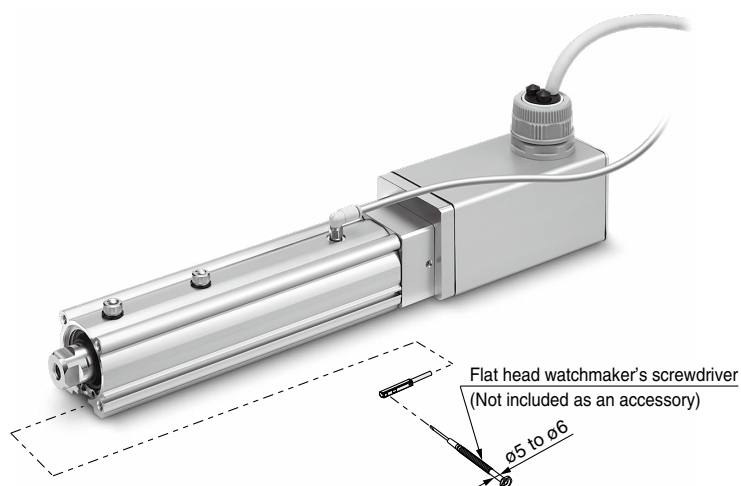

### Tightening Torque for Auto Switch Mounting Screw [N·m]

Auto switch model	Tightening torque
D-M9□A(V)	0.05 to 0.10


\* When tightening the auto switch mounting screw (included with the auto switch), use a watchmaker's screwdriver with a handle diameter of 5 to 6 mm.

# Water Resistant 2-Color Indicator Solid State Auto Switch: Direct Mounting Type D-M9NA(V)/D-M9PA(V)/D-M9BA(V)



## Grommet

- Water (coolant) resistant type
- 2-wire load current is reduced (2.5 to 40 mA).
- The proper operating range can be determined by the color of the light. (Red → Green ← Red)
- Using flexible cable as standard spec.

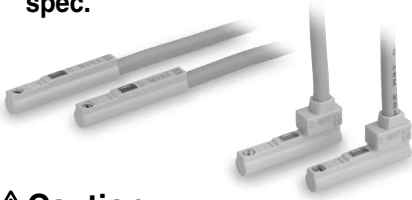

## Caution

### Precautions

Fix the auto switch with the existing screw installed on the auto switch body. The auto switch may be damaged if a screw other than the one supplied is used.  
Please contact SMC if using coolant liquid other than water based solution.

## Weight


[g]

Auto switch model	D-M9NA(V)	D-M9PA(V)	D-M9BA(V)
Lead wire length			
0.5 m (Nil)	8	7	
1 m (M)	14	13	
3 m (L)	41	38	
5 m (Z)	68	63	


## Dimensions

[mm]

### D-M9□A

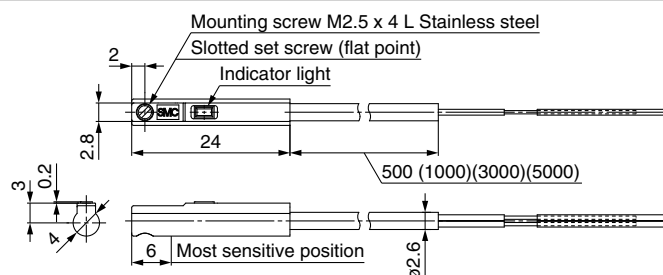

### D-M9□AV

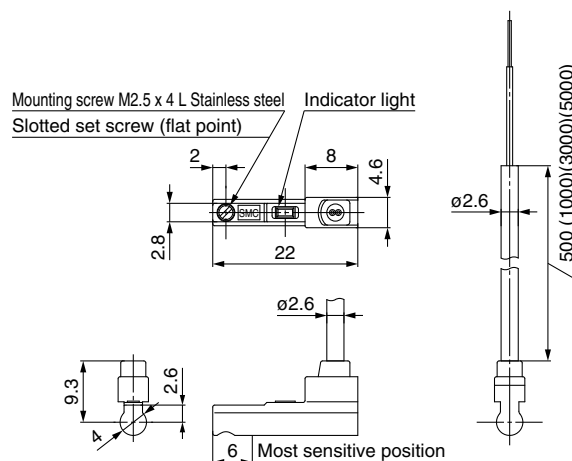

## Auto Switch Specifications

PLC: Programmable Logic Controller

D-M9□A, D-M9□AV (With indicator light)						
Auto switch model	D-M9NA	D-M9NAV	D-M9PA	D-M9PAV	D-M9BA	D-M9BAV
Electrical entry direction	In-line	Perpendicular	In-line	Perpendicular	In-line	Perpendicular
Wiring type	3-wire				2-wire	
Output type	NPN		PNP		—	
Applicable load	IC circuit, Relay, PLC				24 VDC relay, PLC	
Power supply voltage	5, 12, 24 VDC (4.5 to 28 V)				—	
Current consumption	10 mA or less				—	
Load voltage	28 VDC or less		—		24 VDC (10 to 28 VDC)	
Load current	40 mA or less				2.5 to 40 mA	
Internal voltage drop	0.8 V or less at 10 mA (2 V or less at 40 mA)				4 V or less	
Leakage current	100 μA or less at 24 VDC				0.8 mA or less	
Indicator light	Operating range ..... Red LED illuminates. Proper operating range ..... Green LED illuminates.					
Standard	CE/UKCA marking					

## Oilproof Flexible Heavy-duty Lead Wire Specifications

Auto switch model		D-M9NA□	D-M9NAV□	D-M9PA□	D-M9PAV□	D-M9BA□	D-M9BAV□
Sheath	Outside diameter [mm]	ø2.6					
Insulator	Number of cores	3 cores (Brown/Blue/Black)				2 cores (Brown/Blue)	
	Outside diameter [mm]	ø0.88					
Conductor	Effective area [mm²]	0.15					
	Strand diameter [mm]	ø0.05					
Min. bending radius [mm]		17					


\* Refer to page 1363 for solid state auto switch common specifications.

\* Refer to page 1363 for lead wire lengths.



### LEY-X5 (Made to Order)

LEY63□□□-□P

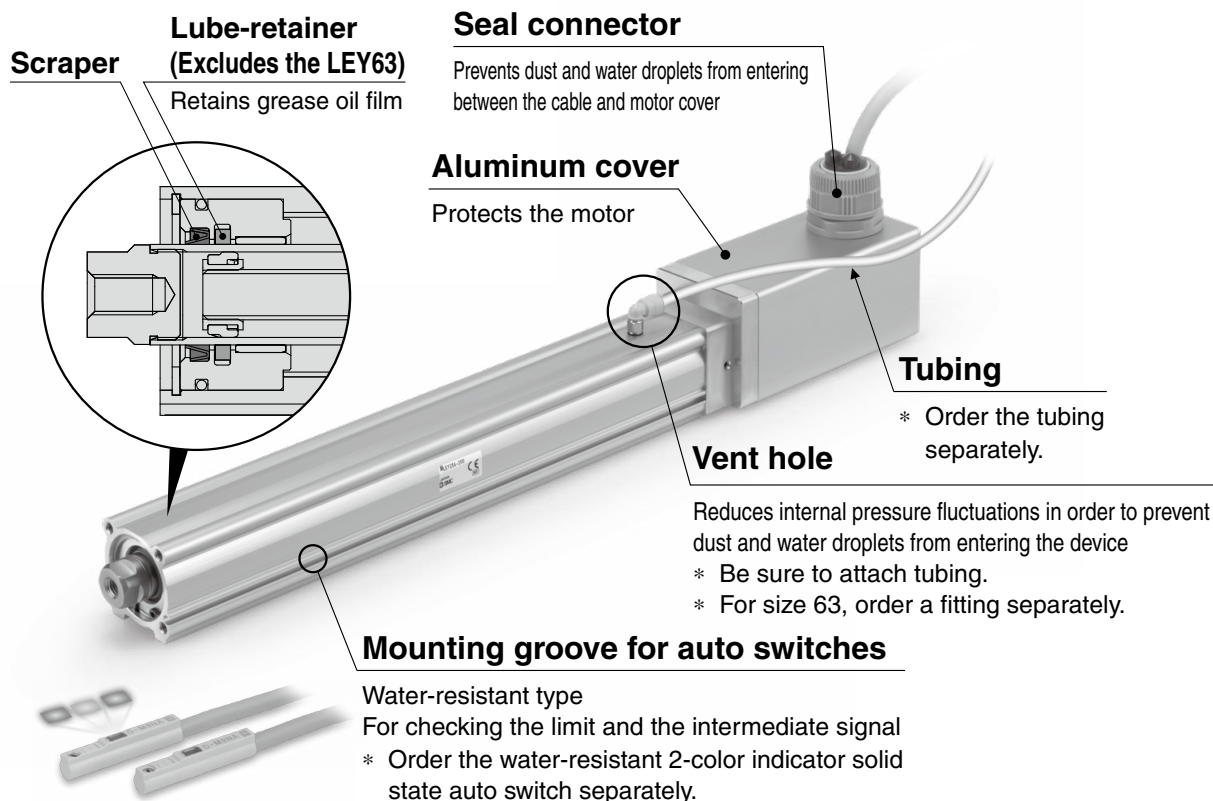

\*1 IP65 enclosure: The protection structure against solid foreign objects is dust-tight type and the protection structure against water is water-jet-proof type.

Dust-tight means that no dust can enter the inside of the equipment.

Water-jet-proof means that the product is not adversely affected by direct water jets from any direction. That is, even when direct water jets are applied to the product for 3 minutes by means of the pre-determined method, there is no water entry that hinders the correct operation inside the equipment. Be sure to take appropriate protective measures if the product is to be used in an environment where it will be constantly exposed to water or fluids other than water splash. In particular, the product cannot be used in environments where oils, such as cutting oil or cutting fluid, are present.

### LEY-X5 (Made to Order)

Size 25, 32

Step Motor (Servo/24 VDC)


Servo Motor (24 VDC)

p. 917



AC Servo Motor (100/200 W)

p. 925, 931

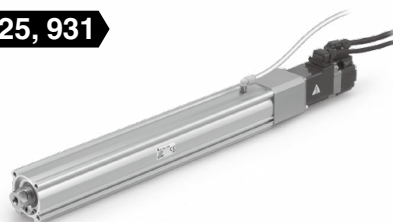

### LEY63□□□-□P

Size 63

AC Servo Motor (400 W)

p. 473, 489


\* Option





# Model Selection

LEY-X5 Series ▶ p. 917

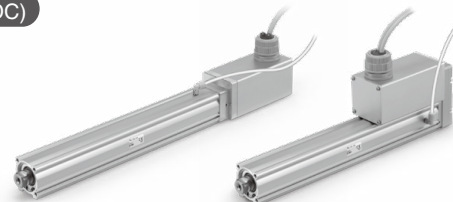

Refer to page 914 for the LECPA, JXC $\frac{1}{2}$ , and LECA6.


## Speed-Work Load Graph (Guide)

For Step Motor (Servo/24 VDC) JXC $\frac{1}{2}$ , LECP1

### Horizontal


#### LEY25 $\square$ -X5

for acceleration/deceleration: 2000 mm/s<sup>2</sup>

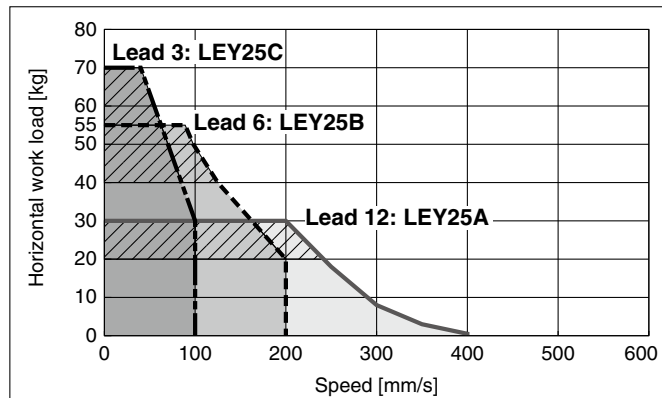


#### LEY32 $\square$ -X5

for acceleration/deceleration: 2000 mm/s<sup>2</sup>

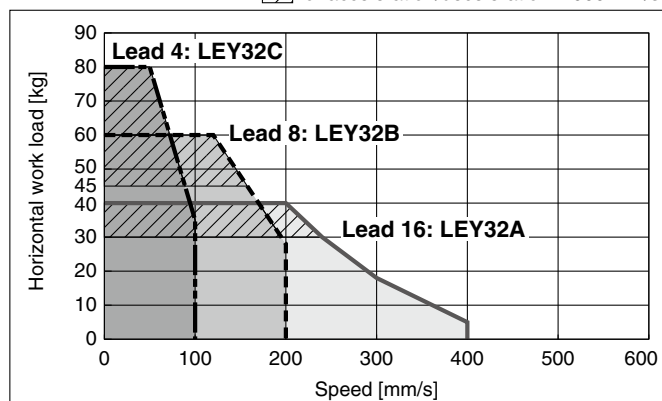


### Vertical


#### LEY25 $\square$ -X5

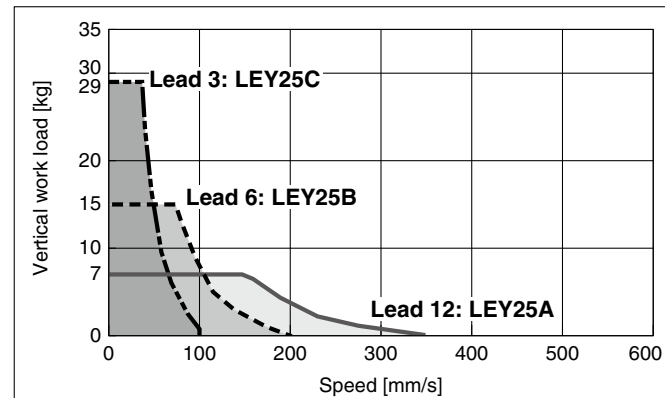

#### LEY32 $\square$ -X5

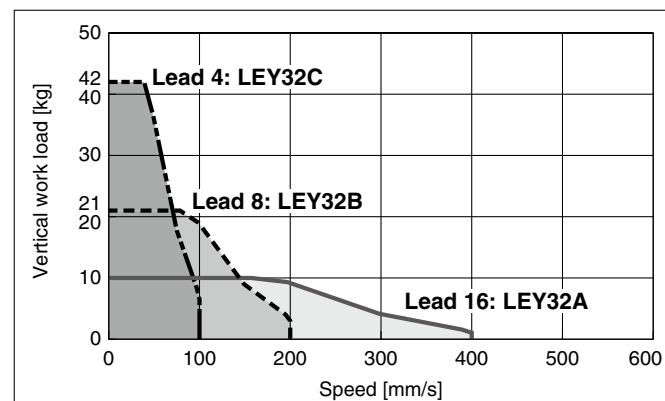

## Graph of Allowable Lateral Load on the Rod End (Guide)

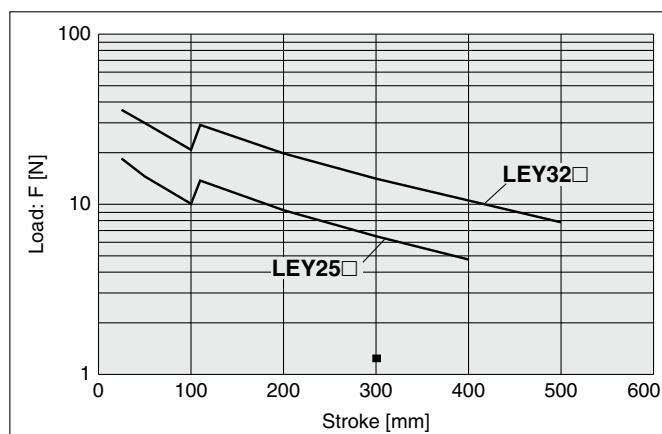


\* The changes in the graph waveforms are due to the difference in components of different product strokes.


## Rod Displacement: $\delta$ [mm]

Stroke	30	50	100	150	200	250	300	350	400	450	500
Size											
25	±0.3	±0.4	±0.7	±0.7	±0.9	±1.1	±1.3	±1.5	±1.7	—	—
32	±0.3	±0.4	±0.7	±0.6	±0.8	±1.0	±1.1	±1.3	±1.5	±1.7	±1.8

\* The values without a load are shown.



$$[\text{Stroke}] = [\text{Product stroke}] + [\text{Distance from the rod end to the center of gravity of the workpiece}]$$

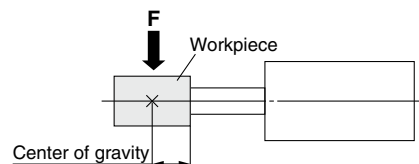

Refer to page 913 for the JXC□1,  
LECP1 and below for the LECA6.


## Speed-Work Load Graph (Guide)

### For Step Motor (Servo/24 VDC) LECPA, JXC□<sup>2</sup><sub>3</sub>

#### Horizontal


##### LEY25□-X5

▨ for acceleration/deceleration: 2000 mm/s<sup>2</sup>

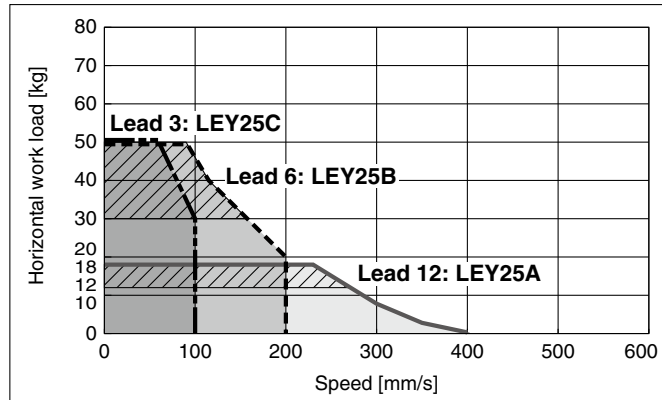


##### LEY32□-X5

▨ for acceleration/deceleration: 2000 mm/s<sup>2</sup>

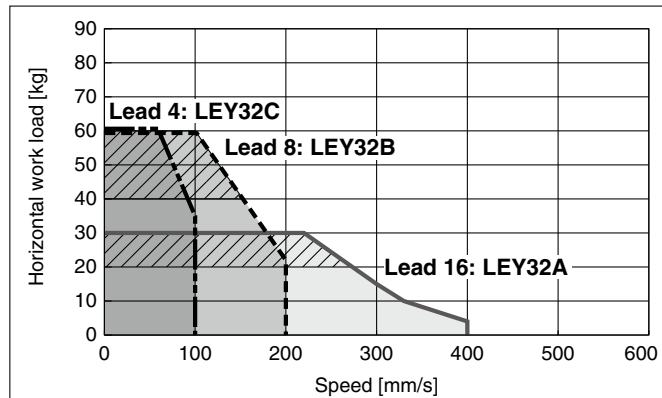


#### Vertical

##### LEY25□-X5

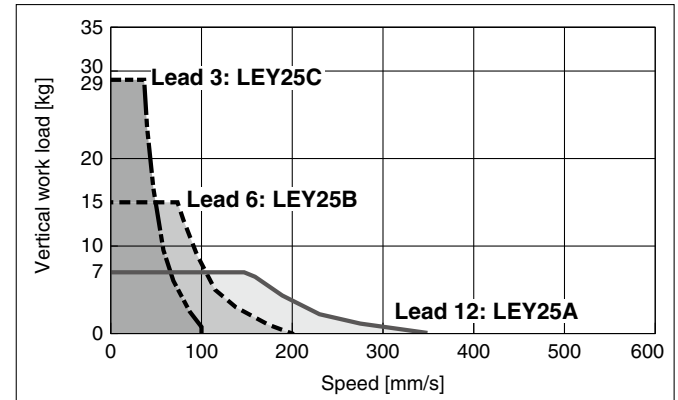


##### LEY32□-X5

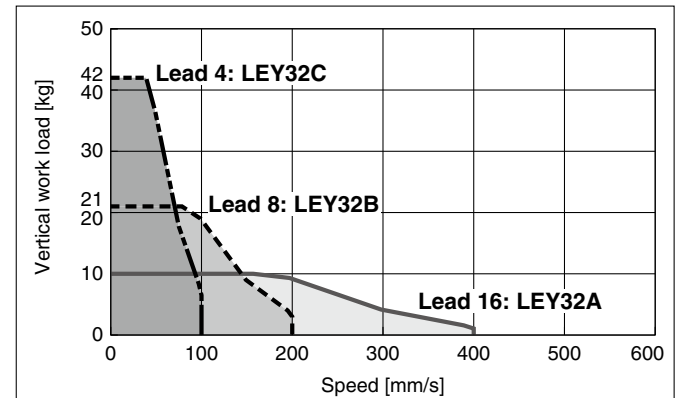

## For Servo Motor (24 VDC) LECA6


#### Horizontal

##### LEY25□A-X5

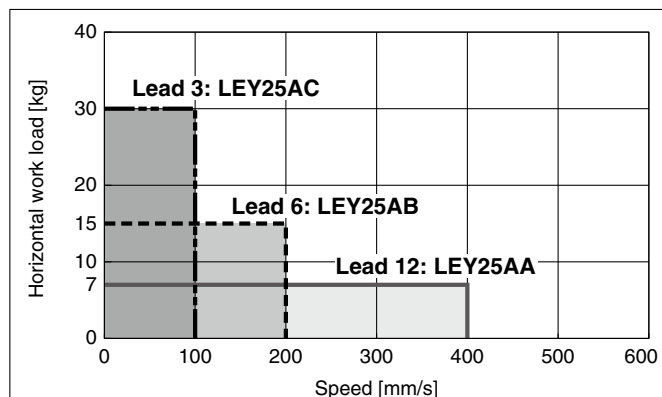

#### Vertical

##### LEY25□A-X5

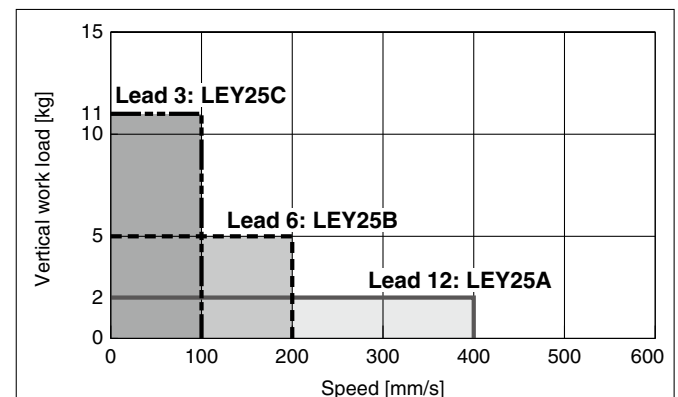

# LEY-X5 Series

Incremental (Step Motor 24 VDC)


Incremental (Servo Motor 24 VDC)

Dust-tight/Water-jet-proof (IP65 Equivalent)

## Force Conversion Graph


### Step Motor (Servo/24 VDC)

#### LEY25□-X5

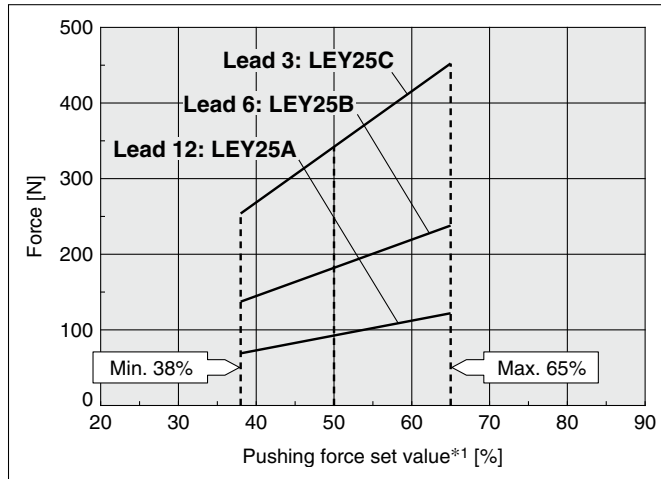


Ambient temperature	Pushing force set value*1 [%]	Duty ratio [%]	Continuous pushing time [min]
40°C or less	65 or less	100	No restriction

#### LEY32□-X5

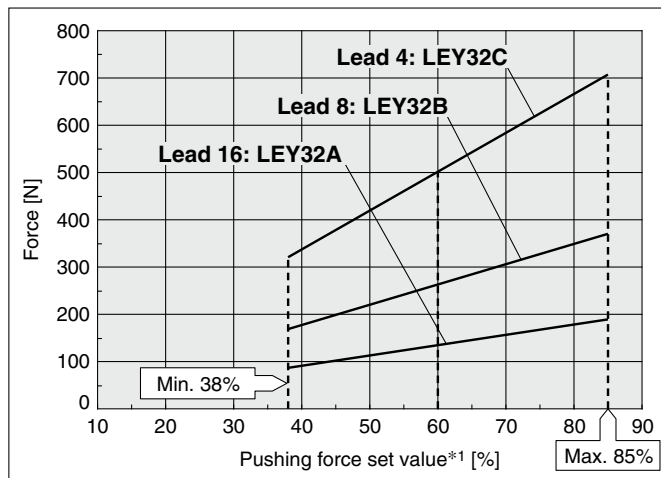

Ambient temperature	Pushing force set value*1 [%]	Duty ratio [%]	Continuous pushing time [min]
25°C or less	85 or less	100	No restriction
40°C	65 or less	100	No restriction
	85	50	15 or less

## Non-rotating Accuracy of Rod




Size	Non-rotating accuracy θ
25	±0.8°
32	±0.7°

\* Avoid using the electric actuator in such a way that rotational torque would be applied to the piston rod.  
Failure to do so may result in the deformation of the non-rotating guide, abnormal auto switch responses, play in the internal guide, or an increase in the sliding resistance.

### Servo Motor (24 VDC)

#### LEY25□A-X5

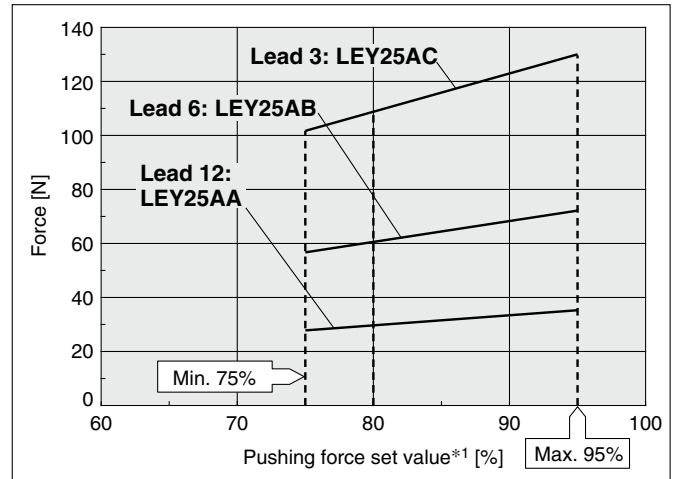

Ambient temperature	Pushing force set value*1 [%]	Duty ratio [%]	Continuous pushing time [min]
40°C or less	95 or less	100	No restriction

## <Limit Values for Pushing Force and Trigger Level in Relation to Pushing Speed> Without Load

Model	Lead	Pushing speed [mm/s]	Pushing force (Setting input value)	Model	Lead	Pushing speed [mm/s]	Pushing force (Setting input value)
LEY25	A/B/C	21 to 35	50 to 65%	LEY25□A	A/B/C	21 to 35	80 to 95%
LEY32	A	24 to 30	60 to 85%				
	B/C	21 to 30	60 to 85%				

There is a limit to the pushing force in relation to the pushing speed. If the product is operated outside of the range (low pushing force), the completion signal [INP] may be output before the pushing operation has been completed (during the moving operation).  
If operating with the pushing speed below the min. speed, please check for operating problems before using the product.

## <Set Values for Vertical Upward Transfer Pushing Operations>

For vertical loads (upward), set the pushing force to the max. value shown below and operate at the work load or less.

Model	LEY25□	LEY32□	LEY25□A
Lead	A B C	A B C	A B C
Work load [kg]	2.5 5 10	4.5 9 18	1.2 2.5 5
Pushing force	65%	85%	95%

\*1 Set values for the controller



Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

## Rod Type

Dust-tight/Water-jet-proof (IP65 Equivalent)




\* For details, refer to page 1343 and onward.

## LEY-X5 (Made to Order) Series LEY25, 32

RoHS


Refer to pages 913 to 915 for model selection.

## How to Order

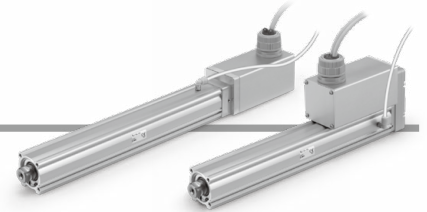

LEY 25 D B - 50 - R1

1 2 3 4 5 6 7 8 9

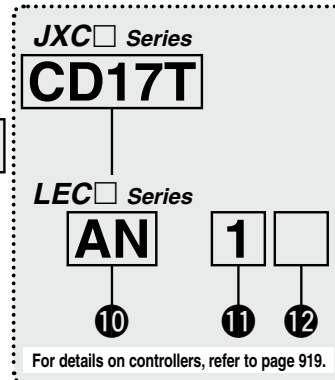

-X5

• Made to order:  
Dust-tight/  
Water-jet-proof

## 1 Size

25
32

## 2 Motor mounting position

Nil	Top side parallel
D	In-line

## 3 Motor type

Symbol	Type	Size		Compatible controllers/drivers
		25	32	
Nil	Step motor (Servo/24 VDC)	●	●	JXC51 JXCEF JXC61 JXC9F JXCE1 JXCPF JXC91 JXCLF JXCP1 JXCD1 LECP1 JXCL1 LECPA JXCM1
A	Servo motor (24 VDC)	●	—	LECA6

## 4 Lead [mm]

Symbol	LEY25	LEY32
A	12	16
B	6	8
C	3	4


## 5 Stroke [mm]

30	30
to	to
500	500

\* For details, refer to the applicable stroke table below.

## 6 Motor option\*2

Nil	Without option
B	With lock



## 7 Rod end thread

Nil	Rod end female thread
M	Rod end male thread (1 rod end nut is included.)

## 8 Mounting\*3

Symbol	Type	Motor mounting position	
		Parallel	In-line
Nil	Ends tapped/Body bottom tapped*4	●	●
L	Foot bracket	●	—
F	Rod flange*4	●*5	●
G	Head flange*4	●*6	—

## 9 Actuator cable type/length

Robotic cable [m]			
R1	1.5	RA	10*7
R3	3	RB	15*7
R5	5	RC	20*7
R8	8*7		

## Applicable Stroke Table\*1

●: Standard

Model	Stroke [mm]	30	50	100	150	200	250	300	350	400	450	500	Manufacturable stroke range
LEY25		●	●	●	●	●	●	●	●	●	—	—	15 to 400
LEY32		●	●	●	●	●	●	●	●	●	●	●	20 to 500

\* For auto switches, refer to pages 936 and 937.

\* "-X5" is not added to an actuator model with a controller/driver part number suffix. Example) "LEY25DB-100" for the LEY25DB-100BM-R1AN1-X5

## JXC Series (For details, refer to page 919.)

### 10 Controller

Nil	Without controller
C□1□□	With controller

**C D 1 7 T**

#### Interface (Communication protocol/Input/Output)

Symbol	Type	Number of axes, Special specification	Standard	With STO sub-function
5	Parallel input (NPN)	●	●	
6	Parallel input (PNP)	●	●	
E	EtherCAT	●	●	●
9	EtherNet/IP™	●	●	●
P	PROFINET	●	●	●
D	DeviceNet®	●	●	●
L	IO-Link	●	●	●
M	CC-Link	●	●	●

#### Mounting

7	Screw mounting
8*13	DIN rail

#### Number of axes, Special specification

Symbol	Number of axes	Specification
1	Single axis	Standard
F	Single axis	With STO sub-function

#### Communication plug connector, I/O cable\*14

Symbol	Type	Applicable interface
Nil	Without accessory	—
S	Straight type communication plug connector	DeviceNet®
T	T-branch type communication plug connector	CC-Link Ver. 1.10
1	I/O cable (1.5 m)	Parallel input (NPN) Parallel input (PNP)
3	I/O cable (3 m)	
5	I/O cable (5 m)	

## LEC Series (For details, refer to page 919.)

**AN 1**

### 10 Controller/Driver type\*8

Nil	Without controller/driver	
6N	<b>LECA6</b>	NPN
6P	(Step data input type)	PNP
1N	<b>LECP1</b> *9	NPN
1P	(Programless type)	PNP
AN	<b>LECPA</b> *9 *10	NPN
AP	(Pulse input type)	PNP

### 11 I/O cable length\*11

Nil	Without cable
1	1.5 m
3	3 m*12
5	5 m*12

### 12 Controller/Driver mounting

Nil	Screw mounting
D	DIN rail*13

- \*1 Please contact SMC for non-standard strokes as they are produced as special orders.
- \*2 When "With lock" is selected for the top side parallel motor type, the motor body will stick out from the end of the body for strokes of 50 mm or less. Check for interference with workpieces before selecting a model.
- \*3 The mounting bracket is shipped together with the product but does not come assembled.
- \*4 For the horizontal cantilever mounting of the rod flange, head flange, or ends tapped types, use the actuator within the following stroke range.  
· LEY25: 200 mm or less · LEY32: 100 mm or less
- \*5 The rod flange type is not available for the LEY25/32 with strokes of 50 mm or less and motor option "With lock."
- \*6 The head flange type is not available for the LEY32.
- \*7 Produced upon receipt of order (Robotic cable only)
- \*8 For details on controllers/drivers and compatible motors, refer to the compatible controllers/drivers on the next page.

- \*9 Only available for the motor type "Step motor"
- \*10 When pulse signals are open collector, order the current limiting resistor (LEC-PA-R-□) on page 1062 separately.
- \*11 When "Without controller/driver" is selected for controller/driver types, I/O cable cannot be selected. If an I/O cable is required, refer to the cable for the LECA6 ([Web Catalog](#)), LECP1 ([Web Catalog](#)), or LECPA ([Web Catalog](#)).
- \*12 When "Pulse input type" is selected for controller/driver types, pulse input usable only with differential. Only 1.5 m cables usable with open collector
- \*13 The DIN rail is not included. It must be ordered separately.
- \*14 Select "Nil" for anything other than DeviceNet®, CC-Link, or parallel input.  
Select "Nil," "S," or "T" for DeviceNet® or CC-Link.  
Select "Nil," "1," "3," or "5" for parallel input.

## ⚠ Caution

### [CE/UKCA-compliant products]



- EMC compliance was tested by combining the electric actuator LEY series and the controller LEC/JXC series.  
The EMC depends on the configuration of the customer's control panel and the relationship with other electrical equipment and wiring. Therefore, compliance with the EMC directive cannot be certified for SMC components incorporated into the customer's equipment under actual operating conditions. As a result, it is necessary for the customer to verify compliance with the EMC directive for the machinery and equipment as a whole.
- For the incremental (servo motor 24 VDC) specification, EMC compliance was tested by installing a noise filter set (LEC-NFA). Refer to page 1037 for the noise filter set. Refer to the LECA series Operation Manual for installation.

## The actuator and controller/driver are sold as a package.

Confirm that the combination of the controller/driver and actuator is correct.

### <Check the following before use.>

- Check the actuator label for the model number. This number should match that of the controller/driver.
- Check that the Parallel I/O configuration matches (NPN or PNP).



\* Refer to the Operation Manual for using the products. Please download it via our website: <https://www.smcworld.com>





# LEY-X5 Series











Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

Dust-tight/Water-jet-proof (IP65 Equivalent)

## Compatible Controllers/Drivers

Type	Step data input type	Step data input type	Programless type	Pulse input type
				
Series	<b>JXC51 JXC61</b>	<b>LECA6</b>	<b>LECP1</b>	<b>LECPA</b>
Features	Parallel I/O	Parallel I/O	Capable of setting up operation (step data) without using a PC or teaching box	Operation by pulse signals
Compatible motor	Step motor (Servo/24 VDC)	Incremental (Servo motor 24 VDC)	Step motor (Servo/24 VDC)	
Max. number of step data	64 points		14 points	—
Power supply voltage	24 VDC			
Reference page	1017	1031	1042	1057

Type	EtherCAT direct input type	EtherCAT direct input type with STO sub-function	EtherNet/IP™ direct input type	EtherNet/IP™ direct input type with STO sub-function	PROFINET direct input type	PROFINET direct input type with STO sub-function	DeviceNet® direct input type	IO-Link direct input type	IO-Link direct input type with STO sub-function	CC-Link direct input type
										
Series	<b>JXCE1</b>	<b>JXCEF</b>	<b>JXC91</b>	<b>JXC9F</b>	<b>JXCP1</b>	<b>JXCPF</b>	<b>JXCD1</b>	<b>JXCL1</b>	<b>JXCLF</b>	<b>JXCM1</b>
Features	EtherCAT direct input	EtherCAT direct input with STO sub-function	EtherNet/IP™ direct input	EtherNet/IP™ direct input with STO sub-function	PROFINET direct input	PROFINET direct input with STO sub-function	DeviceNet® direct input	IO-Link direct input	IO-Link direct input with STO sub-function	CC-Link direct input
Compatible motor	Step motor (Servo/24 VDC)									
Max. number of step data	64 points									
Power supply voltage	24 VDC									
Reference page	1063									



## Specifications

### Step Motor (Servo/24 VDC)

Model				LEY25□-X5			LEY32□-X5			
Actuator specifications	Work load [kg]*1	Horizontal	For JXC□1, JXC□F, LECP1	(3000 [mm/s²])	20	40	60	30	45	60
				(2000 [mm/s²])	30	60	70	40	60	80
		For LECPA JXC□2	(3000 [mm/s²])	12	30	30	20	40	40	
			(2000 [mm/s²])	18	50	50	30	60	60	
		Vertical*12	(3000 [mm/s²])	7	15	29	10	21	42	
	Pushing force [N]*2 *3 *4				63 to 122	126 to 238	232 to 452	80 to 189	156 to 370	296 to 707
	Speed [mm/s]*4				18 to 400	9 to 200	5 to 100	24 to 400	12 to 200	6 to 100
	Max. acceleration/deceleration [mm/s²]				3000					
	Pushing speed [mm/s]*5				35 or less			30 or less		
	Positioning repeatability [mm]				±0.02					
Lost motion [mm]*6				0.1 or less						
Screw lead [mm]				12	6	3	16	8	4	
Impact/Vibration resistance [m/s²]*7				50/20						
Actuation type				Ball screw + Belt (LEY□) Ball screw (LEY□D)						
Guide type				Sliding bushing (Piston rod)						
Enclosure*8				IP65 equivalent						
Operating temperature range [°C]				5 to 40						
Operating humidity range [%RH]				90 or less (No condensation)						
Electric specifications	Motor size				□42		□56.4			
	Motor type				Step motor (Servo/24 VDC)					
	Encoder				Incremental					
	Power supply voltage [V]				24 VDC ±10%					
Lock unit specifications	Power [W]*9 *11				Max. power 48		Max. power 104			
	Type*10				Non-magnetizing lock					
	Holding force [N]				78	157	294	108	216	421
	Power [W]*11				5			5		
	Rated voltage [V]				24 VDC ±10%					

\*1 Horizontal: The max. value of the work load. An external guide is necessary to support the load. (Friction coefficient of guide: 0.1 or less) The actual work load and transfer speed change according to the condition of the external guide. Also, speed changes according to the work load. Check the "Model Selection" on pages 913 and 914.

Vertical: Speed changes according to the work load. Check the "Model Selection" on pages 913 and 914.

The values shown in ( ) are the acceleration/deceleration. Set these values to be 3000 [mm/s<sup>2</sup>] or less.

\*2 Pushing force accuracy is ±20% (F.S.).

\*3 The thrust setting values for LEY25□ are 38% to 65% and for LEY32□ are 38% to 85%. The pushing force values change according to the duty ratio and pushing speed. Check the "Model Selection" on page 915.

\*4 The speed and force may change depending on the cable length, load, and mounting conditions. Furthermore, if the cable length exceeds 5 m, then it will decrease by up to 10% for each 5 m. (At 15 m: Reduced by up to 20%)

\*5 The allowable speed for pushing operations. When push conveying a workpiece, operate at the vertical work load or less.

\*6 A reference value for correcting errors in reciprocal operation

\*7 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

\*8 Cannot be used in an environment where oil such as cutting oil splashes or it is constantly exposed to water

Take appropriate protective measures. For details on enclosure, refer to the "Enclosure" on page 881.

\*9 Indicates the max. power during operation (including the controller). This value can be used for the selection of the power supply.

\*10 With lock only

\*11 For an actuator with lock, add the power for the lock.

\*12 When mounting vertically and using the product facing upwards in an environment where water is present, take necessary measures to prevent water from splashing on the rod cover, because water will accumulate on the rod seal due to the structure of the product.

# LEY-X5 Series

Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

Dust-tight/Water-jet-proof (IP65 Equivalent)

## Specifications

### Servo Motor (24 VDC)

Model			LEY25□A-X5			
Actuator specifications	Work load [kg]*1	Horizontal	(3000 [mm/s <sup>2</sup> ])	7	15	30
		Vertical*11	(3000 [mm/s <sup>2</sup> ])	2	5	11
	Pushing force [N]*2 *3			18 to 35	37 to 72	66 to 130
	Speed [mm/s]			2 to 400	1 to 200	1 to 100
	Max. acceleration/deceleration [mm/s <sup>2</sup> ]			3000		
	Pushing speed [mm/s]*4			35 or less		
	Positioning repeatability [mm]			±0.02		
	Lost motion [mm]*5			0.1 or less		
	Screw lead [mm]			12	6	3
	Impact/Vibration resistance [m/s <sup>2</sup> ]*6			50/20		
Electric specifications	Actuation type			Ball screw + Belt (LEY□) Ball screw (LEY□D)		
	Guide type			Sliding bushing (Piston rod)		
	Enclosure*7			IP65 equivalent		
	Operating temperature range [°C]			5 to 40		
	Operating humidity range [%RH]			90 or less (No condensation)		
Lock unit specifications	Motor size			□42		
	Motor type			Servo motor (24 VDC)		
	Encoder			Incremental		
	Power supply voltage [V]			24 VDC ±10%		
	Power [W]*8 *10			Max. power 96		
Lock unit specifications	Type*9			Non-magnetizing lock		
	Holding force [N]			78	157	294
	Power [W]*10			5		
	Rated voltage [V]			24 VDC ±10%		

- \*1 Horizontal: The max. value of the work load. An external guide is necessary to support the load. (Friction coefficient of guide: 0.1 or less) The actual work load and transfer speed change according to the condition of the external guide. Vertical: Speed changes according to the work load. Check the "Model Selection" on page 914. The values shown in ( ) are the acceleration/deceleration. Set these values to be 3000 [mm/s<sup>2</sup>] or less.
- \*2 Pushing force accuracy is ±20% (F.S.).
- \*3 The thrust setting values for LEY25A□ are 75% to 95%. The pushing force values change according to the duty ratio and pushing speed. Check the "Model Selection" on page 915.
- \*4 The allowable speed for pushing operations When push conveying a workpiece, operate at the vertical work load or less.
- \*5 A reference value for correcting errors in reciprocal operation
- \*6 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.) Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)
- \*7 Cannot be used in an environment where oil such as cutting oil splashes or it is constantly exposed to water Take appropriate protective measures. For details on enclosure, refer to the "Enclosure" on page 881.
- \*8 Indicates the max. power during operation (including the controller). This value can be used for the selection of the power supply.
- \*9 With lock only
- \*10 For an actuator with lock, add the power for the lock.
- \*11 When mounting vertically and using the product facing upwards in an environment where water is present, take necessary measures to prevent water from splashing on the rod cover, because water will accumulate on the rod seal due to the structure of the product.

## Weight

### Weight: Top Side Parallel Motor Type

Model		LEY25-X5										LEY32-X5									
Stroke [mm]		30	50	100	150	200	250	300	350	400	30	50	100	150	200	250	300	350	400	450	500
Product weight [kg]	Step motor	1.45	1.52	1.69	1.95	2.13	2.30	2.48	2.65	2.83	2.48	2.59	2.88	3.35	3.64	3.91	4.21	4.49	4.76	5.04	5.32
	Servo motor	1.41	1.48	1.65	1.91	2.09	2.26	2.44	2.61	2.79	—	—	—	—	—	—	—	—	—	—	—



### Weight: In-line Motor Type

Model		LEY25D-X5										LEY32D-X5									
Stroke [mm]		30	50	100	150	200	250	300	350	400	30	50	100	150	200	250	300	350	400	450	500
Product weight [kg]	Step motor	1.46	1.53	1.70	1.96	2.14	2.31	2.49	2.66	2.84	2.49	2.60	2.89	3.36	3.65	3.92	4.22	4.50	4.77	5.05	5.33
	Servo motor	1.42	1.49	1.66	1.92	2.10	2.27	2.45	2.62	2.80	—	—	—	—	—	—	—	—	—	—	—

### Additional Weight

Size		25	32
Lock		0.33	0.63
Rod end male thread	Male thread	0.03	0.03
	Nut	0.02	0.02
Foot bracket (2 sets including mounting bolt)		0.08	0.14
Rod flange (including mounting bolt)		0.17	0.20
Head flange (including mounting bolt)			

**Top side parallel motor type: LEY<sup>25</sup><sub>32</sub>**

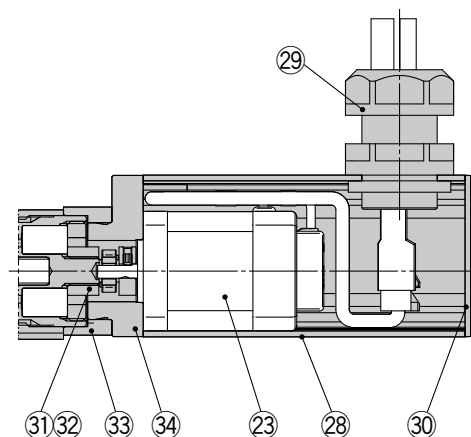

No.	Description	Material	Note
1	<b>Body</b>	Aluminum alloy	Anodized
2	<b>Ball screw shaft</b>	Alloy steel	
3	<b>Ball screw nut</b>	Synthetic resin/Alloy steel	
4	<b>Piston</b>	Aluminum alloy	
5	<b>Piston rod</b>	Stainless steel	Hard chrome plating
6	<b>Rod cover</b>	Aluminum alloy	
7	<b>Bearing holder</b>	Aluminum alloy	
8	<b>Rotation stopper</b>	Synthetic resin	
9	<b>Socket</b>	Free cutting carbon steel	Nickel plating
10	<b>Connected shaft</b>	Free cutting carbon steel	Nickel plating
11	<b>Bushing</b>	Bearing alloy	
12	<b>Bearing</b>	—	
13	<b>Return box</b>	Aluminum die-cast	Coating
14	<b>Return plate</b>	Aluminum die-cast	Coating
15	<b>Magnet</b>	—	
16	<b>Wear ring holder</b>	Stainless steel	Stroke 101 mm or more
17	<b>Wear ring</b>	Synthetic resin	Stroke 101 mm or more
18	<b>Screw shaft pulley</b>	Aluminum alloy	
19	<b>Motor pulley</b>	Aluminum alloy	

No.	Description	Material	Note
20	<b>Belt</b>	—	
21	<b>Scraper</b>	Synthetic resin	
22	<b>Retaining ring</b>	Steel for spring	Phosphate coating
23	<b>Motor</b>	—	
24	<b>Lube-retainer</b>	Felt	
25	<b>O-ring</b>	NBR	
26	<b>Gasket</b>	NBR	
27	<b>Motor adapter</b>	Aluminum alloy	Anodized
28	<b>Motor cover</b>	Aluminum alloy	Anodized
29	<b>Seal connector</b>	—	
30	<b>End cover</b>	Aluminum alloy	Anodized
31	<b>Hub</b>	Aluminum alloy	
32	<b>Spider</b>	NBR	
33	<b>Motor block</b>	Aluminum alloy	Anodized
34	<b>Motor adapter</b>	Aluminum alloy	LEY25 only
35	<b>Socket (Male thread)</b>	Free cutting carbon steel	Nickel plating
36	<b>Nut</b>	Alloy steel	Zinc chromating

No.	Size	Order no.
20	25	LE-D-2-2
	32	LE-D-2-3

Applied portion	Order no.
Piston rod	GR-S-010 (10 g)
	GR-S-020 (20 g)



# LEY-X5 Series


Incremental (Step Motor 24 VDC)

Incremental (Servo Motor 24 VDC)

Dust-tight/Water-jet-proof (IP65 Equivalent)

## Dimensions

### Top side parallel motor type

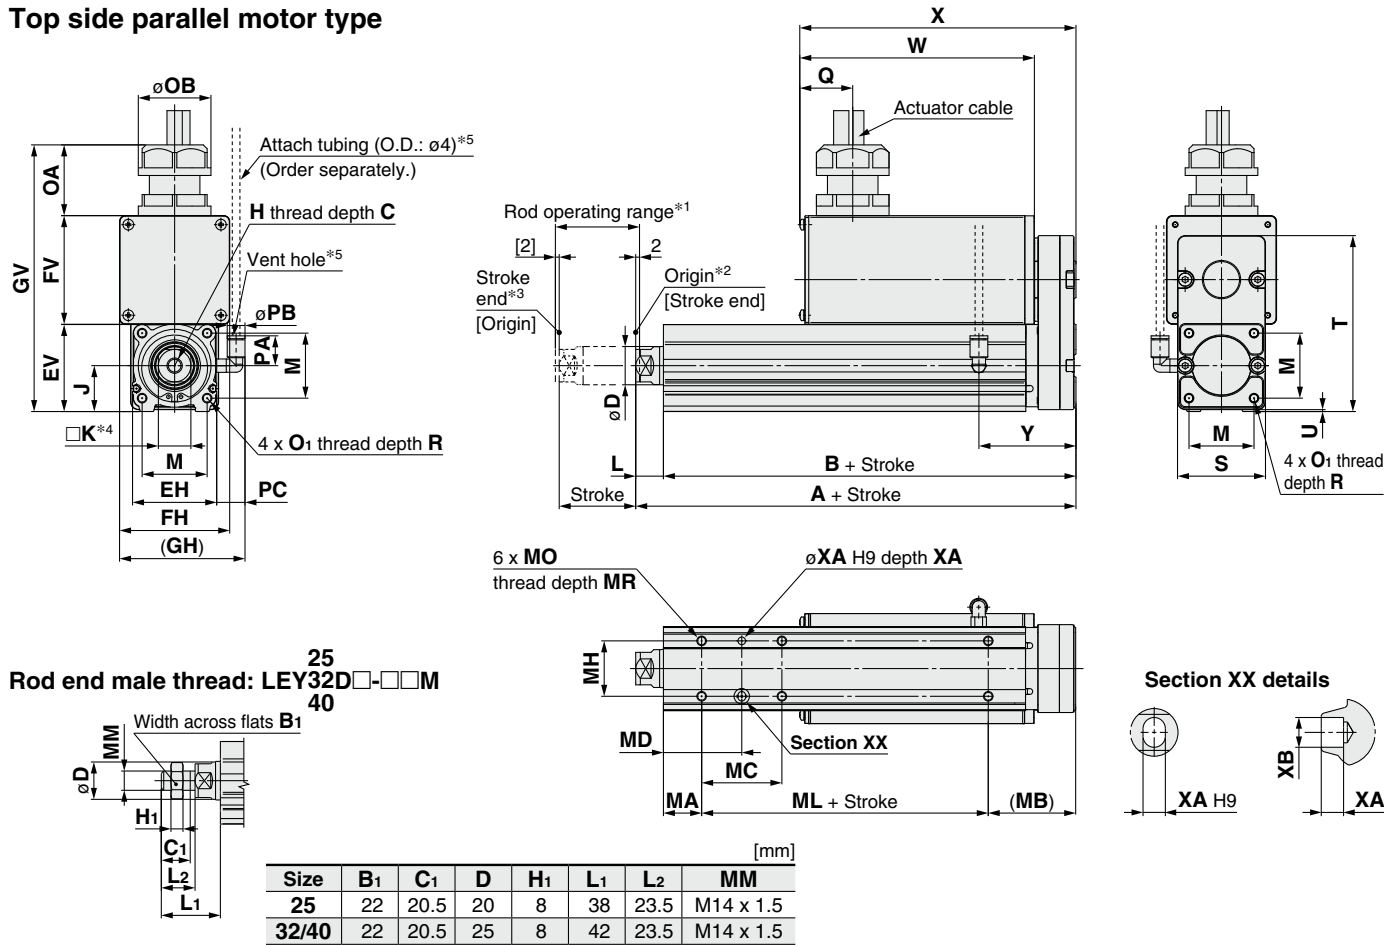

\* The L1 measurement is when the unit is in the original position. At this position, 2 mm at the end.

Size	Stroke range [mm]	A	B	C	D	EH	EV	FH	FV	GH	GV	H	J	K	L	M	O <sub>1</sub>
25	15 to 100	130.5	116														
	101 to 400	155.5	141	13	20	44	45.5	57.6	56.8	66.2	139.5	M8 x 1.25	24	17	14.5	34	M5 x 0.8
32	20 to 100	148.5	130														
	101 to 500	178.5	160	13	25	51	56.5	69.6	78.6	76.2	173.5	M8 x 1.25	31	22	18.5	40	M6 x 1.0

Size	Stroke range [mm]	R	OA	OB	PA	PB	Q	S	T	U	PC	W		X		Y
												Without lock	With lock	Without lock	With lock	
25	15 to 100	8	37	38	15.4	8.2	28	46	92	1	15.4	123	173	145	195	51
	101 to 400											123	173	145	195	
32	20 to 100	10	37	38	15.4	8.2	28	60	118	1	15.9	123	173	150	200	61
	101 to 500											123	173	150	200	

### Body Bottom Tapped

Size	Stroke range [mm]	MA	MB	MC	MD	MH	ML	MO	MR	XA	XB
25	15 to 39	20	46	24	32	29	50	M5 x 0.8	6.5	4	5
	40 to 100			42	41						
	101 to 124										
	125 to 200			59	49.5		75				
	201 to 400			76	58						
32	20 to 39	25	55	22	36	30	50	M6 x 1	8.5	5	6
	40 to 100										
	101 to 124			36	43						
	125 to 200			53	51.5		80				
	201 to 500			70	60						

\*1 This is the range within which the rod can move when it returns to origin. Make sure that workpieces mounted on the rod do not interfere with other workpieces or the facilities around the rod.

\*2 Position after returning to origin

\*3 [ ] for when the direction of return to origin has changed

\*4 The direction of rod end width across flats (□K) differs depending on the products.


\*5 The vent hole is the port for releasing to atmosphere. Do not apply pressure to this hole.

Attach tubing to the vent hole and place the end of the tubing so it is not exposed to dust or water.

For the mounting bracket dimensions, refer to the **Web Catalog**.

## Dimensions

### In-line motor type

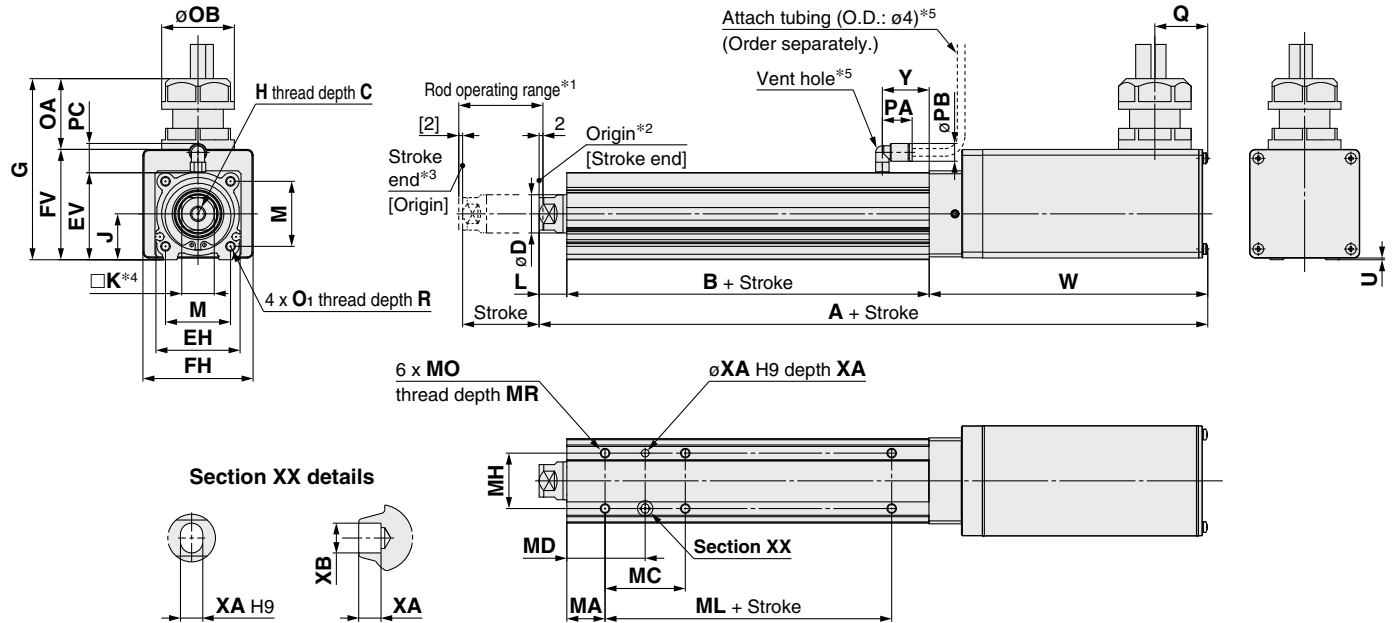

Size	Stroke range [mm]	A		B	C	D	EH	EV	FH	FV	G	H	J	K	L
		Without lock	With lock												
25	15 to 100	250	300	89.5	13	20	44	45.5	57.6	57.7	94.7	M8 x 1.25	24	17	14.5
	101 to 400	275	325	114.5											
32	20 to 100	265.5	315.5	96	13	25	51	56.5	69.6	79.6	116.6	M8 x 1.25	31	22	18.5
	101 to 500	295.5	345.5	126											

Size	Stroke range [mm]	M	O <sub>1</sub>	R	OA	OB	PA	PB	Q	U	PC	W		Y
												Without lock	With lock	
25	15 to 100	34	M5 x 0.8	8	37	38	15.4	8.2	28	0.9	15.9	146	196	24.5
	101 to 400											146	196	
32	20 to 100	40	M6 x 1.0	10	37	38	15.4	8.2	28	1	15.9	151	201	27
	101 to 500											151	201	

### Body Bottom Tapped

Size	Stroke range [mm]	MA	MC	MD	MH	ML	MO	MR	XA	XB
25	15 to 39	20	24	32	29	50	M5 x 0.8	6.5	4	5
	40 to 100		42	41		75				
	101 to 124		59	49.5						
	125 to 200		76	58						
	201 to 400									
32	20 to 39	25	22	36	30	50	M6 x 1	8.5	5	6
	40 to 100		36	43		80				
	101 to 124		53	51.5						
	125 to 200		70	60						
	201 to 500									

\*1 This is the range within which the rod can move when it returns to origin. Make sure that workpieces mounted on the rod do not interfere with other workpieces or the facilities around the rod.

\*2 Position after returning to origin

\*3 [ ] for when the direction of return to origin has changed

\*4 The direction of rod end width across flats (□K) differs depending on the products.

\*5 The vent hole is the port for releasing to atmosphere. Do not apply pressure to this hole.

Attach tubing to the vent hole and place the end of the tubing so it is not exposed to dust or water.

For the rod end male thread, refer to page 923.  
For the mounting bracket dimensions, refer to the **Web Catalog**.

# Rod Type

Dust-tight/Water-jet-proof (IP65 Equivalent)

## LEY-X5 (Made to Order) Series LEY25, 32

Refer to page 433 for model selection.

Size 63 is available by selecting option P. Refer to page 473.

LEY Series ▶ p. 931

### How to Order



LEY **H** **25** **S2** **B** - **100** - **S** **2** **A1** - **X5**

1 2 3 4 5 6 7 8 9 10 11 12 13

• Made to order:  
Dust-tight/  
Water-jet-proof

#### 1 Accuracy

Nil	Basic type
H	High-precision type

#### 2 Size

25
32

#### 3 Motor mounting position

Nil	Top side parallel
D	In-line

#### 4 Motor type

Symbol	Type	Output [W]	2 Size	12 Driver type	Compatible drivers
S2*1	AC servo motor	100	25	A1/A2	LECSA□-S1
S3	(Incremental encoder)	200	32	A1/A2	LECSA□-S3
T6*2	AC servo motor (Absolute encoder)	100	25	B2	LECSB2-T5
				C2	LECSC2-T5
				S2	LECSS2-T5
				N2	LECSN2-T5
				E2	LECSN2-T5-E
				92	LECSN2-T5-9
T7	AC servo motor (Absolute encoder)	200	32	P2	LECSN2-T5-P
				B2	LECSB2-T7
				C2	LECSC2-T7
				S2	LECSS2-T7
				ND2	LECSND2-T7
				ED2	LECSND2-T7-E
				9D2	LECSND2-T7-9
				PD2	LECSND2-T7-P

\*1 For motor type S2, the compatible driver part number suffix is S1.

\*2 For motor type T6, the compatible driver part number is LECS□2-T5.

#### 5 Lead [mm]

Symbol	LEY25□	LEY32□*1
A	12	16 (20)
B	6	8 (10)
C	3	4 (5)

\*1 The values shown in ( ) are the equivalent leads which include the pulley ratio for the size 32 top side parallel motor type.

#### 6 Stroke [mm]


30	30
to	to
500	500

\* For details, refer to the applicable stroke table below.

#### 7 Motor option

Nil	Without option
B	With lock*1

\*1 When "With lock" is selected for the top side parallel motor type, the motor body will stick out from the end of the body for size 25 with strokes of 30 mm or less. Check for interference with workpieces before selecting a model.



#### 8 Rod end thread

Nil	Rod end female thread
M	Rod end male thread (1 rod end nut is included.)

#### 9 Mounting\*1

Symbol	Type	Motor mounting position	
		Parallel	In-line
Nil	Ends tapped/ Body bottom tapped *2	●	●
L	Foot bracket	●	—
F	Rod flange*2	●*3	●
G	Head flange*2	●*4	—

\*1 The mounting bracket is shipped together with the product but does not come assembled.

\*2 For the horizontal cantilever mounting of the rod flange, head flange, or ends tapped types, use the actuator within the following stroke range.

• LEY25: 200 mm or less

• LEY32: 100 mm or less

\*3 The rod flange type is not available for the LEY25 with a 30 mm stroke and motor option "With lock."

\*4 The head flange type is not available for the LEY32.

#### Applicable Stroke Table

Model	Stroke											Manufacturable stroke range [mm]
	30	50	100	150	200	250	300	350	400	450	500	
LEY25	●	●	●	●	●	●	●	●	●	—	—	15 to 400
LEY32	●	●	●	●	●	●	●	●	●	●	●	20 to 500

\* Please contact SMC for non-standard strokes as they are produced as special orders.

\* For auto switches, refer to pages 936 and 937.



### 10 Cable type\*1 \*2

<b>Nil</b>	Without cable
<b>S</b>	Standard cable
<b>R</b>	Robotic cable

\*1 A motor cable and encoder cable are included with the product. (A lock cable is also included if motor option "B: With lock" is selected.)

\*2 Standard cable entry direction is  
 • Top side parallel: (A) Axis side  
 • In-line: (B) Counter axis side  
 (Refer to page 1123 for details.)

### 11 Cable length [m]\*1

<b>Nil</b>	Without cable
<b>2</b>	2
<b>5</b>	5
<b>A</b>	10

\*1 The length of the encoder, motor, and lock cables are the same.

### 12 Driver type\*1

	Compatible drivers	Power supply voltage [V]
<b>Nil</b>	Without driver	—
<b>A1</b>	LECSA1-S□	100 to 120
<b>A2</b>	LECSA2-S□	200 to 230
<b>B2</b>	LECSB2-T□	200 to 240
<b>C2</b>	LECSC2-T□	200 to 230
<b>S2</b>	LECSS2-T□	200 to 240
<b>N2</b>	LECSN2-T5	200 to 240
<b>E2</b>	LECSN2-T5-E	200 to 240
<b>92</b>	LECSN2-T5-9	200 to 240
<b>P2</b>	LECSN2-T5-P	200 to 240
<b>ND2</b>	LECSND2-T7	200 to 240
<b>ED2</b>	LECSND2-T7-E	200 to 240
<b>9D2</b>	LECSND2-T7-9	200 to 240
<b>PD2</b>	LECSND2-T7-P	200 to 240

\*1 When a driver type is selected, a cable is included. Select the cable type and cable length.

Example)

S2S2: Standard cable (2 m) + Driver (LECSS2)

S2: Standard cable (2 m)

Nil: Without cable and driver






\* When selecting "T6" for the motor type, select one of the following LECSN□-T series drivers: "N2," "E2," "92," or "P2."

### 13 I/O cable length [m]\*1

<b>Nil</b>	Without cable
<b>H</b>	Without cable (Connector only)
<b>1</b>	1.5

\*1 When "Nil: Without driver" is selected for the driver type, only "Nil: Without cable" can be selected.  
 Refer to page 1124 if an I/O cable is required.  
 (Options are shown on page 1124.)

### Compatible Drivers

Driver type	Pulse input type/ Positioning type	Pulse input type	CC-Link direct input type	SSCNET III/H type	Network card type
					
<b>Series</b>	<b>LECSA</b>	<b>LECSB-T</b>	<b>LECSC-T</b>	<b>LECSS-T</b>	<b>LECSN□-T</b>
<b>Number of point tables*1</b>	Up to 7	Up to 255	Up to 255 (2 stations occupied)	—	Up to 255
<b>Pulse input</b>	○	○	—	—	—
<b>Applicable network</b>	—	—	CC-Link	SSCNET III/H	PROFINET EtherCAT EtherNet/IP™
<b>Control encoder</b>	Incremental 17-bit encoder	Absolute 22-bit encoder	Absolute 18-bit encoder	Absolute 22-bit encoder	Absolute 22-bit encoder
<b>Communication function</b>	USB communication	USB communication, RS422 communication	USB communication, RS422 communication	USB communication	USB communication
<b>Power supply voltage [V]</b>	100 to 120 VAC (50/60 Hz) 200 to 230 VAC (50/60 Hz)	200 to 240 VAC (50/60 Hz)	200 to 240 VAC (50/60 Hz)	200 to 240 VAC (50/60 Hz)	200 to 240 VAC (50/60 Hz)
<b>Reference page</b>	1109				

\*1 The LECSN□-T point table mode is only available for PROFINET and EtherCAT.



# LEY-X5 Series

AC Servo Motor

Dust-tight/Water-jet-proof (IP65 Equivalent)

## Specifications: LECSA

Model			LEY25S2/T6-X5 /LEY25DS2/T6-X5			LEY32S3/T7-X5 (Parallel)			LEY32DS3/T7-X5 (In-line)			
Actuator specifications	Work load [kg]	Horizontal*1	18	50	50	30	60	60	30	60	60	
		Vertical*8	8	16	30	9	19	37	12	24	46	
	Force [N]*2 (Set value: 15 to 30%)*12		65 to 131	127 to 255	242 to 485	79 to 157	154 to 308	294 to 588	98 to 197	192 to 385	368 to 736	
	Max. speed [mm/s]*3	Stroke range	Up to 300	900	450	225	1200	600	300	1000	500	250
			305 to 400	600	300	150						
			405 to 500	—	—	—						
	Pushing speed [mm/s]*4		35 or less			30 or less			30 or less			
	Max. acceleration/deceleration [mm/s²]		5000			5000			5000			
	Positioning repeatability [mm]		Basic type	±0.02								
			High-precision type	±0.01								
	Lost motion [mm]*5		Basic type	0.1 or less								
			High-precision type	0.05 or less								
	Lead [mm] (including pulley ratio)			12	6	3	20	10	5	16	8	4
	Impact/Vibration resistance [m/s²]*6			50/20			50/20					
	Actuation type			Ball screw + Belt/Ball screw			Ball screw + Belt [1.25:1]			Ball screw		
	Guide type			Sliding bushing (Piston rod)			Sliding bushing (Piston rod)					
Enclosure*7			IP65 equivalent									
Operating temperature range [°C]			5 to 40			5 to 40						
Operating humidity range [%RH]			90 or less (No condensation)			90 or less (No condensation)						
Regeneration option			May be required depending on speed and work load (Refer to pages 435 and 436.)									
Electric specifications	Motor output/Size		100 W/□40			200 W/□60						
	Motor type		AC servo motor (100/200 VAC)			AC servo motor (100/200 VAC)						
	Encoder*11		Motor type S2, S3: Incremental 17-bit encoder (Resolution: 131072 p/rev) Motor type T6, T7: Absolute 22-bit encoder (Resolution: 4194304 p/rev) (For LECSB-T□, LECSS-T□) Motor type T6, T7: Absolute 18-bit encoder (Resolution: 262144 p/rev) (For LECSC-T□)									
	Power [W]*9		Max. power 445			Max. power 724			Max. power 724			
	Type*10		Non-magnetizing lock									
Lock unit specifications	Holding force [N]		131	255	485	157	308	588	197	385	736	
	Power at 20°C [W]		6.3			7.9			7.9			
	Rated voltage [V]		24 VDC <sup>0</sup> / <sub>-10%</sub>									

- \*1 This is the max. value of the horizontal work load. An external guide is necessary to support the load (Friction coefficient of guide: 0.1 or less). The actual work load changes according to the condition of the external guide. Confirm the load using the actual device.
- \*2 The force setting range (set values for the driver) for the force control with the torque control mode. Set it while referencing the "Force Conversion Graph" on pages 437 and 438. The drivers applicable to the pushing operation are "LECSB-T" and "LECS-T." The LECSB2-T is only applicable when the control method is positioning. The point table is used to set the pushing operation settings. To set the pushing operation settings, an additional dedicated file (pushing operation extension file) must be downloaded separately to be used with the setup software (MR Configurator2™: LEC-MRC2□). Please download this dedicated file from the SMC website: <https://www.smcworld.com>. When selecting the LECSS or LECSS2-T, combine it with upper level equipment (such as the Simple Motion module manufactured by Mitsubishi Electric Corporation) which has a pushing operation function.
- \*\* For customer-provided PLC and motion controller setting and usage instructions, confirm with the retailer or manufacturer.
- \*3 The allowable speed changes according to the stroke.
- \*4 The allowable collision speed for collision with the workpiece with the torque control mode
- \*5 A reference value for correcting errors in reciprocal operation

- \*6 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)  
Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)
- \*7 Cannot be used in an environment where oil such as cutting oil splashes or it is constantly exposed to water. Take appropriate protective measures. For details on enclosure, refer to the "Enclosure" on page 881.
- \*8 When mounting vertically and using the product facing upwards in an environment where water is present, take necessary measures to prevent water from splashing on the rod cover, because water will accumulate on the rod seal due to the structure of the product.
- \*9 Indicates the max. power during operation (including the driver). When selecting the power supply capacity, refer to the power supply capacity in the operation manual of each driver.
- \*10 Only when motor option "With lock" is selected
- \*11 The resolution will change depending on the driver type.
- \*12 For motor type T6 and T7, the set value is from 12 to 24%.

## Weight

### Product Weight

Series			LEY25S2/T6-X5 (Motor mounting position: Parallel)									LEY32S3/T7-X5 (Motor mounting position: Parallel)										
Stroke [mm]			30	50	100	150	200	250	300	350	400	30	50	100	150	200	250	300	350	400	450	500
Motor type	Incremental encoder		1.31	1.38	1.55	1.81	1.99	2.16	2.34	2.51	2.69	2.42	2.53	2.82	3.29	3.57	3.85	4.14	4.42	4.70	4.98	5.26
	Absolute encoder	T6/T7	1.4	1.5	1.6	1.9	2.0	2.2	2.4	2.6	2.7	2.3	2.4	2.7	3.2	3.5	3.8	4.1	4.3	4.6	4.9	5.2


Series			LEY25DS2/T6-X5 (Motor mounting position: In-line)									LEY32DS3/T7-X5 (Motor mounting position: In-line)										
Stroke [mm]			30	50	100	150	200	250	300	350	400	30	50	100	150	200	250	300	350	400	450	500
Motor type	Incremental encoder		1.34	1.41	1.58	1.84	2.02	2.19	2.37	2.54	2.72	2.44	2.55	2.84	3.31	3.59	3.87	4.16	4.44	4.72	5.00	5.28
	Absolute encoder	T6/T7	1.4	1.5	1.6	1.9	2.1	2.2	2.4	2.6	2.8	2.4	2.5	2.8	3.2	3.5	3.8	4.1	4.4	4.6	4.9	5.2

### Additional Weight



Size		25	32
Lock	Incremental encoder	0.20	0.40
	Absolute encoder	0.30	0.66
Rod end male thread	Male thread	0.03	0.03
	Nut	0.02	0.02
Foot bracket (2 sets including mounting bolt)		0.08	0.14
Rod flange (including mounting bolt)		0.17	0.20
Head flange (including mounting bolt)			
Double clevis (including pin, retaining ring, and mounting bolt)		0.16	0.22

## Construction

Top side parallel motor type: LEY<sup>25</sup><sub>32</sub>

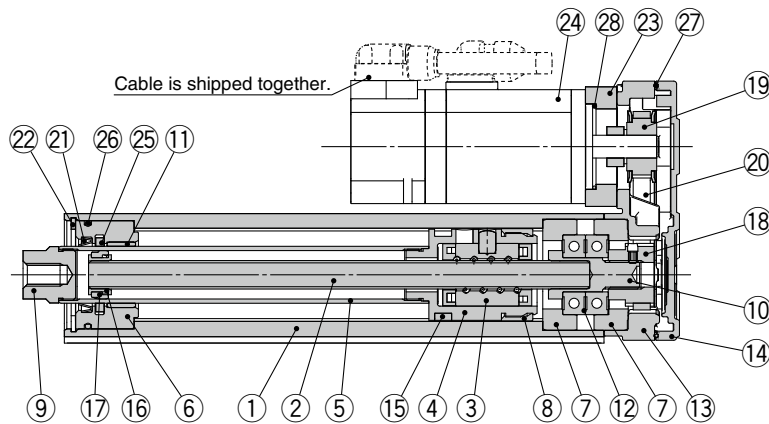

In-line motor type: LEY<sup>25</sup><sub>32</sub> D

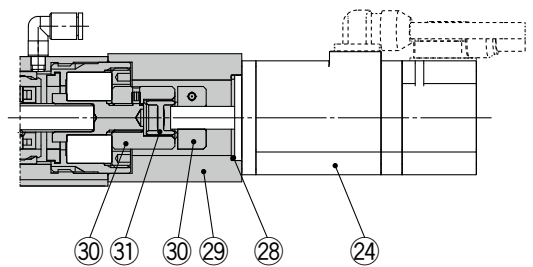

### Component Parts

No.	Description	Material	Note
1	<b>Body</b>	Aluminum alloy	Anodized
2	<b>Ball screw shaft</b>	Alloy steel	
3	<b>Ball screw nut</b>	Synthetic resin/Alloy steel	
4	<b>Piston</b>	Aluminum alloy	
5	<b>Piston rod</b>	Stainless steel	Hard chrome plating
6	<b>Rod cover</b>	Aluminum alloy	
7	<b>Bearing holder</b>	Aluminum alloy	
8	<b>Rotation stopper</b>	Synthetic resin	
9	<b>Socket</b>	Free cutting carbon steel	Nickel plating
10	<b>Connected shaft</b>	Free cutting carbon steel	Nickel plating
11	<b>Bushing</b>	Bearing alloy	
12	<b>Bearing</b>	—	
13	<b>Return box</b>	Aluminum die-cast	Coating
14	<b>Return plate</b>	Aluminum die-cast	Coating
15	<b>Magnet</b>	—	
16	<b>Wear ring holder</b>	Stainless steel	Stroke 101 mm or more
17	<b>Wear ring</b>	Synthetic resin	Stroke 101 mm or more

No.	Description	Material	Note
18	<b>Screw shaft pulley</b>	Aluminum alloy	
19	<b>Motor pulley</b>	Aluminum alloy	
20	<b>Belt</b>	—	
21	<b>Scraper</b>	Synthetic resin	
22	<b>Retaining ring</b>	Steel for spring	Phosphate coating
23	<b>Motor adapter</b>	Aluminum alloy	Coating
24	<b>Motor</b>	—	
25	<b>Lube-retainer</b>	Felt	
26	<b>O-ring</b>	NBR	
27	<b>Gasket</b>	NBR	
28	<b>O-ring</b>	NBR	
29	<b>Motor block</b>	Aluminum alloy	Coating
30	<b>Hub</b>	Aluminum alloy	
31	<b>Spider</b>	Urethane	
32	<b>Socket (Male thread)</b>	Free cutting carbon steel	Nickel plating
33	<b>Nut</b>	Alloy steel	Trivalent chromating

### Replacement Parts (Top side parallel only)/Belt

No.	Size	Order no.
20	25	LE-D-2-2
	32	LE-D-2-4

### Replacement Parts/Grease Pack

Applied portion	Order no.
Piston rod	GR-S-010 (10 g) GR-S-020 (20 g)

\* Apply grease to the piston rod periodically.  
Grease should be applied when 1 million cycles or 200 km have been reached,  
whichever comes first.


# LEY-X5 Series

AC Servo Motor

Dust-tight/Water-jet-proof (IP65 Equivalent)

## Dimensions

### Top side parallel motor type: LEY<sub>32</sub><sup>25</sup>

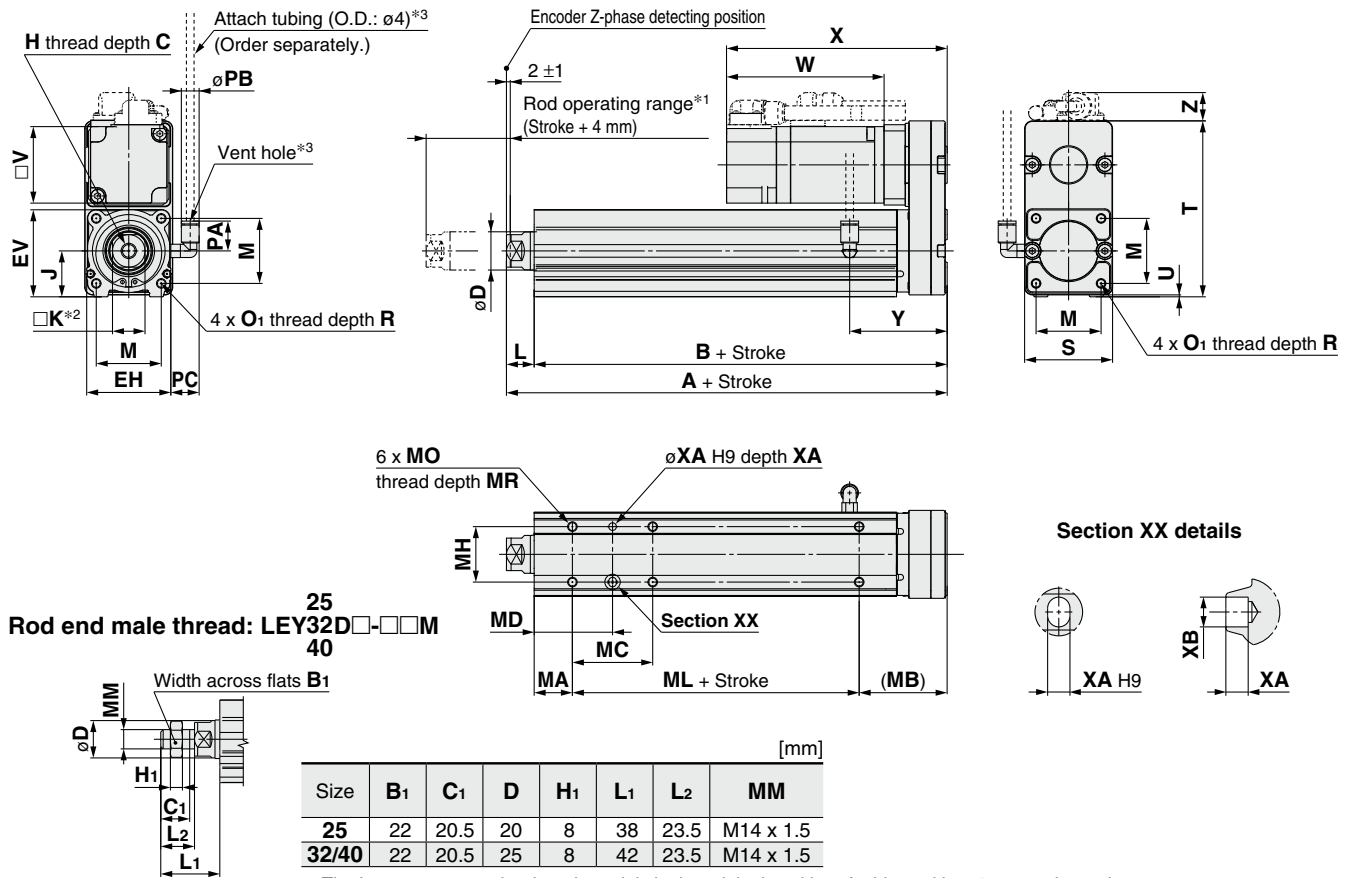

\* The L<sub>1</sub> measurement is when the unit is in the original position. At this position, 2 mm at the end.

Size	Stroke range [mm]	A	B	C	D	EH	EV	H	J	K	L	M	O <sub>1</sub>	R	PA	PB	V	S	T	U
25	15 to 100	130.5	116	13	20	44	45.5	M8 x 1.25	24	17	14.5	34	M5 x 0.8	8	15.4	8.2	40	46	92	1
	101 to 400	155.5	141																	
32	20 to 100	148.5	130	13	25	51	56.5	M8 x 1.25	31	22	18.5	40	M6 x 1.0	10	15.4	8.2	60	60	118	1
	101 to 500	178.5	160																	

Size	Stroke range [mm]	PC	Incremental encoder [S2/S3]						Absolute encoder [T6/T7]						Y
			Without lock			With lock			Without lock			With lock			
			W	X	Z	W	X	Z	W	X	Z	W	X	Z	
25	15 to 100	15.4	87	120	14.1	123.9	156.9	15.8	82.4	115.4	14.1	123	156	15.8	51
	101 to 400														
32	20 to 100	15.9	88.2	128.2	17.1	116.8	156.8	17.1	76.6	116.6	17.1	113.4	153.4	17.1	61
	101 to 500														

### Body Bottom Tapped

Size	Stroke range [mm]	MA	MB	MC	MD	MH	ML	MO	MR	XA	XB
25	15 to 39	20	46	24	32	29	50	M5 x 0.8	6.5	4	5
	40 to 100			42	41		75				
	101 to 124			59	49.5						
	125 to 200			76	58						
	201 to 400										
32	20 to 39	25	55	22	36	30	50	M6 x 1	8.5	5	6
	40 to 100			36	43		80				
	101 to 124			53	51.5						
	125 to 200			70	60						
	201 to 500										

\*1 This is the range within which the rod can move. Make sure that workpieces mounted on the rod do not interfere with other workpieces or the facilities around the rod.

\*2 The direction of rod end width across flats (□K) differs depending on the products.


\*3 The vent hole is the port for releasing to atmosphere. Do not apply pressure to this hole.

Attach tubing to the vent hole and place the end of the tubing so it is not exposed to dust or water.

For the mounting bracket dimensions, refer to the **Web Catalog**.

## Dimensions

### In-line motor type: LEY<sup>25</sup><sub>32</sub>D

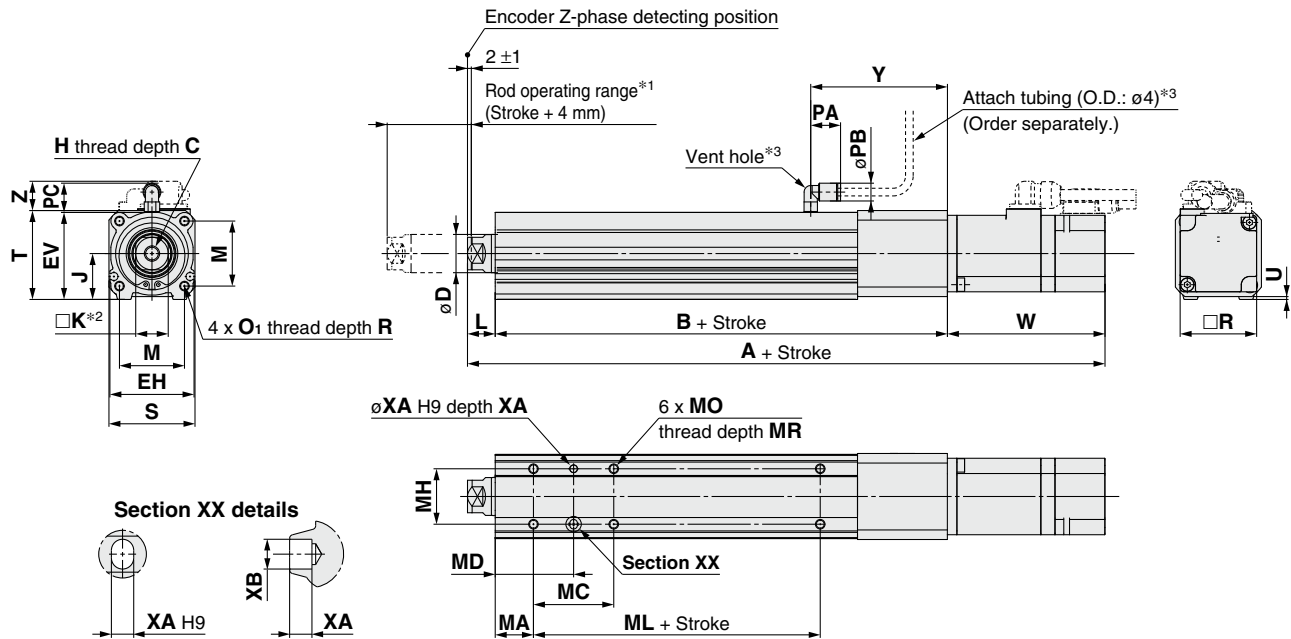

																	[mm]	
Size	Stroke range [mm]	Incremental encoder [S2/S6]						Absolute encoder [T6/T7]						B	C	D	EH	EV
		Without lock			With lock			Without lock			With lock							
		A	W	Z	A	W	Z	A	VB	VC	A	VB	VC					
25	15 to 100	238	87	14.6	274.9	123.9	16.3	233.4	82.4	14.6	274	123	16.3	136.5	13	20	44	45.5
	101 to 400	263			299.9			258.4			299			161.5				
32	20 to 100	262.7	88.2	17.1	291.3	116.8	17.1	251.1	76.6	17.1	287.9	113.4	17.1	156	13	25	51	56.5
	101 to 500	292.7			321.3			281.1			317.9			186				
Size	Stroke range [mm]	H		J	K	L	M	O <sub>1</sub>	R	PA	PB	V	S	T	U	PC	Y	
25	15 to 100	M8 x 1.25		24	17	14.5	34	M5 x 0.8	8	15.4	8.2	40	45	46.5	1.5	15.9	71.5	
	101 to 400																	
32	20 to 100	M8 x 1.25		31	22	18.5	40	M6 x 1.0	10	15.4	8.2	60	60	61	1	15.9	87	
	101 to 500																	

### Body Bottom Tapped

Size	Stroke range [mm]	MA	MC	MD	MH	ML	MO	MR	XA	XB
25	15 to 39	20	24	32	29	50	M5 x 0.8	6.5	4	5
	40 to 100		42	41		75				
	101 to 124		59	49.5		75				
	125 to 200		76	58		75				
	201 to 400		76	58		75				
32	20 to 39	25	22	36	30	50	M6 x 1	8.5	5	6
	40 to 100		36	43		80				
	101 to 124		53	51.5		80				
	125 to 200		53	51.5		80				
	201 to 500		70	60		80				

\*1 This is the range within which the rod can move. Make sure that workpieces mounted on the rod do not interfere with other workpieces or the facilities around the rod.

\*2 The direction of rod end width across flats (□K) differs depending on the products.

\*3 The vent hole is the port for releasing to atmosphere. Do not apply pressure to this hole. Attach tubing to the vent hole and place the end of the tubing so it is not exposed to dust or water.


For the rod end male thread, refer to page 929. For the mounting bracket dimensions, refer to the **Web Catalog**.

**Rod Type** Dust-tight/Water-jet-proof (IP65 Equivalent)**LEY-X5 (Made to Order) Series** LEY25, 32

Refer to page 411 for model selection.

Size 63 is available by selecting option P. Refer to page 489.

LECS Series ▶ p. 925

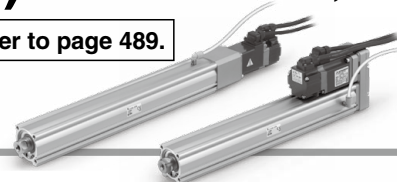**How to Order**

**LEY** **H** **25** **V6** **B** - **200** - **S** **3** **M2** - **X5**

1 2 3 4 5 6 7 8 9 10 11 12 13

• Made to order:  
Dust-tight/  
Water-jet-proof

**1 Accuracy**

<b>Nil</b>	Basic type
<b>H</b>	High-precision type

**2 Size**

<b>25</b>
<b>32</b>

**3 Motor mounting position**

<b>Nil</b>	Top side parallel
<b>D</b>	In-line

**4 Motor type**

Symbol	Type	Output [W]	2 Size	12 Driver type	Compatible drivers
<b>V6</b> *1	AC servo motor (Absolute encoder)	100	25	M2	LECYM2-V5
				U2	LECYU2-V5
<b>V7</b>	AC servo motor (Absolute encoder)	200	32	M2	LECYM2-V7
				U2	LECYU2-V7

\*1 For motor type V6, the compatible driver part number suffix is V5.

**5 Lead [mm]**

Symbol	LEY25	LEY32
<b>A</b>	12	16 (20)
<b>B</b>	6	8 (10)
<b>C</b>	3	4 (5)

\* The values shown in ( ) are the leads for the top side parallel motor type. (Equivalent leads which include the pulley ratio [1.25:1])

**6 Stroke [mm]**


<b>30</b>	30
<b>to</b>	to
<b>500</b>	500

\* For details, refer to the applicable stroke table below.

**7 Motor option**

<b>Nil</b>	Without option
<b>B</b>	With lock

\* When "With lock" is selected for the top side parallel motor type, the motor body will stick out from the end of the body for size 25 with strokes of 30 mm or less. Check for interference with workpieces before selecting a model.

**8 Rod end thread**

<b>Nil</b>	Rod end female thread
<b>M</b>	Rod end male thread (1 rod end nut is included.)

**Applicable Stroke Table**

●: Standard

Model	Stroke [mm]	30	50	100	150	200	250	300	350	400	450	500	Manufacturable stroke range
<b>LEY25</b>		●	●	●	●	●	●	●	●	●	—	—	15 to 400
<b>LEY32</b>		●	●	●	●	●	●	●	●	●	●	●	20 to 500

\* Please contact SMC for non-standard strokes as they are produced as special orders.

For auto switches, refer to pages 936 and 937.

## 9 Mounting<sup>\*1</sup>

Symbol	Type	Motor mounting position	
		Parallel	In-line
<b>Nil</b>	Ends tapped/ Body bottom tapped <sup>*2</sup>	●	●
<b>L</b>	Foot bracket	●	—
<b>F</b>	Rod flange <sup>*2</sup>	● <sup>*3</sup>	●
<b>G</b>	Head flange <sup>*2</sup>	● <sup>*4</sup>	—

<sup>\*1</sup> The mounting bracket is shipped together with the product but does not come assembled.

<sup>\*2</sup> For the horizontal cantilever mounting of the ends tapped, rod flange, or head flange types, use the actuator within the following stroke range.  
· LEY25: 200 mm or less · LEY32: 100 mm or less

<sup>\*3</sup> The rod flange type is not available for the LEY25 with a 30 mm stroke and motor option "With lock."

<sup>\*4</sup> The head flange type is not available for the LEY32.

## 10 Cable type<sup>\*1</sup>

<b>Nil</b>	Without cable
<b>S</b>	Standard cable
<b>R</b>	Robotic cable

<sup>\*1</sup> A motor cable and encoder cable are included with the product.

The motor cable for lock option is included when the motor with lock option is selected.

## 11 Cable length [m]<sup>\*1</sup>

<b>Nil</b>	Without cable
<b>3</b>	3
<b>5</b>	5
<b>A</b>	10
<b>C</b>	20

<sup>\*1</sup> The length of the motor and encoder cables are the same. (For with lock)

## 12 Driver type

	Compatible drivers	Power supply voltage [V]
<b>Nil</b>	Without driver	—
<b>M2</b>	LECYM2-V□	200 to 230
<b>U2</b>	LECYU2-V□	200 to 230

<sup>\*</sup> When a driver type is selected, a cable is included. Select the cable type and cable length.



## 13 I/O cable length [m]<sup>\*1</sup>

<b>Nil</b>	Without cable
<b>H</b>	Without cable (Connector only)
<b>1</b>	1.5

<sup>\*1</sup> When "Nil: Without driver" is selected for the driver type, only "Nil: Without cable" can be selected.

Refer to page 1135 if an I/O cable is required.  
(Options are shown on page 1135.)

## Compatible Drivers

Driver type	MECHATROLINK-II type	MECHATROLINK-III type
		
<b>Series</b>	<b>LECYM</b>	<b>LECYU</b>
<b>Applicable network</b>	MECHATROLINK-II	MECHATROLINK-III
<b>Control encoder</b>	Absolute 20-bit encoder	
<b>Communication device</b>	USB communication, RS-422 communication	
<b>Power supply voltage [V]</b>	200 to 230 VAC (50/60 Hz)	
<b>Reference page</b>	1128	



# LEY-X5 Series

AC Servo Motor

Dust-tight/Water-jet-proof (IP65 Equivalent)

## Specifications: LECY

Model			LEY25V6-X5/LEY25DV6-X5			LEY32V7-X5 (Parallel)			LEY32DV7-X5 (In-line)			
Actuator specifications	Work load [kg]		Horizontal <sup>*1</sup>	18	50	50	30	60	60	30	60	60
			Vertical <sup>*9</sup>	8	16	30	9	19	37	12	24	46
	Force [N] <sup>*2</sup> (Set value: 45 to 90%)			65 to 131	127 to 255	242 to 485	79 to 157	154 to 308	294 to 588	98 to 197	192 to 385	368 to 736
	Max. speed [mm/s]	Stroke range	Up to 300	900	450	225	1200	600	300	1000	500	250
			305 to 400	600	300	150						
			405 to 500	—	—	—						
	Pushing speed [mm/s] <sup>*4</sup>			35 or less			30 or less			30 or less		
	Max. acceleration/deceleration [mm/s <sup>2</sup> ]			5000			5000					
	Positioning repeatability [mm]		Basic type	±0.02			±0.02					
			High-precision type	±0.01			±0.01					
	Lost motion [mm] <sup>*5</sup>		Basic type	0.1 or less			0.1 or less					
High-precision type			0.05 or less			0.05 or less						
Lead [mm] (including pulley ratio)			12	6	3	20 <sup>*6</sup>	10 <sup>*6</sup>	5 <sup>*6</sup>	16	8	4	
Impact/Vibration resistance [m/s <sup>2</sup> ] <sup>*7</sup>			50/20			50/20						
Actuation type			Ball screw + Belt (LEY□□)/Ball screw (LEY□□)			Ball screw + Belt [1.25:1]			Ball screw			
Guide type			Sliding bushing (Piston rod)			Sliding bushing (Piston rod)						
Enclosure <sup>*8</sup>						IP65 equivalent						
Operating temperature range [°C]			5 to 40			5 to 40						
Operating humidity range [%RH]			90 or less (No condensation)			90 or less (No condensation)						
Required conditions for the regenerative resistor <sup>*10</sup> [kg]		Horizontal	Not required			Not required						
		Vertical	6 or more			4 or more						
Electric specifications	Motor output/Size		100 W/□40			200 W/□60						
	Motor type		AC servo motor (200 VAC)			AC servo motor (200 VAC)						
	Encoder		Absolute 20-bit encoder (Resolution: 1048576 p/rev)									
	Power [W] <sup>*11</sup>		Max. power 445			Max. power 724			Max. power 724			
Lock unit specifications	Type <sup>*12</sup>					Non-magnetizing lock						
	Holding force [N]		131	255	485	157	308	588	197	385	736	
	Power at 20°C [W]		5.5			6			6			
	Rated voltage [V]					24 VDC <sup>+10%</sup> <sub>0</sub>						

\*1 This is the max. value of the horizontal work load. An external guide is necessary to support the load (Friction coefficient of guide: 0.1 or less). The actual work load changes according to the condition of the external guide. Confirm the load using the actual device.

\*2 The force setting range (set values for the driver) for the force control with the torque control mode

Set it while referencing the "Force Conversion Graph (Guide)" on page 445.

\*3 The allowable speed changes according to the stroke.

\*4 The allowable collision speed for collision with the workpiece with the torque control mode

\*5 A reference value for correcting errors in reciprocal operation

\*6 Equivalent leads which include the pulley ratio [1.25:1]

\*7 Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.) Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz. The test was performed in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

\*8 Cannot be used in an environment where oil such as cutting oil splashes or it is constantly exposed to water

Take appropriate protective measures. For details on enclosure, refer to the "Enclosure" on page 881.

\*9 When mounting vertically and using the product facing upwards in an environment where water is present, take necessary measures to prevent water from splashing on the rod cover, because water will accumulate on the rod seal due to the structure of the product.

\*10 The work load conditions which require the regenerative resistor when operating at the max. speed (Duty ratio: 100%). Order the regenerative resistor separately. For details, refer to the "Required Conditions for the Regenerative Resistor (Guide)" on pages 443 and 444.

\*11 Indicates the max. power during operation (including the driver) When selecting the power supply capacity, refer to the power supply capacity in the operation manual of each driver.

\*12 Only when motor option "With lock" is selected

## Weight

### Product Weight

[kg]

Series	LEY25V6 (Motor mounting position: Parallel)										LEY32V7 (Motor mounting position: Parallel)									
Stroke [mm]	30	50	100	150	200	250	300	350	400	30	50	100	150	200	250	300	350	400	450	500
Weight [kg]	1.2	1.3	1.6	1.7	1.9	2.1	2.2	2.4	2.6	2.3	2.4	2.7	3.2	3.5	3.8	4.0	4.3	4.6	4.9	5.2

Series	LEY25DV6 (Motor mounting position: In-line)										LEY32DV7 (Motor mounting position: In-line)									
Stroke [mm]	30	50	100	150	200	250	300	350	400	30	50	100	150	200	250	300	350	400	450	500
Weight [kg]	1.2	1.3	1.5	1.7	1.9	2.1	2.3	2.4	2.6	2.3	2.4	2.7	3.2	3.5	3.8	4.1	4.3	4.6	4.9	5.2

### Additional Weight



[kg]

Size		25	32
Lock		0.30	0.60
Rod end male thread	Male thread	0.03	0.03
	Nut	0.02	0.02
Foot bracket (2 sets including mounting bolt)		0.08	0.14
Rod flange (including mounting bolt)		0.17	0.20
Head flange (including mounting bolt)			




## Dimensions

### Top side parallel motor type: LEY<sub>32</sub><sup>25</sup>

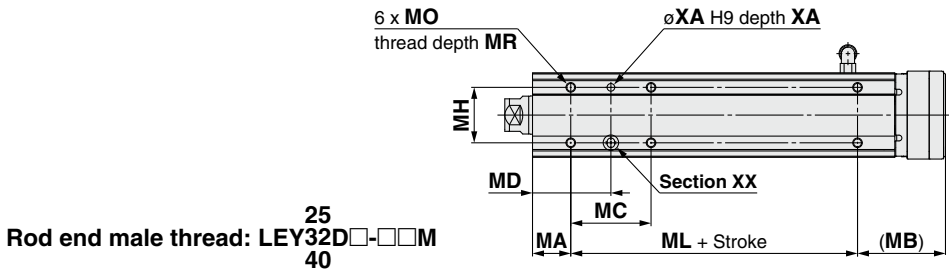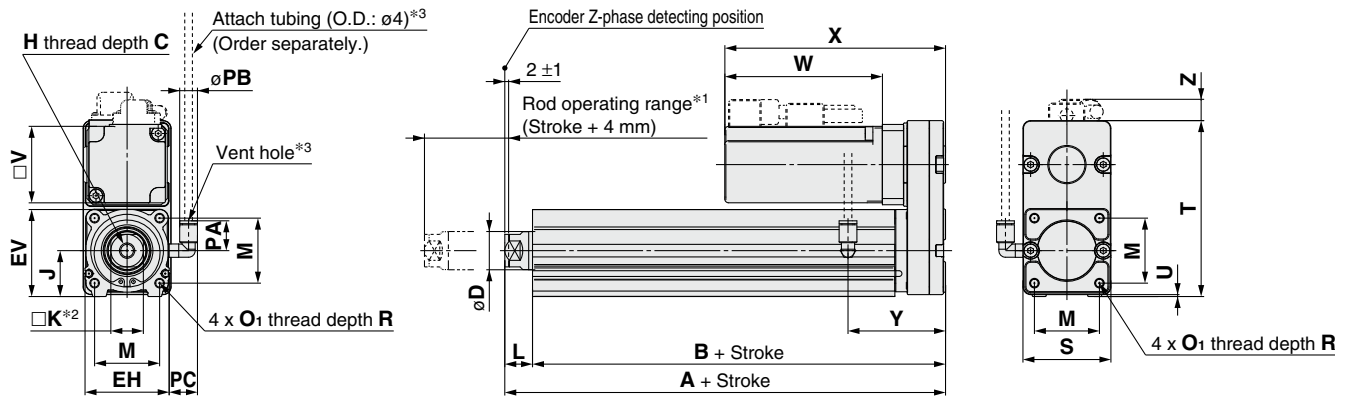

Rod end male thread: LEY<sub>32</sub>D□-□□M  
40



Size	B <sub>1</sub>	C <sub>1</sub>	D	H <sub>1</sub>	L <sub>1</sub>	L <sub>2</sub>	MM
25	22	20.5	20	8	38	23.5	M14 x 1.5
32/40	22	20.5	25	8	42	23.5	M14 x 1.5

\* The L<sub>1</sub> measurement is when the unit is in the original position. At this position, 2 mm at the end.

Size	Stroke range [mm]	A	B	C	D	EH	EV	H	J	K	L	M	O <sub>1</sub>	R	PA	PB	V
25	15 to 100	130.5	116	13	20	44	45.5	M8 x 1.25	24	17	14.5	34	M5 x 0.8	8	15.4	8.2	40
	101 to 400	155.5	141														
32	20 to 100	148.5	130	13	25	51	56.5	M8 x 1.25	31	22	18.5	40	M6 x 1.0	10	15.4	8.2	60
	101 to 500	178.5	160														

Size	Stroke range [mm]	S	T	U	PC	Without lock			With lock			Y
						W	X	Z	W	X	Z	
25	15 to 100	46	92	1	15.4	82.5	115.5	11	127.5	160.5	11	51
	101 to 400											
32	20 to 100	60	118	1	15.9	80	120	14	120	160	14	61
	101 to 500											

### Body Bottom Tapped

Size	Stroke range [mm]	MA	MB	MC	MD	MH	ML	MO	MR	XA	XB
25	15 to 39	20	46	24	32	29	50	M5 x 0.8	6.5	4	5
	40 to 100			42	41		75				
	101 to 124			59	49.5						
	125 to 200			76	58						
	201 to 400										
32	20 to 39	25	55	22	36	30	50	M6 x 1	8.5	5	6
	40 to 100			36	43		80				
	101 to 124			53	51.5						
	125 to 200			70	60						
	201 to 500										

\*1 This is the range within which the rod can move. Make sure that workpieces mounted on the rod do not interfere with other workpieces or the facilities around the rod.

\*2 The direction of rod end width across flats (□K) differs depending on the products.

\*3 The vent hole is the port for releasing to atmosphere. Do not apply pressure to this hole.

Attach tubing to the vent hole and place the end of the tubing so it is not exposed to dust or water.

For the mounting bracket dimensions, refer to the **Web Catalog**.


# LEY-X5 Series

AC Servo Motor

Dust-tight/Water-jet-proof (IP65 Equivalent)

## Dimensions

In-line motor type: LEY<sup>25</sup><sub>32</sub>D

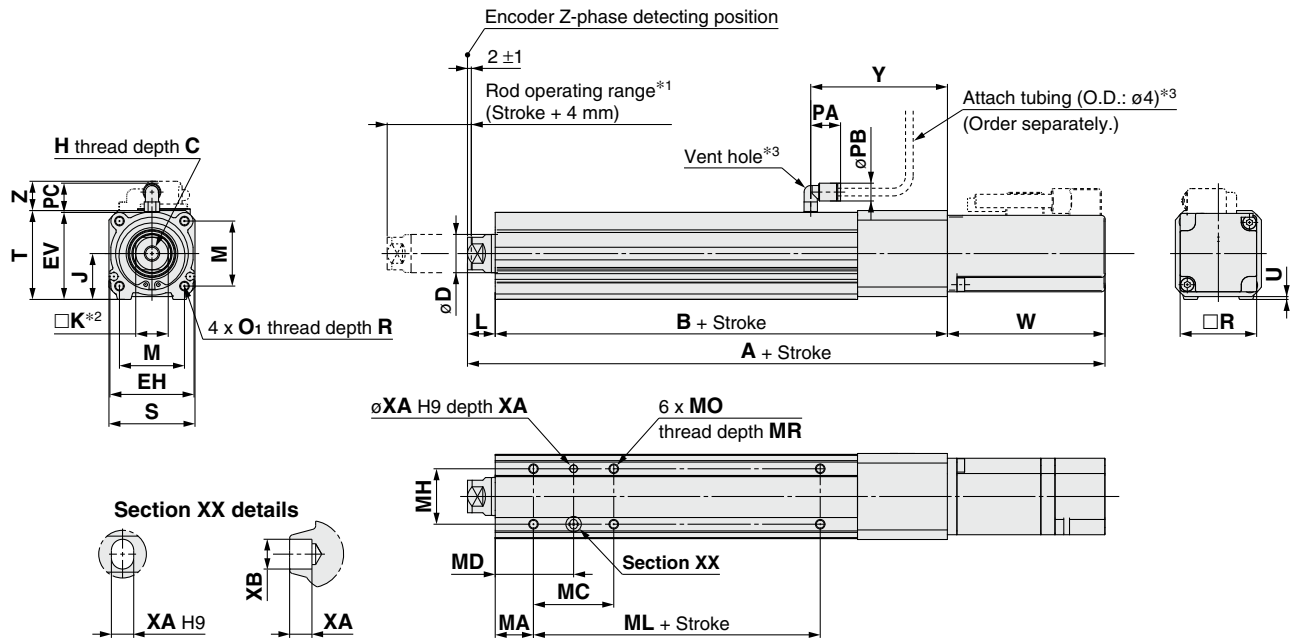

[mm]																
Size	Stroke range [mm]	Without lock			With lock			B	C	D	EH	EV				
		A	W	Z	A	W	Z									
25	15 to 100	233.5	82.5	11.5	278.5	127.5	11.5	136.5	13	20	44	45.5				
	101 to 400	258.5			303.5			161.5								
32	20 to 100	254.5	80	14	294.5	120	14	156	13	25	51	56.5				
	101 to 500	284.5			324.5			186								
Size	Stroke range [mm]	H	J	K	L	M	O <sub>1</sub>	R	PA	PB	V	S	T	U	PC	Y
25	15 to 100	M8 x 1.25	24	17	14.5	34	M5 x 0.8	8	15.4	8.2	40	45	46.5	1.5	15.9	71.5
	101 to 400															
32	20 to 100	M8 x 1.25	31	22	18.5	40	M6 x 1.0	10	15.4	8.2	60	60	61	1	15.9	87
	101 to 500															

## Body Bottom Tapped

Size	Stroke range [mm]	MA	MC	MD	MH	ML	MO	MR	XA	XB
25	15 to 39	20	24	32	29	50	M5 x 0.8	6.5	4	5
	40 to 100		42	41		75				
	101 to 124		59	49.5						
	125 to 200		76	58						
	201 to 400									
32	20 to 39	25	22	36	30	50	M6 x 1	8.5	5	6
	40 to 100		36	43		80				
	101 to 124		53	51.5						
	125 to 200		70	60						
	201 to 500									

\*1 This is the range within which the rod can move. Make sure that workpieces mounted on the rod do not interfere with other workpieces or the facilities around the rod.

\*2 The direction of rod end width across flats (□K) differs depending on the products.

\*3 The vent hole is the port for releasing to atmosphere. Do not apply pressure to this hole.


Attach tubing to the vent hole and place the end of the tubing so it is not exposed to dust or water.

For the rod end male thread, refer to page 934.  
For the mounting bracket dimensions, refer to the **Web Catalog**.

# LEY-X5 Series Auto Switch Mounting


## Auto Switch Proper Mounting Position

Applicable auto switch: D-M9□A(V)



LEY25, 32


➔ Switch mounting groove

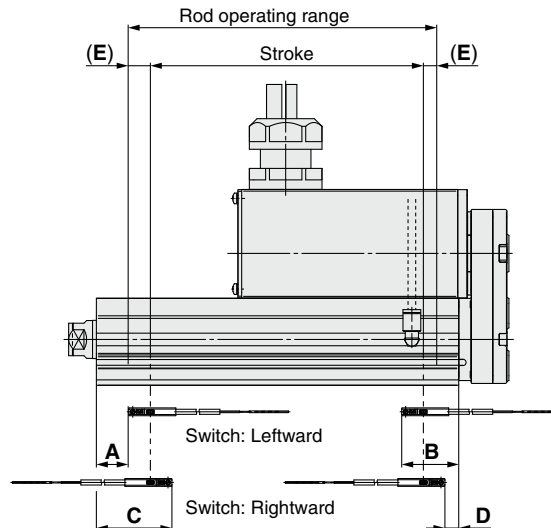

								[mm]
Size	Stroke range	Auto switch position				Return to origin distance	Operating range	
		Leftward mounting		Rightward mounting				
		A	B	C	D			
25	15 to 100	27	62.5	39	50.5	(2)	4.2	
	105 to 400	52		64				
32	20 to 100	30.5	85.5	42.5	53.5	(2)	4.9	
	105 to 500	90.5		102.5				

- \* The values in the table above are to be used as a reference when mounting auto switches for stroke end detection. Adjust the auto switch after confirming the operating conditions in the actual setting.
- \* An auto switch cannot be mounted on the same side as a motor.
- \* For LEYG series models (with a guide), an auto switch cannot be mounted on the guide attachment side (rod side).
- \* Since the operating range is provided as a guideline including hysteresis, it cannot be guaranteed (assuming approx.  $\pm 30\%$  dispersion). It may change substantially depending on the ambient environment.

## Auto Switch Mounting

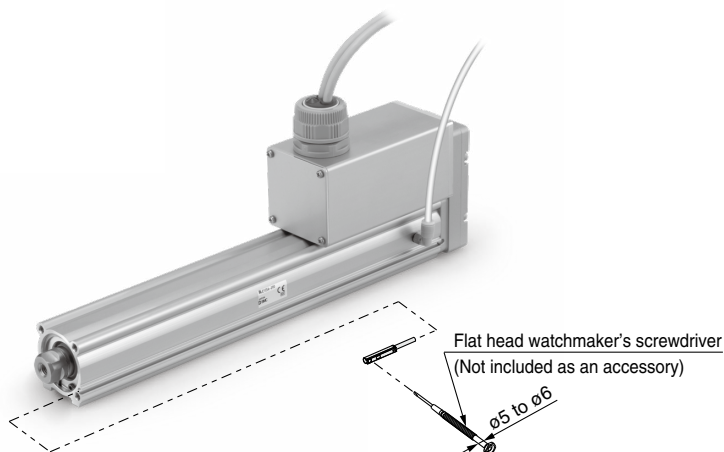

### Tightening Torque for Auto Switch Mounting Screw [N·m]

Auto switch model	Tightening torque
D-M9□A(V)	0.05 to 0.10


- \* When tightening the auto switch mounting screw (included with the auto switch), use a watchmaker's screwdriver with a handle diameter of 5 to 6 mm.

# Water Resistant 2-Color Indicator Solid State Auto Switch: Direct Mounting Type D-M9NA(V)/D-M9PA(V)/D-M9BA(V)



## Grommet

- Water (coolant) resistant type
- 2-wire load current is reduced (2.5 to 40 mA).
- The proper operating range can be determined by the color of the light. (Red → Green ← Red)
- Using flexible cable as standard spec.

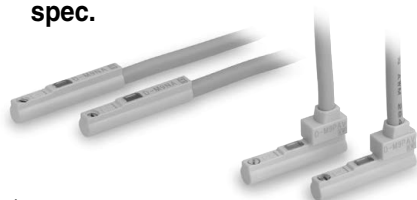

## Caution

### Precautions

Fix the auto switch with the existing screw installed on the auto switch body. The auto switch may be damaged if a screw other than the one supplied is used.  
Please contact SMC if using coolant liquid other than water based solution.

## Weight


[g]

Auto switch model	D-M9NA(V)	D-M9PA(V)	D-M9BA(V)
Lead wire length			
0.5 m (Nil)	8	7	
1 m (M)	14	13	
3 m (L)	41	38	
5 m (Z)	68	63	


## Dimensions

[mm]

### D-M9□A

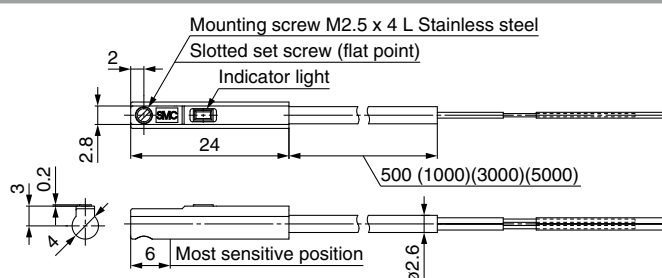

### D-M9□AV

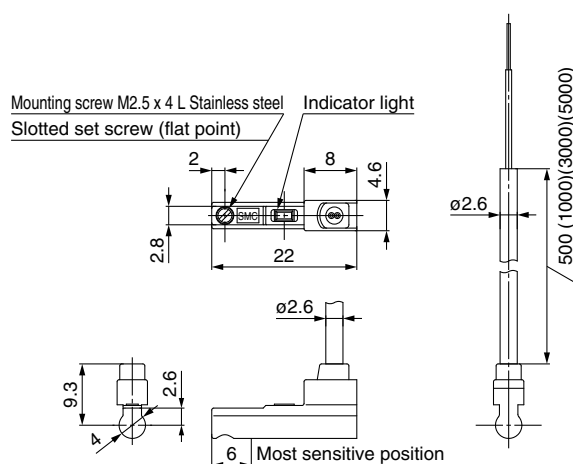

## Auto Switch Specifications

PLC: Programmable Logic Controller

D-M9□A, D-M9□AV (With indicator light)						
Auto switch model	D-M9NA	D-M9NAV	D-M9PA	D-M9PAV	D-M9BA	D-M9BAV
Electrical entry direction	In-line	Perpendicular	In-line	Perpendicular	In-line	Perpendicular
Wiring type	3-wire				2-wire	
Output type	NPN		PNP		—	
Applicable load	IC circuit, Relay, PLC				24 VDC relay, PLC	
Power supply voltage	5, 12, 24 VDC (4.5 to 28 V)				—	
Current consumption	10 mA or less				—	
Load voltage	28 VDC or less		—		24 VDC (10 to 28 VDC)	
Load current	40 mA or less				2.5 to 40 mA	
Internal voltage drop	0.8 V or less at 10 mA (2 V or less at 40 mA)				4 V or less	
Leakage current	100 μA or less at 24 VDC				0.8 mA or less	
Indicator light	Operating range ..... Red LED illuminates. Proper operating range ..... Green LED illuminates.					
Standard	CE/UKCA marking					

## Oilproof Flexible Heavy-duty Lead Wire Specifications

Auto switch model		D-M9NA□	D-M9NAV□	D-M9PA□	D-M9PAV□	D-M9BA□	D-M9BAV□
Sheath	Outside diameter [mm]	ø2.6					
Insulator	Number of cores	3 cores (Brown/Blue/Black)				2 cores (Brown/Blue)	
	Outside diameter [mm]	ø0.88					
Conductor	Effective area [mm²]	0.15					
	Strand diameter [mm]	ø0.05					
Min. bending radius [mm]		17					

\* Refer to page 1363 for solid state auto switch common specifications.

\* Refer to page 1363 for lead wire lengths.